
Reasoning or Simply Next Token Prediction? A Benchmark for Stress-Testing Large Language Models

Wentian Wang
USC

Paul Kantor
Rutgers & UW-Madison

Jacob Feldman
Rutgers

Lazaros Gallos
Rutgers

Hao Wang
Rutgers

Abstract

We propose MMLU-SR, a novel dataset designed to measure the true comprehension abilities of Large Language Models (LLMs) by challenging their performance in question-answering tasks with modified terms. We reasoned that an agent that “truly” understands a concept can still evaluate it when key terms are replaced by suitably defined alternate terms, and sought to differentiate such comprehension from mere text replacement. In our study, we modified standardized test questions by replacing a key term with a dummy word along with its definition. The key term could be in the context of questions, answers, or both questions and answers. Notwithstanding the high scores achieved by recent popular LLMs on the MMLU leaderboard, we found a substantial reduction in model performance after such replacement, suggesting poor comprehension. This new benchmark provides a rigorous benchmark for testing true model comprehension, and poses a challenge to the broader scientific community.

1 Introduction

Large Language Models (LLMs) have achieved impressive quantitative performance on a wide range of benchmarks, natural language processing [20, 17], general knowledge question-answering [10, 5], and coding [3, 13]. Additionally, by integrating with some advanced prompting techniques, such as Chain-of-Thought (CoT) [18] and its variants [19, 16, 21], LLMs seem to exhibit a certain level of reasoning abilities in solving question-answer problems. However, some studies [12] have raised concerns about data leakage (i.e., training models on the test sets), potentially rendering these results unreliable. These seemingly contradictory findings prompt the question of whether LLMs are genuinely performing reasoning tasks or merely predicting the next token. If LLMs are truly capable of reasoning, they should remain unaffected by the replacement of key symbols within the test set.

A hallmark of human intelligence is the ability to handle abstract concepts and to associate them with arbitrary terms [14]. With a few exceptions such as onomatopoeia, the connection between particular words and particular meanings is arbitrary, and identical concepts are invoked by different words in different human languages (e.g. *dog* vs *chien*). Similarly, human reasoners are capable of analogizing structural relationships from one domain to another, meaning that conceptual equivalence can be retained even when details change [9]. It follows that true human-like comprehension should be unimpaired when terms are substituted for synonymous terms, as long as the substitution is comprehensibly defined.

We wondered whether LLM performance reflects true human-like comprehension in this sense, or whether it relies heavily on the specific terms used on training corpora. To assess this, we propose MMLU-SR, a new benchmark dataset that uses symbol replacement to remove some important terms from the questions and answers as shown in Fig. 1. Instead of relying on memorized terms, this approach tests whether LLMs can reason using the definitions and concepts of those terms, ensuring a more robust evaluation of their understanding.

Reasoning or Simply Next Token Prediction?

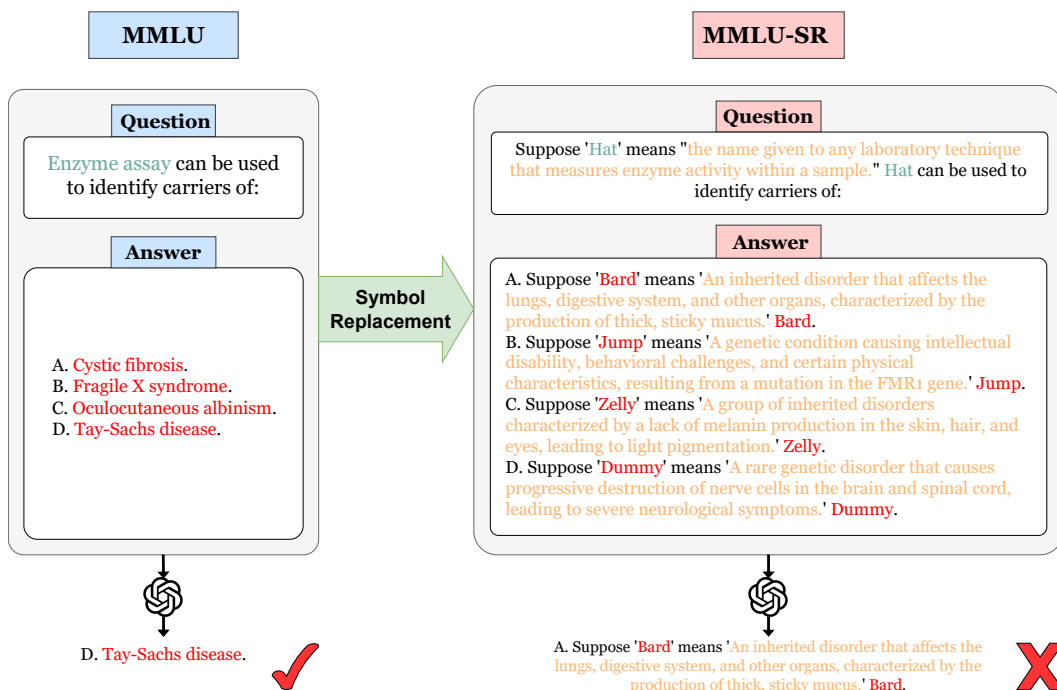


Figure 1: Illustration of our MMLU-SR testing scenarios. The red-colored and green-colored words represent the original symbols in the MMLU dataset showing in answers and questions, which are replaced in the MMLU-SR dataset with random words followed by their definitions, shown in orange text. The example question from the MMLU dataset is correctly answered by both GPT-3.5-turbo and ChatGPT-4. However, the modified question from the MMLU-SR “Question and Answer” dataset is answered incorrectly by both models.

Our evaluations on gpt-3.5-turbo, llama3-8b, and gemini-1.0-pro showed significantly lower performance on MMLU-SR compared to the original MMLU, demonstrating the effectiveness of our approach in preventing models from exploiting memorized data. MMLU-SR thus provides a more challenging and revealing test of LLMs’ true reasoning abilities and understanding.

Our findings indicate that while current LLMs excel on traditional benchmarks, they face substantial difficulties when key terms are replaced, highlighting the need for benchmarks like MMLU-SR to ensure robust and comprehensive evaluation of language models.

2 Related Work

MMLU Variants Benchmarks. MMLU Variants such as CMMLU [11] and TMMLU+ [15] are adaptations of the MMLU benchmark for non-English languages; they translate the original MMLU questions and answers into other languages, providing a way to evaluate language models’ performance in non-English contexts. These benchmarks are crucial for assessing the generalizability and robustness of models across different languages and cultural settings. They preserve the original structure and intent of MMLU while enabling a broader examination of multilingual capabilities.

Reasoning Capabilities Benchmarks. Several advanced reasoning benchmarks have been developed to evaluate the reasoning capabilities of language models. AGIEval [22] includes standardized tests and civil service exams to assess reasoning and problem-solving skills in academic and professional scenarios. BoolQ [4] comprises over 15,000 real yes/no questions paired with Wikipedia passages to test the ability of models to infer answers from contextual information. GSM8K [6] features 8.5K grade-school math problems requiring multistep operations, targeting the evaluation of basic to

intermediate mathematical problem-solving abilities. DROP [7], an adversarially-created reading comprehension benchmark, challenges models to navigate references and perform discrete operations such as addition and sorting, thus evaluating their capacity to understand complex texts and execute logical reasoning tasks.

Unlike advanced reasoning benchmarks and MMLU variants for language extension (e.g., CMMLU and TMMLU+), our MMLU-SR benchmark introduces a novel approach. It enhances the challenge by replacing key words within the questions with random words, each paired with its definition, to differentiate from other benchmarks. This approach targets the models’ reasoning abilities by preventing reliance on memorized terms or vocabularies. By altering key symbols, MMLU-SR ensures that the evaluation focuses on the models’ understanding and reasoning, rather than their recognition of specific vocabulary, thus providing a more robust assessment of their true cognitive capabilities. We build our benchmark on the MMLU dataset because it encompasses a wide range of subjects across various domains, including Humanities, Social Sciences, STEM, and Other fields. This diverse subject matter ensures a comprehensive evaluation of language models’ reasoning capabilities, in contrast to other reasoning benchmarks that often focus exclusively on specific STEM subjects.

3 MMLU-SR Dataset

3.1 Dataset Construction

We have developed the MMLU-SR benchmark to rigorously evaluate the reasoning and understanding capabilities of LLMs. Inspired by ObjectNet [2], our benchmark contains three subsets: “Question Only”, “Answer Only”, and “Question and Answer”, each offering a unique perspective on the data to comprehensively assess LLM performance. To reduce human efforts in some redundant tasks, we proposed an automatic process to generate our dataset.

1. **Term Extraction and Definition Generation:** We extracted key terms from the questions and answers across all 57 subjects using the assistance of `gpt-3.5-turbo`. The process involved careful few-shot prompting, and we separately extracted the contexts of questions or answers alone to ensure the model focused on extracting terms rather than solving the questions. We also retrieved appropriate definitions within the specific subject for each extracted term. For terms where the automated process provided irrelevant or inaccurate definitions, we manually reviewed and corrected these entries.
2. **Dictionary Creation:** Once the terms and their definitions were extracted for each subject, we created JSON files where the terms served as keys and the definitions as values. This dictionary served as the basis for replacing terms in the questions and answers.
3. **Data Replacement:** Using the created dictionaries, we replaced the key terms in the questions with random dummy words followed by their definitions to create the “Question Only” dataset. Similarly, we did this for the answers to form the “Answer Only” dataset. This ensured that the context remained human-readable but required reasoning to infer the replaced terms. Some definitions and replacements required manual adjustments to ensure clarity and accuracy.
4. **Combining Question and Answer Sets:** After creating the “Question Only” and “Answer Only” datasets, we combined them to form the “Question and Answer” dataset. This step involved ensuring that the terms were consistently replaced across both questions and answers, maintaining the coherence of the dataset.
5. **Final Adjustments:** All CSV sheets were encoded in UTF-8 without headers. We manually fixed any typos that existed in the original MMLU dataset to ensure the quality and readability of the MMLU-SR dataset.

The MMLU-SR dataset was created using these meticulous steps. We formed both development and test sets, with the development set used for few-shot learning and the test set reserved for evaluation. This structured approach ensured that the dataset effectively tested the reasoning abilities of LLMs, differentiating between simple pattern recognition and genuine understanding. To effectively demonstrate how our MMLU-SR dataset can challenge more sophisticated models, we use Fig. 2, Fig. 3, and Fig. 4 that feature responses from ChatGPT-4. For comparative insights, example responses of ChatGPT-3.5 are available from Table 8, Table 9, and Table 10 in Appendix B.

Question Only

Question: Model Input
Suppose 'Hat' means "the name given to any laboratory technique that measures enzyme activity within a sample." Hat can be used to identify carriers of:
Answer:
A. Cystic fibrosis.
B. Fragile X syndrome.
C. Oculocutaneous albinism.
D. Tay-Sachs disease.

Model Output


The hypothetical technique "Hat," described as measuring enzyme activity within a sample. Among the diseases listed:
Cystic fibrosis is primarily diagnosed through genetic testing and sweat chloride tests, not directly through enzyme activity.
Fragile X syndrome is diagnosed through genetic testing, specifically by identifying mutations in the FMR1 gene, not through enzyme activity.
Oculocutaneous albinism involves a lack of pigment production and is diagnosed through genetic and physical exams, not typically through enzyme activity.
Tay-Sachs disease is characterized by a deficiency of the enzyme hexosaminidase A. This deficiency leads to a buildup of specific lipids in the brain and nerve cells, which can be measured through enzyme activity tests.
Given this, the best answer is: **D. Tay-Sachs disease.** 

Figure 2: Example ChatGPT-4 output of MMLU-SR “Question Only”.

Answer Only

Question: Model Input
Enzyme assay can be used to identify carriers of:
Answer:
A. Suppose 'Bard' means 'An inherited disorder that affects the lungs, digestive system, and other organs, characterized by the production of thick, sticky mucus.' Bard.
B. Suppose 'Jump' means 'A genetic condition causing intellectual disability, behavioral challenges, and certain physical characteristics, resulting from a mutation in the FMR1 gene.' Jump.
C. Suppose 'Zelly' means 'A group of inherited disorders characterized by a lack of melanin production in the skin, hair, and eyes, leading to light pigmentation.' Zelly.
D. Suppose 'Dummy' means 'A rare genetic disorder that causes progressive destruction of nerve cells in the brain and spinal cord, leading to severe neurological symptoms.' Dummy.

Model Output


To determine which disorder enzyme assays can identify among the given options, let's analyze each one:
A. 'Bard' sounds like Cystic Fibrosis. Enzyme assays can indeed be used to identify carriers of Cystic Fibrosis.
B. 'Jump' is indicative of Fragile X Syndrome. Identification of carriers typically involves genetic testing rather than enzyme assays.
C. 'Zelly' refers to albinism. Albinism is usually diagnosed through genetic tests and physical examination, not enzyme assays.
D. 'Dummy' is reminiscent of Huntington's Disease. Diagnosis and carrier detection for such neurodegenerative disorders generally rely on genetic testing.
Based on this analysis, the most appropriate answer is: **A. Bard (Cystic Fibrosis)** 

Figure 3: Example ChatGPT-4 output of MMLU-SR “Answer Only”

3.2 “Question Only” Dataset

Our “Question Only” dataset replaces key symbols with dummy words in most questions from the original MMLU dataset and keeps the answer choices unchanged. However, some straightforward questions, such as those involving only mathematical operations and numbers or simple questions like “Which of the following statements is true?”, remain unmodified. Generally, we changed at least one important term in the context, replacing it with a random dummy word followed by its definition; sometimes, multiple terms are replaced in the question to further test the model’s reasoning capabilities.

Fig. 2 illustrates an example where the dummy word ‘Hat’ is used to replace term ‘enzyme assay’ and is defined as “the name given to any laboratory technique that measures enzyme activity within a sample.” In this case, ChatGPT-4 successfully recognized ‘Hat’ and understood that the critical

Question and Answer

Model Input

Question:
Suppose 'Hat' means "the name given to any laboratory technique that measures enzyme activity within a sample." Hat can be used to identify carriers of:

Answer:
A. Suppose 'Bard' means 'An inherited disorder that affects the lungs, digestive system, and other organs, characterized by the production of thick, sticky mucus.' **Bard**.
B. Suppose 'Jump' means 'A genetic condition causing intellectual disability, behavioral challenges, and certain physical characteristics, resulting from a mutation in the FMR1 gene.' **Jump**.
C. Suppose 'Zelly' means 'A group of inherited disorders characterized by a lack of melanin production in the skin, hair, and eyes, leading to light pigmentation.' **Zelly**.
D. Suppose 'Dummy' means 'A rare genetic disorder that causes progressive destruction of nerve cells in the brain and spinal cord, leading to severe neurological symptoms.' **Dummy**.

Model Output

Given that 'Hat' is defined as any laboratory technique measuring enzyme activity, we can analyze:
Bard: refers to **Cystic Fibrosis**, and can be screened for using enzyme assays
Jump: refers to **Fragile X Syndrome**. Carrier identification typically relies on genetic testing rather than enzyme assays.
Zelly: refers to **albinism**. Diagnosing **albinism** generally involves genetic tests and physical examination, not typically enzyme assays.
Dummy: refers to a neurological condition like **Huntington's Disease**. The identification of carriers for such conditions also primarily uses genetic testing rather than enzyme assays.
Thus, the use of 'Hat' (enzyme assays) is most applicable to: **A. Bard (Cystic Fibrosis)** X

Figure 4: Example ChatGPT-4 output of MMLU-SR “Question and Answer”.

aspect was whether the diseases listed in the answer choices could be identified through enzyme activity. The model systematically eliminated each answer option, except for the last one, as it was the only choice that could be measured through enzyme activity tests. This setup effectively tests the model’s ability to comprehend and reason based on the provided definitions, rather than relying on pre-trained knowledge of the term ‘enzyme assay’.

3.3 “Answer Only” Dataset

Our “Answer Only” dataset modifies the answer choices in most text from the original MMLU dataset similarly to the “Question Only” dataset and keeps the questions unchanged. We ensure that at least one answer choice is modified among all four choices. In specific cases, such as “moral scenarios” where the answers are simple TRUE or FALSE choices, we make substitutions like “Suppose ‘Jack’ means ‘True’.” and “Suppose ‘Luck’ means ‘False’.” Despite these modifications, Table 3 still shows the accuracy drops among all models compared to the original “moral scenarios” sheet from MMLU. This underscores the challenge posed to models in adapting to these symbolic substitutions. Fig. 3 demonstrates that ChatGPT-4 was able to recognize the replaced terms in answer choices A, B, and C, identifying ‘Bard’ as ‘Cystic Fibrosis’, ‘Jump’ as ‘Fragile X Syndrome’, and ‘Zelly’ as ‘Albinism’. The model incorrectly identified the term ‘Dummy’ as ‘Huntington’s Disease’, while the correct term is ‘Tay-Sachs Disease’. Both disorders are indeed genetic, but they are distinct in their genetic causes and manifestations. It appears that ChatGPT-4, focusing on the broader category of ‘genetic disorder’ from the provided definition, inadvertently linked the description to the wrong disease. Such misidentification led the model to persist in incorrectly affirming that choice A (‘Bard’ as ‘Cystic Fibrosis’) was the correct answer (it is not).

3.4 “Question and Answer” Dataset

Our “Question and Answer” dataset integrates elements from both the “Question Only” and “Answer Only” datasets, replacing fundamental terms in both the questions and answer choices with dummy words followed by their definitions. As illustrated in Fig. 4, ChatGPT-4 successfully interpreted the original terms for each replaced term in answer choices A through C.

However, similar to the results seen in Fig. 3, the model incorrectly recognized the term in the last answer choice D (‘Dummy’ for Huntington’s Disease), leading to an incorrect answer. This outcome contrasts with Fig. 2, where ChatGPT-4 correctly answered the questions when only the questions

Table 1: Performance of gpt-3.5-turbo, gemini-1.0-pro, and llama3-8b.

Model	Humanities	Social Sciences	STEM	Other	Average
GPT-3.5-turbo					
MMLU (5-shot)	0.723	0.770	0.554	0.714	0.677
Question Only (5-shot)	0.661	0.702	0.506	0.641	0.616
Answer Only (5-shot)	0.540	0.595	0.441	0.538	0.520
Question and Answer (5-shot)	0.469	0.523	0.396	0.476	0.459
Gemini-1.0-pro					
MMLU (5-shot)	0.728	0.758	0.596	0.703	0.686
Question Only (5-shot)	0.687	0.744	0.539	0.658	0.645
Answer Only (5-shot)	0.619	0.670	0.504	0.591	0.586
Question and Answer (5-shot)	0.582	0.622	0.472	0.544	0.546
Llama3-8B					
MMLU (5-shot)	0.593	0.757	0.557	0.729	0.651
Question Only (5-shot)	0.546	0.685	0.507	0.668	0.595
Answer Only (5-shot)	0.455	0.599	0.460	0.557	0.510
Question and Answer (5-shot)	0.421	0.538	0.424	0.499	0.465

were modified. This illustrates that as complexity in context increases, with terms being replaced in both questions and answers, the model struggles to accurately identify the correct original term, consequently leading to an incorrect answer choice.

4 Experiments

4.1 Evaluation Protocol

We evaluated three large language models: gpt-3.5-turbo, gemini-1.0-pro, and llama3-8b. The assessments for gpt-3.5-turbo and gemini-1.0-pro were conducted using the Gemini-benchmark pipeline [1]. For these models, we set the temperature parameter to 0 and utilized carefully crafted prompts that required responses in the format of “Answer: Letter of Choice.” This approach ensures that the generated responses are directly comparable and suitable for evaluation. Additionally, both models were evaluated in the 5-shot setting, using examples from our development dataset to enhance their contextual understanding. llama3-8b was evaluated using the lm-evaluation-harness framework [8]. This model employed a different evaluation strategy; it uses log likelihood to determine the model’s responses. Consistent with the other models, llama3-8b also uses the same 5-shot setting, ensuring a standardized comparison across all tests.

4.2 Results and Analysis

General Trend. Table 1 shows the accuracy of the three models gpt-3.5-turbo, gemini-1.0-pro, and llama3-8b evaluated in both MMLU and our MMLU-SR. The data highlights how each model performs in the Humanities, Social Sciences, STEM, and Other academic fields, providing average scores for each subset. We observe consistent drop in model performance across all subsets when transitioning from the standard MMLU dataset to the more challenging MMLU-SR dataset, as evidenced by the decline in average accuracy from 0.677 on the MMLU dataset to 0.616, 0.520, and 0.459, on our MMLU-SR’s “Question Only”, “Answer Only”, and “Question and Answer” subsets, respectively, for the gpt-3.5-turbo model. This trend of decreased performance is similarly observed in the other models.

We observe a crucial trend in decreasing accuracy across datasets: The “Question Only” dataset experiences the least drop, followed by the “Answer Only” dataset, with the most significant decline occurring in the “Question and Answer” dataset. This trend can be primarily attributed to two major reasons: (1) When only the question is modified, the model retains the original answer choices, facilitating the inference of the modified question’s meaning; in contrast, altering the answer choices removes this contextual aid, challenging the model’s ability to correctly match the question

Table 2: Relative percentage drop of accuracy in MMLU-SR compared to MMLU.

Model	Humanities	Social Sciences	STEM	Other	Average
GPT-3.5-turbo					
Question Only (5-shot)	8.58%	8.83%	8.67%	10.22%	9.08%
Answer Only (5-shot)	25.31%	22.73%	20.40%	24.65%	23.27%
Question and Answer (5-shot)	35.12%	32.08%	28.52%	33.30%	32.26%
Gemini-1.0-pro					
Question Only (5-shot)	5.63%	1.85%	9.56%	6.40%	5.86%
Answer Only (5-shot)	14.96%	11.61%	15.44%	15.91%	14.48%
Question and Answer (5-shot)	20.05%	17.94%	20.81%	22.60%	20.85%
Llama3-8B					
Question Only (5-shot)	7.92%	9.51%	8.98%	8.36%	8.69%
Answer Only (5-shot)	23.27%	20.87%	17.41%	23.56%	21.28%
Question and Answer (5-shot)	28.16%	28.93%	23.88%	31.56%	28.63%

with the appropriate answer. (2) Answer choices are typically more concise and therefore lack the extensive context found in questions; consequently, replacing terms in the answers not only introduces ambiguity but also demands more complex inferential reasoning, disrupting the model’s learned pattern-recognition strategies and resulting in a greater accuracy drop. The observations above also *justify the design of our MMLU-SR* on three variants (i.e., “Question Only”, “Answer Only”, and “Question and Answer”).

Accuracy Drop in Each Category. Table 2 shows several aspects in the relative percentage drop of accuracy in MMLU-SR compared to that in MMLU across different categories for `gpt-3.5-turbo`, `gemini-1.0-pro`, and `llama3-8b`:

- Humanities and Social Sciences.** For `gpt-3.5-turbo`, the accuracy drops significantly in the Humanities category, with a slightly lower drop in Social Sciences. The `gemini-1.0-pro` model demonstrates notable resilience in the Social Science category within the “Question Only” dataset, exhibiting only a minimal performance decrease. In contrast, there are moderate drops in MMLU-SR’s “Answer Only” and “Question and Answer” datasets. Despite these decreases, `gemini-1.0-pro` still shows the smallest performance decline in the Humanities and Social Science categories compared to the other two models evaluated. `llama3-8b` exhibits a similar pattern to `gpt-3.5-turbo`, with the Humanities and Social Sciences categories showing a moderate percentage drop, though slightly lower than `gpt-3.5-turbo` in the “Question and Answer” dataset.
- STEM.** For both `gemini-1.0-pro` and `llama3-8b`, the STEM category shows the least decrease in accuracy across the MMLU-SR datasets. This indicates that these models maintain their performance better in STEM subjects compared to other categories when faced with symbol replacement. However, `gpt-3.5-turbo` does not follow this trend and instead shows a more significant drop in the STEM category, especially in the “Answer Only” and “Question and Answer” datasets. This suggests that `gpt-3.5-turbo` may be less robust and more sensitive to modifications in the STEM domain.
- Other.** The Other category generally shows a significant drop across all models and datasets, with the highest drops often observed in the “Question and Answer” dataset. This suggests that questions in this category might be more context-dependent and thus more affected by symbol replacement.

Detailed Accuracy Drop in Each Subject. Table 3 shows a detailed comparison of accuracy scores across different models evaluated on various subjects in the Humanities category. The MMLU scores serve as a baseline for comparison. Generally, `gemini-1.0-pro` performs best across most subjects in this category, closely followed by `gpt-3.5-turbo` and then `llama3-8b`. All models achieve relatively high accuracy scores in Humanities, with performance generally around 0.6 to 0.7 for most subjects. However, all models seem to struggle with solving problems in Moral Scenarios, where the accuracy score is strikingly lower, around 0.2 to 0.3, very close to the random baseline of 0.25.

Table 3: Detailed accuracy for different Humanities subjects across different models.

Subject	MMLU			Question Only			Answer Only			Question and Answer		
	GPT	Gemini	Llama3	GPT	Gemini	Llama3	GPT	Gemini	Llama3	GPT	Gemini	Llama3
Formal Logic	0.492	0.437	0.476	0.413	0.373	0.413	0.381	0.413	0.413	0.310	0.381	0.310
Logical Fallacies	0.767	0.816	0.730	0.724	0.761	0.712	0.650	0.736	0.601	0.589	0.663	0.472
Moral Disputes	0.769	0.740	0.740	0.688	0.697	0.645	0.569	0.645	0.584	0.442	0.604	0.552
Moral Scenarios	0.342	0.278	0.403	0.280	0.400	0.336	0.245	0.210	0.246	0.255	0.242	0.244
Philosophy	0.768	0.759	0.736	0.666	0.656	0.601	0.450	0.521	0.524	0.357	0.492	0.441
World Religions	0.860	0.848	0.836	0.819	0.801	0.819	0.643	0.690	0.667	0.608	0.655	0.608
High School European History	0.800	0.806	0.782	0.764	0.788	0.764	0.612	0.739	0.667	0.545	0.709	0.636
High School Us History	0.858	0.848	0.848	0.833	0.799	0.760	0.730	0.730	0.637	0.623	0.711	0.588
High School World History	0.844	0.882	0.827	0.802	0.852	0.772	0.620	0.768	0.667	0.557	0.747	0.612
Prehistory	0.738	0.815	0.722	0.682	0.747	0.679	0.549	0.664	0.586	0.469	0.614	0.528
International Law	0.843	0.835	0.851	0.777	0.802	0.826	0.628	0.802	0.736	0.595	0.769	0.653
Jurisprudence	0.806	0.843	0.769	0.676	0.731	0.731	0.556	0.667	0.593	0.417	0.556	0.417
Professional Law	0.512	0.557	0.460	0.471	0.528	0.449	0.391	0.464	0.360	0.334	0.430	0.358

Table 4: Detailed accuracy for different Social Science subjects across different models.

Subject	MMLU			Question Only			Answer Only			Question and Answer		
	GPT	Gemini	Llama3	GPT	Gemini	Llama3	GPT	Gemini	Llama3	GPT	Gemini	Llama3
Econometrics	0.535	0.579	0.500	0.465	0.482	0.430	0.395	0.439	0.342	0.395	0.386	0.316
High School Macroeconomics	0.651	0.738	0.636	0.608	0.654	0.592	0.464	0.569	0.503	0.379	0.477	0.433
High School Microeconomics	0.769	0.815	0.723	0.660	0.739	0.597	0.508	0.668	0.542	0.429	0.559	0.462
High School Government And Politics	0.912	0.943	0.891	0.845	0.881	0.850	0.674	0.751	0.710	0.591	0.720	0.642
Public Relations	0.700	0.718	0.709	0.664	0.645	0.664	0.618	0.600	0.636	0.555	0.536	0.536
Security Studies	0.698	0.808	0.735	0.645	0.780	0.678	0.539	0.678	0.624	0.510	0.657	0.600
Us Foreign Policy	0.860	0.890	0.870	0.780	0.840	0.860	0.600	0.720	0.720	0.610	0.720	0.690
Human Sexuality	0.817	0.260	0.779	0.763	0.740	0.695	0.649	0.687	0.649	0.542	0.687	0.611
Sociology	0.846	0.866	0.866	0.796	0.851	0.816	0.746	0.821	0.806	0.632	0.766	0.706
High School Geography	0.864	0.859	0.813	0.763	0.813	0.763	0.697	0.712	0.596	0.581	0.662	0.576
High School Psychology	0.862	0.879	0.831	0.802	0.820	0.771	0.705	0.760	0.670	0.602	0.706	0.596
Professional Psychology	0.722	0.737	0.725	0.637	0.683	0.608	0.546	0.634	0.518	0.456	0.592	0.459

Table 4 shows a detailed comparison of accuracy across different models evaluated on various subjects in the Social Science category. We observe that all models perform well in Social Science on MMLU, particularly in High School Government and Politics, where the accuracy is around 0.9. However, there is a notable drop in accuracy from MMLU to MMLU-SR’s “Question and Answer” dataset, with accuracy dropping from 0.9 to 0.6~0.7. This significant drop exemplifies how our symbol replacement method increases the difficulty, effectively stress-testing whether the models are truly performing reasoning rather than merely memorizing pre-trained terms.

Table 5 shows a detailed comparison of accuracy across various STEM subjects for different models. Each model demonstrated varying degrees of success across the subjects, with notable difficulties in some areas. Particularly, the subject with the lowest accuracies among all models is College Mathematics, where the accuracy is consistently around 0.3 in MMLU-SR’s “Question and Answer” dataset, reflecting the challenges in solving math problems. High School Mathematics also shows similar trends, highlighting the models’ struggles with subjects involving extensive calculations and problem-solving.

Table 6 shows a detailed comparison of accuracy scores across different models evaluated on various subjects in the Other category. We observe that all models perform well in MMLU, with accuracy around 0.7 to 0.8 in most subjects. Marketing stands out with a particularly high accuracy of about 0.9, while Professional Accounting and Virology show lower accuracy around 0.5. We observe a significant drop in accuracy from MMLU to MMLU-SR’s “Question and Answer” dataset, with accuracy decreasing to around 0.4~0.6.

CoT and System Instruction. We developed a simple baseline to test our MMLU-SR dataset on more recent and sophisticated models like GPT-4. This involves adding the instruction “Let’s think step by step” at the end of answer choices to enable zero-shot CoT prompting. As shown in Table 7 from Appendix A, we also included a system instruction informing ChatGPT-4 that the following questions would involve symbol replacement with arbitrary definitions. However, the example demonstrates that despite applying (zero-shot) CoT, the model still incorrectly interprets the term ‘Dummy’ in choice D as ‘neurodegenerative disorder,’ leading to the wrong answer, choice A. We applied this system instruction across the entire MMLU-SR dataset as well, with results shown in

Table 5: Detailed accuracy for different STEM subjects across different models.

Subject	MMLU			Question Only			Answer Only			Question and Answer		
	GPT	Gemini	Llama3	GPT	Gemini	Llama3	GPT	Gemini	Llama3	GPT	Gemini	Llama3
Abstract Algebra	0.420	0.360	0.310	0.320	0.340	0.300	0.380	0.340	0.310	0.360	0.390	0.320
College Mathematics	0.250	0.430	0.350	0.260	0.350	0.350	0.180	0.340	0.380	0.270	0.340	0.340
High School Statistics	0.537	0.625	0.537	0.421	0.537	0.477	0.394	0.481	0.440	0.352	0.435	0.417
Elementary Mathematics	0.484	0.463	0.423	0.452	0.410	0.368	0.463	0.460	0.392	0.431	0.392	0.347
High School Mathematics	0.289	0.426	0.404	0.300	0.381	0.359	0.344	0.381	0.415	0.319	0.344	0.370
Astronomy	0.770	0.822	0.697	0.671	0.770	0.625	0.579	0.645	0.579	0.500	0.645	0.539
College Physics	0.461	0.412	0.461	0.373	0.412	0.333	0.373	0.333	0.373	0.324	0.324	0.333
Conceptual Physics	0.694	0.672	0.579	0.532	0.600	0.506	0.464	0.532	0.383	0.319	0.426	0.332
High School Physics	0.377	0.464	0.444	0.391	0.371	0.384	0.258	0.331	0.305	0.291	0.298	0.291
College Chemistry	0.470	0.470	0.460	0.450	0.490	0.400	0.400	0.420	0.400	0.410	0.370	0.380
High School Chemistry	0.527	0.537	0.527	0.473	0.512	0.502	0.409	0.517	0.463	0.325	0.429	0.429
College Biology	0.792	0.854	0.771	0.715	0.778	0.736	0.542	0.701	0.625	0.403	0.653	0.562
High School Biology	0.813	0.845	0.771	0.755	0.823	0.710	0.606	0.700	0.639	0.542	0.703	0.577
College Computer Science	0.560	0.590	0.490	0.510	0.490	0.460	0.450	0.530	0.340	0.470	0.450	0.400
Computer Security	0.800	0.790	0.800	0.770	0.760	0.780	0.550	0.660	0.680	0.520	0.710	0.650
High School Computer Science	0.710	0.740	0.680	0.730	0.710	0.620	0.660	0.700	0.610	0.600	0.650	0.580
Machine Learning	0.411	0.509	0.527	0.411	0.384	0.527	0.438	0.473	0.402	0.312	0.482	0.330
Electrical Engineering	0.614	0.717	0.648	0.579	0.586	0.628	0.448	0.531	0.483	0.379	0.462	0.483

Table 6: Detailed accuracy for different Other subjects across different models.

Subject	MMLU			Question Only			Answer Only			Question and Answer		
	GPT	Gemini	Llama3	GPT	Gemini	Llama3	GPT	Gemini	Llama3	GPT	Gemini	Llama3
Anatomy	0.674	0.667	0.711	0.556	0.644	0.615	0.519	0.504	0.467	0.481	0.437	0.430
Clinical Knowledge	0.758	0.762	0.766	0.694	0.706	0.649	0.608	0.615	0.574	0.543	0.551	0.521
College Medicine	0.699	0.665	0.642	0.624	0.688	0.566	0.532	0.572	0.590	0.497	0.572	0.486
Human Aging	0.726	0.753	0.717	0.583	0.632	0.610	0.457	0.614	0.462	0.363	0.561	0.336
Medical Genetics	0.790	0.790	0.780	0.680	0.730	0.730	0.580	0.630	0.640	0.520	0.580	0.570
Nutrition	0.765	0.761	0.765	0.693	0.729	0.712	0.516	0.641	0.631	0.428	0.598	0.582
Professional Medicine	0.776	0.713	0.717	0.706	0.647	0.643	0.551	0.603	0.585	0.467	0.540	0.507
Virology	0.524	0.548	0.560	0.428	0.464	0.476	0.398	0.518	0.452	0.349	0.500	0.380
Business Ethics	0.740	0.680	0.610	0.610	0.640	0.620	0.540	0.540	0.520	0.470	0.530	0.490
Management	0.816	0.835	0.883	0.796	0.786	0.845	0.650	0.728	0.718	0.583	0.641	0.631
Marketing	0.910	0.889	0.893	0.872	0.855	0.833	0.722	0.739	0.645	0.654	0.714	0.598
Global Facts	0.440	0.420	0.350	0.390	0.380	0.360	0.380	0.460	0.350	0.290	0.310	0.370
Miscellaneous	0.884	0.835	0.837	0.840	0.803	0.775	0.709	0.670	0.599	0.614	0.644	0.539
Professional Accounting	0.489	0.521	0.496	0.496	0.504	0.486	0.365	0.440	0.362	0.397	0.440	0.369

Table 11 from Appendix C. The results indicate that while the system instruction slightly improves accuracy in the “Question Only” and “Answer Only” datasets, the model still struggles with the increased complexity in the “Question and Answer” dataset.

5 Discussion

5.1 Limitation

While MMLU-SR provides a novel approach to evaluate language models by incorporating symbol replacement, it has two major limitations: Firstly, some questions and answers remain unchanged without symbol replacement, especially in cases involving straightforward mathematical numbers or simple question forms. While these unchanged elements should not introduce significant noise, their presence might affect the intended complexity and variability of the evaluation. Secondly, MMLU-SR only involves multiple-choice questions, limiting its utility in assessing models’ capabilities in generative tasks. This restriction could hinder comprehensive evaluations of a model’s ability to generate coherent and contextually appropriate responses beyond structured choices. As the field progresses, expanding MMLU-SR to include generative components could provide a more holistic assessment of language models.

5.2 Future Work

For future work, it would be interesting to enhance MMLU-SR by creating more structured and domain-specific evaluations. One approach is to develop a pilot exam-style dataset, where a set of

questions refers to a single chart or diagram, allowing us to study the model’s understanding within specific contexts more deeply. Additionally, it would also be interesting to introduce a “Hard” version of MMLU-SR by replacing terms with their synonyms or antonyms as dummy words. An example is shown in Table 12 from Appendix D. This will challenge the models’ domain understanding and ability to discern subtle differences in meaning, thereby providing a more rigorous evaluation of their reasoning capabilities. Furthermore, one could also modify our development dataset for each subset by integrating CoT prompts, enabling MMLU-SR to test whether 5-shot CoT improves the evaluation scores in larger-scale models, rather than simply performing zero-shot CoT using ChatGPT-4.

5.3 Conclusion

We introduced MMLU-SR, a novel benchmark that challenges LLMs by replacing key terms in questions with random words followed by their definitions, aiming to test the models’ reasoning and comprehension abilities rather than their memorization skills. Our evaluation across multiple domains revealed that popular LLMs suffer from significant drops in performance with these modifications, highlighting their reliance on memorized terms. MMLU-SR’s unique approach addresses concerns about overfitting to traditional benchmarks and provides a more rigorous measure of true language understanding. This dataset will enable researchers to better identify and address the reasoning limitations of current LLMs, fostering the development of more robust and genuinely intelligent models.

References

- [1] S. N. Akter, Z. Yu, A. Muhamed, T. Ou, A. Bäuerle, Á. A. Cabrera, K. Dholakia, C. Xiong, and G. Neubig. An in-depth look at gemini’s language abilities. *arXiv preprint arXiv:2312.11444*, 2023.
- [2] Ali Borji. Objectnet dataset: Reanalysis and correction, 2020.
- [3] Mark Chen et al. Evaluating large language models trained on code, 2021.
- [4] Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. Boolq: Exploring the surprising difficulty of natural yes/no questions, 2019.
- [5] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *ArXiv*, abs/1803.05457, 2018.
- [6] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems, 2021.
- [7] Dheeru Dua, Yizhong Wang, Pradeep Dasigi, Gabriel Stanovsky, Sameer Singh, and Matt Gardner. Drop: A reading comprehension benchmark requiring discrete reasoning over paragraphs, 2019.
- [8] Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muennighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. A framework for few-shot language model evaluation, 12 2023.
- [9] D. Gentner and J. Medina. Similarity and the development of rules. *Cognition*, 65(2/3):263–297, 1998.
- [10] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. In *Proceedings of the International Conference on Learning Representations (ICLR)*, 2021.
- [11] H. Li, Y. Zhang, F. Koto, Y. Yang, H. Zhao, Y. Gong, N. Duan, and T. Baldwin. Cmmlu: Measuring massive multitask language understanding in chinese. *arXiv preprint arXiv:2306.09212*, 2024.

- [12] Y. Oren, N. Meister, N. Chatterji, F. Ladhak, and T. B. Hashimoto. Proving test set contamination in black box language models. *arXiv preprint arXiv:2310.17623*, 2023.
- [13] Shuai Lu others. Codexglue: A machine learning benchmark dataset for code understanding and generation. *CoRR*, abs/2102.04664, 2021.
- [14] D. C. Penn, K. J. Holyoak, and D. J. Povinelli. Darwin’s mistake: explaining the discontinuity between human and nonhuman minds. *Behavioral and Brain Sciences*, 31(2):109–130, 2008.
- [15] Z.-R. Tam, Y.-T. Pai, Y.-W. Lee, S. Cheng, and H.-H. Shuai. An improved traditional chinese evaluation suite for foundation model. *arXiv preprint arXiv:2403.01858*, 2024.
- [16] Harsh Trivedi, Niranjan Balasubramanian, Tushar Khot, and Ashish Sabharwal. Interleaving retrieval with chain-of-thought reasoning for knowledge-intensive multi-step questions, 2023.
- [17] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. Glue: A multi-task benchmark and analysis platform for natural language understanding, 2019.
- [18] J. Wei, X. Wang, D. Schuurmans, M. Bosma, B. Ichter, F. Xia, E. Chi, Q. Le, and D. Zhou. Chain-of-thought prompting elicits reasoning in large language models. *arXiv preprint arXiv:2201.11903*, 2023.
- [19] Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models, 2023.
- [20] Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence?, 2019.
- [21] Zhuosheng Zhang, Aston Zhang, Mu Li, and Alex Smola. Automatic chain of thought prompting in large language models. In *The Eleventh International Conference on Learning Representations (ICLR 2023)*, 2023.
- [22] Wanjun Zhong, Ruixiang Cui, Yiduo Guo, Yaobo Liang, Shuai Lu, Yanlin Wang, Amin Saied, Weizhu Chen, and Nan Duan. Agieval: A human-centric benchmark for evaluating foundation models, 2023.

A CoT Examples

Table 7 shows an example of incorrect answer using zero-shot CoT with a system instruction produced by the ChatGPT-4 on MMLU-SR’s “Question and Answer” dataset. The correct answer is choice D, but ChatGPT-4 responded with choice A.

B Examples of ChatGPT-3.5 Response

Table 8 shows an example of incorrect answer produced by the ChatGPT-3.5 on MMLU-SR’s “Question and Answer” dataset. Table 9 shows an example of incorrect answer produced by the ChatGPT-3.5 on MMLU-SR’s “Question and Answer” dataset. Table 10 shows an example of incorrect answer produced by the ChatGPT-3.5 on MMLU-SR’s “Question and Answer” dataset.

C System Instruction Example

Table 11 shows the performance comparison of `gemin-1.0-pro` with and without using the system instruction “In each of the questions that I ask, I will replace some of the words that you might know with a word that is arbitrarily assigned a specific meaning just for this test. The meaning of these arbitrary definition may change with every question.”

Table 7: Example of incorrect output using zero-shot CoT with system instruction.

System Prompt	In each of the questions that I ask, I will replace some of the words that you might know with a word that is arbitrarily assigned a specific meaning just for this test. The meaning of these arbitrary definition may change with every question.
Input	<p>Suppose ‘Hat’ means ‘the name given to any laboratory technique that measures enzyme activity within a sample.’ Hat can be used to identify carriers of:</p> <p>A. Suppose ‘Bard’ means ‘An inherited disorder that affects the lungs, digestive system, and other organs, characterized by the production of thick, sticky mucus.’ Bard.</p> <p>B. Suppose ‘Jump’ means ‘A genetic condition causing intellectual disability, behavioral challenges, and certain physical characteristics, resulting from a mutation in the FMR1 gene.’ Jump.</p> <p>C. Suppose ‘Zelly’ means ‘A group of inherited disorders characterized by a lack of melanin production in the skin, hair, and eyes, leading to light pigmentation.’ Zelly.</p> <p>D. Suppose ‘Dummy’ means ‘A rare genetic disorder that causes progressive destruction of nerve cells in the brain and spinal cord, leading to severe neurological symptoms.’ Dummy.</p> <p>Let’s think step by step.</p>
Output	<p>In this scenario, Hat is used to detect variations or abnormalities in enzyme levels that might be indicative of certain genetic disorders.</p> <p>A: Bard refers to cystic fibrosis. Areas of land (Jack) often have boundaries (Winky) that separate them from other areas.</p> <p>B: Jump refers to Fragile X syndrome, primarily involves genetic testing to detect the specific mutation rather than enzyme activity measurements.</p> <p>C: Zelly refers to conditions such as albinism, which are typically diagnosed based on pigment absence rather than enzyme activity, although some biochemical tests can be relevant in specific contexts.</p> <p>D: Dummy could be referring to several neurodegenerative disorders, which might be associated with enzyme activities related to nerve cell function or metabolic processes, but generally, such disorders are diagnosed through genetic markers and neuroimaging rather than enzyme activity alone.</p> <p>Given these explanations, the best match for ‘Hat’ in terms of being a technique to measure enzyme activity useful for diagnosis would be A, ‘Bard’ as cystic fibrosis, due to its direct relationship with enzyme dysfunction and measurement. ✗</p>

D Hard MMLU-SR Example

Table 12 illustrates a challenging example mentioned in the “Question and Answer” section in the main paper. In the question, we substituted “enzyme assay” with a synonym, “protein”, and used the original terms from the MMLU dataset as placeholders in the answer choices, each paired with a definition. ChatGPT-4 correctly identified the term “Tay-Sachs Disease” but associated it with the incorrect answer choice and definition, which was meant for “Fragile X syndrome.” This example demonstrates that ChatGPT-4 can be misled by the complexity of the dataset, tending to rely on pre-existing knowledge rather than engaging in substantive reasoning to align terms with their definitions.

Table 8: Example of incorrect response generated by ChatGPT-3.5 in “Question Only” dataset.

Input	<p>Suppose ‘Hat’ means “the name given to any laboratory technique that measures enzyme activity within a sample.” Hat can be used to identify carriers of:</p> <p>A. Cystic fibrosis.</p> <p>B. Fragile X syndrome.</p> <p>C. Oculocutaneous albinism.</p> <p>D. Tay-Sachs disease</p>
Output	<p>“Hat” in this context refers to an enzyme assay technique rather than a genetic condition or disease. Therefore, it wouldn’t be used to identify carriers of genetic disorders like cystic fibrosis, Fragile X syndrome, oculocutaneous albinism, or Tay-Sachs disease. It’s essential to keep in mind the specific context in which terms are used in scientific fields! ✗</p>

Table 9: Example of incorrect response generated by ChatGPT-3.5 in “Answer Only” dataset.

Input	<p>Enzyme assay can be used to identify carriers of:</p> <p>A. Suppose ‘Bard’ means ‘An inherited disorder that affects the lungs, digestive system, and other organs, characterized by the production of thick, sticky mucus.’ Bard.</p> <p>B. Suppose ‘Jump’ means ‘A genetic condition causing intellectual disability, behavioral challenges, and certain physical characteristics, resulting from a mutation in the FMR1 gene.’ Jump.</p> <p>C. Suppose ‘Zelly’ means ‘A group of inherited disorders characterized by a lack of melanin production in the skin, hair, and eyes, leading to light pigmentation.’ Zelly.</p> <p>D. Suppose ‘Dummy’ means ‘A rare genetic disorder that causes progressive destruction of nerve cells in the brain and spinal cord, leading to severe neurological symptoms.’ Dummy.</p>
Output	<p>An enzyme assay could be used to identify carriers of Bard, Jump, Zelly, or Dummy if the specific enzyme associated with each disorder is known and can be tested for. Enzyme assays are commonly used in genetic testing to detect the presence or absence of specific enzymes or their activity levels, which can provide information about an individual’s genetic makeup and potential carrier status for certain genetic disorders. ✗</p>

Table 10: Example of incorrect response generated by ChatGPT-3.5 in “Question and Answer” dataset.

Input	<p>Suppose 'Hat' means “the name given to any laboratory technique that measures enzyme activity within a sample.” Hat can be used to identify carriers of</p> <p>A. Suppose 'Bard' means ‘An inherited disorder that affects the lungs, digestive system, and other organs, characterized by the production of thick, sticky mucus.’ Bard.</p> <p>B. Suppose 'Jump' means ‘A genetic condition causing intellectual disability, behavioral challenges, and certain physical characteristics, resulting from a mutation in the FMR1 gene.’ Jump.</p> <p>C. Suppose 'Zelly' means ‘A group of inherited disorders characterized by a lack of melanin production in the skin, hair, and eyes, leading to light pigmentation.’ Zelly.</p> <p>D. Suppose 'Dummy' means ‘A rare genetic disorder that causes progressive destruction of nerve cells in the brain and spinal cord, leading to severe neurological symptoms.’ Dummy.</p>
Output	<p>Based on the provided definitions:</p> <p>A. Hat (enzyme activity measurement) can be used to identify carriers of Zelly (lack of melanin production disorders).</p> <p>Explanation: Enzyme activity measurements are often used in medical diagnostics to identify various conditions, including genetic disorders. In this case, the lack of melanin production, as seen in Zelly disorders, can be identified using enzyme activity tests. ✗</p>

Table 11: Performance comparison of the gemini-1.0-pro model with and without the system instruction.

Model	Humanities	Social Sciences	STEM	Other	Average
Gemini-1.0-pro					
Question Only (5-shot)	0.687	0.744	0.539	0.658	0.645
Answer Only (5-shot)	0.619	0.670	0.504	0.591	0.586
Question and Answer (5-shot)	0.582	0.622	0.472	0.544	0.546
Gemini-1.0-pro with System Instruction					
Question Only	0.688	0.735	0.535	0.650	0.652
Answer Only	0.619	0.661	0.502	0.576	0.590
Question and Answer	0.570	0.612	0.460	0.537	0.545

Table 12: Example of a hard version of MMLU-SR.

Input	<p>Suppose ‘Protein’ means ‘the name given to any laboratory technique that measures enzyme activity within a sample.’ Protein can be used to identify carriers of:</p> <p>A. Suppose ‘Oculocutaneous albinism’ means ‘An inherited disorder that affects the lungs, digestive system, and other organs, characterized by the production of thick, sticky mucus.’ Oculocutaneous albinism.</p> <p>B. Suppose ‘Tay-Sachs disease’ means ‘A genetic condition causing intellectual disability, behavioral challenges, and certain physical characteristics, resulting from a mutation in the FMR1 gene.’ Tay-Sachs disease.</p> <p>C. Suppose ‘Cystic fibrosis’ means ‘A group of inherited disorders characterized by a lack of melanin production in the skin, hair, and eyes, leading to light pigmentation.’ Cystic fibrosis.</p> <p>D. Suppose ‘Fragile X syndrome’ means ‘A rare genetic disorder that causes progressive destruction of nerve cells in the brain and spinal cord, leading to severe neurological symptoms.’ Fragile X syndrome.</p>
Output	<p>The given problem seems to involve identifying which condition might be detected through a laboratory technique measuring enzyme activity. From the provided definitions, none of the conditions directly indicate an enzyme-related pathology except for a possible misalignment in the definitions and names:</p> <p>A: Oculocutaneous albinism is defined incorrectly and does not relate to the production of enzymes.</p> <p>B: Tay-Sachs disease is a genetic disorder characterized by the destruction of nerve cells in the brain due to a deficiency of a specific enzyme (Hexosaminidase A). This is actually a plausible answer if we correct the name to Tay-Sachs disease, which fits the description of a disease involving enzyme activity.</p> <p>C: Cystic fibrosis and D: Fragile X syndrome are misdefined and do not relate to conditions involving measurable enzyme activity relevant to their actual conditions.</p> <p>Thus, the most likely answer, B. Tay-Sachs disease (with the corrected definition and name). ✗</p>