

PAFT: A Parallel Training Paradigm for Effective LLM Fine-Tuning

Shiva Kumar Pentyala*, Zhichao Wang*, Bin Bi*, Kiran Ramnath,
Xiang-Bo Mao, Regunathan Radhakrishnan, Sitaram Asur, Na (Claire) Cheng
Salesforce

{shivakumar.pentyala, zhichaowang, bin.bi, k.ramnath,
xmao, rradhakrishnan, sasur, claire.cheng}@salesforce.com

Abstract

Large language models (LLMs) have shown remarkable abilities in diverse natural language processing (NLP) tasks. The LLMs generally undergo supervised fine-tuning (SFT) followed by preference alignment to be usable in downstream applications. However, this sequential training pipeline leads to alignment tax that degrades the LLM performance.

This paper introduces PAFT, a new **PAR**allel training paradigm for effective LLM **F**ine-**T**uning, which independently performs SFT and preference alignment (e.g., DPO and ORPO, etc.) with the same pre-trained model on respective datasets. The model produced by SFT and the model from preference alignment are then merged into a final model by parameter fusing for use in downstream applications. This work reveals important findings that preference alignment like DPO naturally results in a sparse model while SFT leads to a natural dense model which needs to be sparsified for effective model merging. This paper introduces an effective interference resolution which reduces the redundancy by sparsifying the delta parameters. The LLM resulted from the new training paradigm achieved Rank #1 on the HuggingFace Open LLM Leaderboard¹. Comprehensive evaluation shows the effectiveness of the parallel training paradigm.

1 Introduction

In recent years, large language models (LLMs) have emerged as the standard approach to addressing natural language processing (NLP) tasks. The typical way of building an LLM for downstream applications generally follows a sequential training pipeline consisting of two phases: 1. Supervised Fine-tuning (SFT), where the pre-trained LLM is fine-tuned with the language modelling loss on

demonstrations of the desired behaviour. 2. Alignment with human preference, where the model produced by the SFT phase is further fine-tuned with an alignment algorithm like Reinforcement Learning from Human Feedback (RLHF) or Direct Preference Optimization (DPO), etc. While this sequential pipeline has been used to seemingly great success, how the SFT and the preference alignment work better with each other is underexplored.

Recent studies (OpenAI, 2023; Askell et al., 2021; Song et al., 2023) have found that the preference alignment phase can cause the LLM to forget the diverse capabilities that it has acquired from earlier phases, despite aligning the LLM with human expectation. This phenomenon, also known as the *alignment tax* in the literature (Ouyang et al., 2022), has accumulated substantial attention from both academia and industry. The alignment tax inherently results from catastrophic forgetting present in the staged training. To reduce catastrophic forgetting and thus alignment tax, this paper introduces a new parallel training paradigm for LLM fine-tuning, named PAFT, which independently performs SFT and preference alignment with the same pre-trained model on respective datasets, instead of sequentially conducting SFT followed by preference alignment. The model from SFT and the model from preference alignment are then merged into a final model by parameter fusing for use in downstream applications.

As discovered by prior work (Yadav et al., 2023; Yu et al., 2023), direct model merging causes the parameter values to interfere across models, thereby harming the performance of the final model. The interference, which reduces parameter magnitudes in the merged model and eliminates subtle distinctions among values, can attribute to the redundant *delta parameters*, i.e., the differences in values between fine-tuned and pre-trained parameters, resulted from fine-tuning. Previous studies on model pruning (Hoefer et al., 2021; Thimm and Fiesler,

*These authors contributed equally to this work

¹https://huggingface.co/spaces/HuggingFaceH4/open_llm_leaderboard

1995) have shown that during fine-tuning, many model parameters can change over the course of fine-tuning but only have a small impact on performance. However, when merging a parameter that is influential for one model but redundant (i.e. not influential) for other models, the influential value may be obscured by the redundant values, lowering the overall model performance. This work reveals the dense properties of the delta parameters resulted from SFT. To mitigate the dense property of SFT, we propose an effective interference resolution which reduces the redundancy by sparsifying the delta parameters by adding a L1-norm penalty to the original SFT loss function. The existing findings indicate that the inclusion of the L1 term enhances the sparsity of the SFT. This method of implicitly inducing sparsity has been evaluated against a technique that introduces sparsity explicitly, i.e., DARE (Yu et al., 2023), demonstrating the advantages of employing the L1-norm on LLM’s performances in downstream tasks.

Finally, the sparse delta parameters from SFT and preference alignment are merged into a single stronger model. Different merging methods are assessed, and TIES and Task Arithmetic are shown to be the best model merging methods, depending on base models. The method of Parallel SFT_{sparse}+DPO merged through TIES based on Mistral-7B sets a new benchmark for 7B models, i.e., 0.6524 on average over the six tasks in HuggingFace Open LLM Leaderboard. Notably, Parallel SFT_{sparse}+DPO consistently outperforms Parallel SFT+DPO across all model merging methods, showing the effectiveness and robustness of the PAFT training paradigm.

The contributions of this paper are threefold:

1. Evidence is presented that parallel training of SFT and preference alignment outperforms sequential training, effectively reducing the alignment tax.
2. The significance of sparse model integration is highlighted as a mean to prevent model conflict while preserving the full capability of each model. We demonstrate the superiority of the L1-norm over DARE as a more effective and higher-quality method for promoting sparsity in model training across various model merging techniques.
3. We conduct comprehensive evaluation of PAFT on well-known public benchmarks in-

cluding Open LLM Leaderboard and AlpacaEval. The PAFT-ed 7B model achieved Rank #1 in the 7B/8B model category on the Open LLM Leaderboard, and the PAFT-ed 70B model topped the Leaderboard globally.

2 Methodology

2.1 Problem Setting

Given a pre-trained LLM, such as Mistral and Llama, we aim to optimize the model for a wide range of downstream tasks by fine-tuning it either fully or with parameter-efficient tuning such as LoRA (Hu et al., 2022), using SFT and preference alignment. Throughout this paper, θ denotes the trainable parameters; θ_{pre} denotes the parameters of the pre-trained model; θ_{sft} denotes the parameters of the model fine-tuned with SFT; θ_{xpo} denotes the parameters of the model fine-tuned with preference alignment, such as PPO (Schulman et al., 2017; Ziegler et al., 2020), DPO (Rafailov et al., 2023) and ORPO (Hong et al., 2024), etc.; $\delta_{\text{sft}} = \theta_{\text{sft}} - \theta_{\text{pre}}$ denotes the delta parameters between the SFT-ed model and the pre-trained model; and $\delta_{\text{xpo}} = \theta_{\text{xpo}} - \theta_{\text{pre}}$ denotes the delta parameters between the preference-aligned model and the pre-trained model.

2.2 Parallel Training

SFT and preference alignment are two distinct methodologies designed to enhance the capabilities of pre-trained LLMs for specific applications. SFT focuses on boosting the performance of LLMs on downstream tasks by fine-tuning them with datasets that closely resemble the target task. This process tailors the model’s responses to be more accurate and relevant for a specific use-case. In contrast, preference alignment, such as RLHF, DPO and ORPO, etc., is a methodology that refines a model’s outputs based on human preferences. It generally fine-tunes the model on pairs of responses to an input query, one of which is preferred over the other one. Preference alignment uses such feedback signal to guide the model towards generating outputs that align with human expectation and ethical standards. This approach is particularly valuable for addressing the ethical considerations that arise when deploying LLMs in real-world scenarios.

Nowadays, researchers have applied SFT to enhance the performance of LLMs on targeted tasks, and then employed preference alignment to further

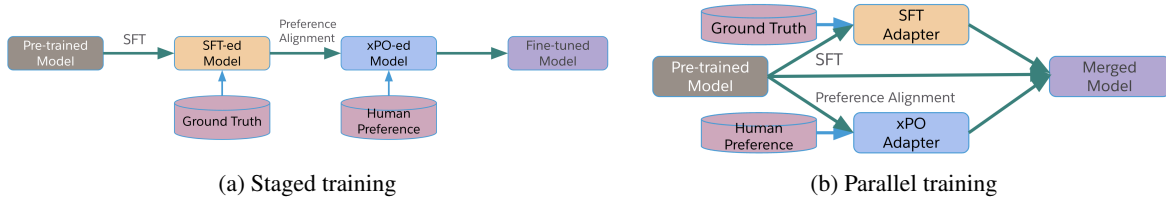


Figure 1: Comparison of training paradigms

align the models with human preferences. However, this sequential application of SFT followed by preference alignment has often led to a compromise in task-specific performance - a phenomenon referred to as the alignment tax. This occurs because the distinct objectives of SFT and preference alignment can sometimes be at odds, with the alignment process potentially undoing some of the task-specific optimizations achieved through SFT.

We address the challenge of the alignment tax by a novel approach that involves SFT and preference alignment concurrently using adapter training, such as LoRA (Hu et al., 2022). This method takes full advantages and strengths of both SFT and preference alignment without sacrificing performance in either one, i.e., ensuring that the resulting model maintains high performance in downstream tasks while also being aligned with human preferences, thus overcoming the limitations associated with the alignment tax. During the training process specifically, based on the same pre-trained model θ_{pre} , the two separate adapter parameters, denoted as δ_{sft} and δ_{xpo} , are learned in parallel from downstream ground truth and human preferences, respectively. The proposed PAFT seeks to merge the δ_{sft} and δ_{xpo} in an effective way of avoiding feature interference. Figure 1 compares the typical staged training pipeline and our parallel training pipeline PAFT.

2.3 Sparse Merging

The integration of dense neural network models often results in a suboptimal combined model due to the phenomenon of parameter interference. This challenge has led researchers to explore alternative strategies. Our investigations reveal that by increasing sparsity of a fine-tuned adapter, the performance of merging the adapter with the base model can be improved. Specifically, the parameter δ_{xpo} , derived from adapter training like LoRA, demonstrates clear sparsity, as depicted in Figure 2. In contrast, the sparsity in a SFT adapter, denoted by δ_{sft} , is not pronounced. To increase the spar-

sity within δ_{sft} , we propose the incorporation of an L1 regularization term during the SFT process. This modification to the fine-tuning procedure is expressed mathematically as follows:

$$L_{\text{SFT}_{\text{sparse}}} = L_{\text{SFT}} + \lambda \cdot \|\delta_{\text{sft}}\|_1 \quad (1)$$

Here, L_{SFT} represents the conventional cross-entropy loss function, and λ is a weighting factor that controls the strength of the sparsity regularization. Our results indicate that this approach significantly enhances the sparsity of δ_{sft} , with sparsity levels over 90%, as illustrated by the $\text{SFT}_{\text{sparse}}$ in Figure 2.

Given sparse representations for adapters of both SFT and preference alignment, the challenge is to effectively merge these delta parameters, δ_{sft} and δ_{xpo} , with the original pre-trained model, θ_{pre} , while preserving the performance benefits of SFT and preference alignment. The merging process can be formalized by the equation:

$$\theta_{\text{merge}} = f(\theta_{\text{pre}}, \delta_{\text{dpo}}, \delta_{\text{sft}}) \quad (2)$$

In our study, we explore a variety of merging methods proposed in the literature, including SLERP, Task Arithmetic, TIES, DARE TIES, and Linear. Detailed discussions of these merging methods are provided in the Related Work section.

3 Experiments

3.1 Evaluation Settings

In this study, we conduct comprehensive evaluation on both the Open LLM leaderboard provided by HuggingFace and the AlpacaEval benchmark. The Open LLM Leaderboard benchmark suite encompasses a diverse set of six benchmark tasks, namely ARC, HellaSwag, MMLU, TruthfulQA, Winogrande, and GSM8K, along with their aggregated performance metrics.

In our experiments, we employ two state-of-the-art pre-trained models: Mistral-7B (Jiang et al.,

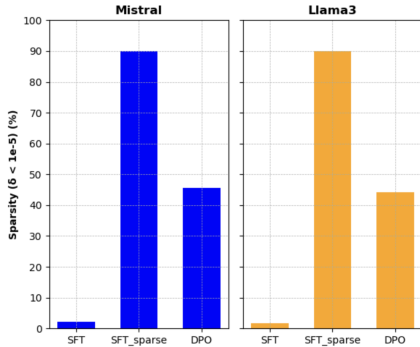


Figure 2: Adapter sparsity for SFT and DPO. The sparsity levels are computed by first merging the parameters from LoRA matrices δ_A and δ_B through matrix multiplication ($\delta = \delta_B \times \delta_A$), and computing the percentage of elements within δ that are less than a threshold of $1 \times e^{-5}$, indicating the proportion of weights approaching zero. The reported sparsity is the average across all layers.

2023) and Llama-3-8B². This section presents the experimental results of merging the delta parameters obtained through SFT and DPO using the LoRA technique. We also study another preference alignment method ORPO for PAFT, which results in the same observations and conclusions as those from DPO. It shows the generalizability of PAFT to different preference alignment techniques. Due to space limit, we put the experimental results for ORPO in the appendix.

Following the Zephyr work (Tunstall et al., 2023), we use the UltraChat (Ding et al., 2023) dataset for SFT and the UltraFeedback (Tunstall et al., 2023) dataset for DPO. UltraChat is a self-refinement dataset consisting of 200K multi-turn dialogues generated by GPT-3.5-Turbo over 30 topics and 20 different types of text material. UltraFeedback consists of 64k prompts, each of which have four LLM responses that are rated by GPT-4 according to criteria like instruction-following, honesty, and helpfulness.

We meticulously explore a spectrum of merging methods, including SLERP, Task Arithmetic, TIES, DARE-enhanced TIES, and Linear combination. Each of these merging strategies is scrutinized to determine its efficacy in integrating the sparsity-induced parameters from LoRA with the original pre-trained models. The goal is to ascertain which

²Note that while the Llama 3 model is referenced in our work, the official documentation for this model has not been released at the time of writing, and thus we cite its official GitHub site as a proxy: <https://github.com/meta-llama/llama3>

method most effectively preserves the performance enhancements attributed to SFT and DPO, thereby contributing to the advancement of model merging methods in LLM research. For training individual adapters, we have used the same settings as in the *zephyr-7b-beta* development³. Our evaluation is conducted using the EleutherAI’s LM Evaluation Harness framework (Gao et al., 2023). We adhere to the same branch (b281b09) used by the HuggingFace Open LLM Leaderboard (Beeching et al., 2023), and evals are run with batch size 1 on an A100 GPU.

The hyper parameter λ in Equation 1 controls the sparsity of δ_{sft} . Empirical values 0.0001 and 0.001 are validated in our experiments to achieve reasonable sparsity.

3.2 Parallel Training vs. Sequential Training

To demonstrate the advantages of parallel training PAFT, we conducted empirical comparison of parallel, sequential and standalone training approaches on the six benchmark tasks using the two pre-trained models: Mistral-7B and Llama-3-8B. The results are given in Table 1. In the Mistral-7B model section, training with DPO alone improves the average score over the base model, while training with SFT alone doesn’t show an improvement. This result reveals that SFT, while focusing on downstream tasks, inadvertently undermines performance due to a lack of alignment with human preferences. Conversely, DPO aims to harmonize the outputs of LLMs with human preferences, resulting in a noticeable improvement in the average score.

Furthermore, we evaluated the sequential training of SFT with L1 regularization followed by DPO, which gave an average score of 0.6387. This score marginally surpasses that of standalone DPO, setting the stage for a comparison with parallel training outcomes. This outcome aligns with our initial hypothesis that during the DPO phase the model appears to discard much of the knowledge acquired in the SFT stage, i.e., alignment tax. Consequently, its performance exhibits only a marginal improvement over the training with DPO-alone.

Additionally, we performed side-by-side evaluations of SFT_{sparse}+DPO training in both parallel and sequential manners. The findings indicate that training SFT with L1 regularization alongside

³<https://github.com/huggingface/alignment-handbook/tree/main/recipes/zephyr-7b-beta>

Base Model: Mistral-7B-v0.1							
Method	ARC	HellaSwag	MMLU	TruthfulQA	Winograde	GSM8K	AVERAGE
PAFT (SFT_{sparse}+DPO)							
SLERP	0.6391	0.8464	0.63961	0.5123	0.794	0.4223	0.64228
Task Arithmetic	0.6519	0.8477	0.63325	0.563	0.794	0.4071	0.64949
TIES	0.6519	0.8551	0.63927	0.5453	0.7946	0.4284	0.65243
DARE TIES	0.6493	0.8526	0.63444	0.5454	0.7964	0.4094	0.64792
Linear	0.6348	0.8451	0.64275	0.505	0.7932	0.4246	0.64091
Parallel SFT+DPO							
SLERP	0.6391	0.8479	0.63937	0.5031	0.7924	0.4124	0.63904
Task Arithmetic	0.651	0.851	0.62998	0.5397	0.8011	0.4117	0.64741
TIES	0.5956	0.8319	0.61651	0.3993	0.7853	0.3071	0.58928
DARE TIES	0.5922	0.8244	0.60471	0.3801	0.7577	0.2767	0.57263
Linear	0.6391	0.846	0.63935	0.4946	0.7995	0.4314	0.64166
Sequential							
SFT _{sparse} +DPO	0.6391	0.8464	0.63461	0.5103	0.7894	0.4123	0.63868
SFT+DPO	0.656	0.8459	0.62634	0.5079	0.7884	0.3836	0.63469
Individual							
SFT _{sparse} -alone	0.6126	0.8233	0.6421	0.4124	0.7711	0.3715	0.6055
SFT-alone	0.6101	0.8216	0.6263	0.4486	0.7798	0.3525	0.6065
DPO-alone	0.6314	0.8487	0.6423	0.4496	0.7932	0.4344	0.6333
Mistral-7B-v0.1	0.6049	0.8320	0.6369	0.4259	0.7814	0.37	0.6085
Base Model: Llama-3-8B							
Method	ARC	HellaSwag	MMLU	TruthfulQA	Winograde	GSM8K	AVERAGE
PAFT (SFT_{sparse}+DPO)							
SLERP	0.6067	0.8367	0.66995	0.5297	0.7837	0.5095	0.65604
Task Arithmetic	0.6118	0.8411	0.66858	0.5552	0.7806	0.5208	0.66301
TIES	0.6101	0.8414	0.67098	0.5313	0.7891	0.5185	0.66023
DARE TIES	0.6067	0.8398	0.66945	0.5232	0.7885	0.5163	0.65732
Linear	0.6049	0.8329	0.67059	0.5168	0.7837	0.5011	0.65166
Parallel SFT+DPO							
SLERP	0.6152	0.8347	0.66248	0.5149	0.7869	0.5171	0.65521
Task Arithmetic	0.6254	0.837	0.66089	0.5266	0.7869	0.5133	0.65835
TIES	0.5879	0.8092	0.65863	0.4283	0.7545	0.4291	0.61127
DARE TIES	0.6007	0.8061	0.65702	0.4233	0.7609	0.4049	0.60882
Linear	0.6152	0.8331	0.66614	0.5082	0.7845	0.5095	0.65277
Sequential							
SFT _{sparse} +DPO	0.5648	0.7984	0.62204	0.4049	0.7766	0.3692	0.58932
SFT+DPO	0.5623	0.7976	0.62258	0.4057	0.7719	0.3662	0.58771
Individual							
SFT _{sparse} -alone	0.5862	0.8177	0.66328	0.4834	0.7719	0.4473	0.6283
SFT-alone	0.6084	0.8135	0.65325	0.4469	0.7648	0.4637	0.62509
DPO-alone	0.6152	0.8412	0.6682	0.5273	0.7845	0.4849	0.65355
Llama-3-8B	0.5947	0.8209	0.66603	0.4391	0.7719	0.4587	0.62522

Table 1: Results of compared methods on the six benchmark tasks

DPO in parallel leads to a performance metric of 0.6524 when merging with the TIES method, over 2% higher than the score achieved by either DPO alone or by training SFT_{sparse} and DPO in sequence. This outcome can be explained by a notable drawback of sequential training which is its tendency to overlook much of the knowledge gained during the SFT stage, suggesting a suboptimal use of SFT data. In contrast, parallel training effectively combines the benefits from SFT and DPO by processing them concurrently. The benefits are mostly preserved during model merging, ensuring efficient utilization of both SFT and DPO data. Our work underscores the enhanced efficacy of the parallel training approach PAFT, which not only maintains

the distinct advantages of SFT and DPO, but also outperforms these techniques when they are used separately or sequentially.

3.3 Sparse Merging vs. Dense Merging

Our study has demonstrated the advantages of incorporating sparsity into fine-tuned models. In the context of sequential training, the inclusion of L1 regularization has yielded a modest yet notable improvement. Specifically, in Table 1, the average score for the sequential SFT_{sparse}+DPO stands at 0.6387, surpassing the sequential SFT+DPO without L1 regularization, with a score of 0.6347. Although the improvement is marginal, it underscores the value of integrating the L1-norm to induce spar-

sity.

The impact of sparsity becomes more pronounced when examining parallel training scenarios. Across all considered model merging techniques, Parallel SFT_{sparse}+DPO, i.e., PAFT, consistently outperforms its counterpart without L1 regularization, Parallel SFT+DPO, thereby highlighting the efficacy of the sparsity induced by L1-norm. Notably, in the case of the TIES and DARE TIES merging methods, the average score disparity is significant. With TIES, PAFT (SFT_{sparse}+DPO) achieves a score of 0.6524, while Parallel SFT+DPO without sparsification lags behind at 0.5893. Similarly, for DARE TIES, PAFT (SFT_{sparse}+DPO) scores 0.6479, outstripping Parallel SFT+DPO's 0.5726. This substantial margin illustrates the robustness of L1-norm sparsity for various merging methods.

The same insights as given in the Mistral-7B section can be gained from the Llama-3-8B section in Table 1. PAFT on Llama-3-8B significantly outperforms Parallel SFT+DPO, sequential training and standalone training. The experimental results confirm the generalizability of PAFT to various pre-trained models.

When comparing different model merging strategies, TIES generally performs better than other methods on both Mistral-7B and Llama-3-8B, exhibiting superior performance over DARE TIES. DARE, which stands for "Drop And REscale", is a method that explicitly increases sparsity by eliminating elements below a certain threshold and rescaling the remaining parameters. In contrast, the L1-norm introduces sparsity implicitly by integrating it into the objective function. Consequently, the impact of the eliminated terms is less pronounced in the final results compared to DARE. This comparison reveals the advantages of the L1-norm's explicit sparsity induction over the implicit approach employed by DARE.

3.4 Comparison with State-of-the-art LLMs

On the online Open LLM Leaderboard, we performed PAFT on the Neurotic-7B⁴ and MoMo-70B⁵ base models. The two PAFT-ed models significantly improved over the respective base models, and achieved Rank #1 in the 7B/8B model category and globally on the online Open LLM Leaderboard,

⁴<https://huggingface.co/liminerity/Neurotic-Jomainotrik-7b-slerp>

⁵https://huggingface.co/leejunhyeok/MoMo-70B-LoRA-V1.2_1

respectively, showing the effectiveness of PAFT on various base models. Table 2 gives the results of our PAFT-ed models and the existing state-of-the-art models on the Leaderboard.

Additionally, we compared the two PAFT-ed models with existing state-of-the-art LLMs on the AlpacaEval benchmark (Li et al., 2023), where every model generates responses to 805 questions on different topics, mostly focused on helpfulness. The models are judged by GPT-4, and the final metric is the pairwise win-rate against GPT-4. As shown in Table 3, the PAFT-ed 70B model outperforms existing state-of-the-art LLMs, except *GPT-4 Preview* and *Claude 3 Opus* in LC (Length-controlled) Win-Rate. While the GPT-4 judge favors its own GPT model family, the PAFT-ed 70B model performs better than *GPT-4 (03/14)* and *GPT 3.5 Turbo* do. On the other hand, the PAFT-ed 7B model outperforms all the 7B/8B and smaller models on AlpacaEval. It even beats some larger models, such as *DBRX Instruct* and *Mixtral 8x7B*.

4 Related Work

4.1 SFT and Human Preference Alignment

The groundbreaking achievements of BERT (Devlin et al., 2019) and GPT (OpenAI, 2023) have underscored the significance of pretraining and supervised fine-tuning (SFT) techniques. To mitigate ethical concerns and ensure such language model outputs are aligned with human values, a subsequent alignment step employs human feedback to enhance the efficacy of pretraining (Christiano et al., 2023), fine-tuning (Ziegler et al., 2020), and adaptability for scaling purposes (Leike et al., 2018). (Kreutzer et al., 2018) found that implicit task feedback often outperforms explicit user feedback, leading to other high-quality datasets of human-generated summaries to compare with those produced by LLMs, resulting in superior quality outputs compared to SFT and human benchmarks (Stiennon et al., 2022). Recent advancements by models such as GPT (OpenAI, 2023), Claude (Bai et al., 2022), Llama (Touvron et al., 2023), and Gemini (Team, 2024) have all leveraged human comparison feedback to refine output quality through alignment, a method also known as reinforcement learning from human feedback (RLHF).

RLHF models employ the Bradley-Terry model to develop a reward function that emulates human preferences between two candidate responses (Bradley and Terry, 1952). This reward model

LLM	ARC	HellaSwag	MMLU	TruthfulQA	Winograde	GSM8K	AVERAGE
PAFT (Ein-70B)	0.7986	0.9149	0.7805	0.7514	0.8777	0.7544	0.8129
Mixtral-8x22B-Instruct	0.727	0.8908	0.7777	0.6814	0.8516	0.8203	0.7915
Llama-3-70B-Instruct	0.7142	0.8569	0.8006	0.6181	0.8287	0.8544	0.7788
PAFT (TextBase-7B)	0.7389	0.9027	0.6478	0.7813	0.8603	0.6793	0.7684
Cohere-Command-R+	0.7099	0.8856	0.7573	0.563	0.854	0.7074	0.7462
DBRX-132B-Instruct	0.6783	0.8885	0.7372	0.6702	0.8208	0.6732	0.7447
OpenChat-3.5	0.6604	0.8293	0.6504	0.519	0.8177	0.6816	0.693
Llama-3-8B-Instruct	0.6075	0.7855	0.6707	0.5165	0.7451	0.6869	0.6687
Mistral-7B-Instruct-v0.2	0.6314	0.8488	0.6078	0.6826	0.7719	0.4003	0.6571
Gemma-7B	0.6109	0.8247	0.6603	0.4491	0.7845	0.5277	0.6429

Table 2: Comparison with state-of-the-art LLMs on Open LLM Leaderboard (All the scores are obtained from the Leaderboard)

lays the groundwork for applying reinforcement learning to LLMs, drawing inspiration from Proximal Policy Optimization (PPO) techniques (Schulman et al., 2017). Direct Preference Optimization (DPO) streamlines the alignment process by integrating reward training with LLM alignment, thereby simplifying the training regimen through a direct relationship between the reward function and policy in reinforcement learning (Rafailov et al., 2023). However, the efficacy of DPO in practice remains an area for further exploration (Xu et al., 2024). Odds-ratio Preference Optimization (ORPO) (Hong et al., 2024) is an alternative alignment paradigm that aims to replace sequential SFT + DPO with a single monolithic optimization algorithm. It directly optimizes for preferences between two candidate generations by maximizing the ratio of odds of the winning generation w.r.t. losing generation to simultaneously reward logits of desired tokens and penalize logits of undesired tokens.

SFT and Human Preference Alignment serve

LLM	LC WinRate	WinRate
GPT-4 Preview	50.0%	50.0%
Claude 3 Opus	40.5%	29.1%
PAFT 70B	38.6%	26.5%
GPT-4 (03/14)	35.3%	22.1%
Claude 3 Sonnet	34.9%	25.6%
Llama 3 70B Instruct	34.4%	33.2%
Mixtral 8x22B v0.1	30.9%	22.2%
PAFT 7B	30.6%	22.8%
DBRX Instruct	25.4%	18.4%
Mixtral 8x7B v0.1	23.7%	18.3%
Llama 3 8B Instruct	22.9%	22.6%
GPT 3.5 Turbo	22.7%	14.1%
Mistral 7B v0.2	17.1%	14.7%

Table 3: Comparison with state-of-the-art LLMs on the AlpacaEval benchmark using GPT-4 as a judge

distinct objectives and should be approached as components of a multi-objective optimization problem. SFT focused on enhancing the performance of LLMs in downstream tasks, whereas alignment seeks to address ethical concerns. Prior research on RLHF often treats alignment as a compromise that could potentially degrade the model’s output quality while address ethical problems (Ouyang et al., 2022). Consequently, SFT and alignment are typically implemented in a sequential manner to ensure the safety of LLMs while accepting some degree of capability loss (Hou et al., 2024). In contrast, Bai et al. have claimed that ‘Smaller models experience severe ‘alignment taxes’ – their performance on a wide variety of evaluations declines after RLHF training. However, we find a variety of alignment bonuses, with our 13B and 52B RLHF-trained models performing better at zero-shot NLP evaluations, and the same at few-shot evaluations’ (Bai et al., 2022). This divergence in findings motivates further exploration into the interplay between SFT and alignment. Specifically, there is a strong interest in devising a method to integrate SFT and alignment in such a manner that yields an ‘alignment bonus.’

4.2 Sparsity for LLMs

As the size of LLMs continues to increase, the importance of compression becomes crucial for deploying them on edge devices. This is done to reduce costs and improve inference speed (Zhu et al., 2023). Various compression strategies for LLMs exist, with a focus on pruning (Han et al., 2015) and Low Rank Adapters (LoRA) (Hu et al., 2022). Pruning involves creating sparsity through pretraining, magnitude-based pruning, and fine-tuning the remaining weights (Han et al., 2015). LoRA suggests representing a matrix as the product of two low-rank matrices to reduce memory storage requirements (Hu et al., 2022). Recent research has

shown that the magnitudes of parameters trained by LoRA in SFT process are relatively small. A strategy has been developed where random pruning is applied to these small SFT parameters with a ratio p , followed by multiplying the remaining parameters by $\frac{1}{1-p}$ to enhance model performance (Yu et al., 2023). Merging sparsity models trained on different tasks has led to significant improvements in downstream tasks like AlpacaEval and GSM8K. This method involves applying pruning to introduce more sparsity in SFT using LoRA. Other methods for inducing sparsity in SFT parameters exist like incorporating the L1 norm in the loss function, similar to techniques used in Lasso regression (Santosa and Symes, 1986) and compressed sensing (Candes et al., 2006). A Bayesian interpretation of the L1-norm on the weights amounts to assuming a standard Laplacian prior on the parameters which is centered more closely around mean of zero. This concept will guide the research in this paper.

4.3 Model Merging

Combining skills learnt from different types of datasets in a single model provides multiple benefits like better in-domain performance (Pothe et al., 2021), out-of-domain generalization (Wang et al., 2020), and a more parameter efficient model w.r.t. specialized models. Joint multi-task learning is one way to achieve this, but it has several difficulties: it is costly to train a single model across all tasks and it is non-trivial to find the correct task-mix to ensure a jointly optimal performance across all tasks (Fifty et al., 2021). A wide variety of model merging methods to combine specialized models into a stronger merged model have emerged as an alternative to multi-task training. (Wortsmann et al., 2022) introduced the paradigm of averaging model weights from separate fine-tuned models to create a stronger merged model in *ModelSoup*, achieving SOTA in several different benchmarks. *Fisher merging* from (Matena and Raffel, 2022) proposed to improve upon naively averaging all model weights by instead using a weighted average of the parameters. They identified the importance of each individual parameter based on its Fisher Information to use as the coefficient in the weighted average. (Ilharco et al., 2023) further showed that one could influence the merged model’s performance in several ways via task-arithmetic on task-vectors (additive weight adaptors): forgetting undesired traits via negation, learning tasks by addition, or learning entirely new tasks by analogies.

(Jin et al., 2023) proposed *RegMean* where they solve a local closed-form linear-regression problem to estimate the merged model parameters for each individual linear layer. (Yadav et al., 2023) demonstrated that the phenomenon of parameter interference during model-merging leads to performance degradation in merged models. They cited this interference to two main sources - redundant parameter-updates, i.e. updates not crucial to a model’s prediction, and sign disagreement between different parameter-updates. To overcome such destructive interference, they proposed *TIES-Merging* which has two filtering steps before model-merging. First, only the top-k% updates by magnitude are retained in each task-vector. Next, the dominant sign is chosen as $\text{sgn}(\sum_i(\text{sgn}(\theta_i)))$ and only those updates whose sign agrees with the dominant sign are finally averaged and merged.

5 Conclusions

LLM fine-tuning generally undergoes a two-stage training process, with SFT applied initially, followed by preference alignment. Yet, research indicates that this sequential approach incurs an "alignment tax", compromising the LLM’s overall performance. To counteract this, we advocate for a parallel training strategy PAFT which preserves the advantages of both SFT and preference alignment without incurring the alignment tax associated with sequential training. A significant hurdle in parallel training is the potential for conflict during the model merging phase, where the merging of different adapters can lead to diminished performance. In this paper, we propose the integration of an L1 regularization to the training loss during the SFT phase to induce sparsity, thereby reducing interference between models.

Our experimental results demonstrate the efficacy of incorporating an L1-norm into the SFT process for sparsification and utilizing a parallel training framework over the typical sequential approach. When combining all of them together, i.e. Parallel SFT_{sparse}+DPO achieves the state-of-art results on both the LLM leaderboard by HuggingFace and the AlpacaEval benchmark. The ORPO experimental results given in the appendix show the same patterns, demonstrating the generalizability of our PAFT to various preference alignment methods. This comprehensive strategy highlights how the methods of integrating SFT with preference alignment can greatly enhance LLM fine-tuning.

6 Limitations

There are a couple of limitations of the parallel training of SFT and preference alignment. Firstly, we have found that sparsity aids in model merging, though the reasons behind this benefit and why DPO initially induces sparsity in the adapter remain unanswered.

Moreover, sparsity can reduce model interference during merging, but the scalability of this approach is still in question. If a merged model deployed in production fails in some cases, it is underexplored how to improve the model responses in these cases. Directly performing SFT on the merged model may lead to catastrophic forgetting of what it learned earlier. On the other hand, parallel training necessitates merging a new SFT-ed model with the existing merged model, adding complexity to the process.

The primary risk associated with this paper pertains to its data usage. Currently, UltraChat data is employed for SFT, while UltraFeedback data is used for preference alignment. UltraChat consists solely of multi-round dialogue data, which inherently limits its format diversity. To enhance the robustness and applicability of the model, it is crucial to incorporate a wider variety of data types beyond dialogue data. Additionally, UltraFeedback relies on annotations generated by GPT-4, which inevitably include errors and inaccurate feedback. To mitigate these risks, higher-quality datasets are needed in the future.

References

- Amanda Askell, Yuntao Bai, Anna Chen, Dawn Drain, Deep Ganguli, Tom Henighan, Andy Jones, Nicholas Joseph, Benjamin Mann, Nova DasSarma, Nelson Elhage, Zac Hatfield-Dodds, Danny Hernandez, John Kernion, Kamal Ndousse, Catherine Olsson, Dario Amodei, Tom B. Brown, Jack Clark, Sam McCandlish, Christopher Olah, and Jared Kaplan. 2021. A general language assistant as a laboratory for alignment. *ArXiv*, abs/2112.00861.
- Yuntao Bai, Andy Jones, Kamal Ndousse, Amanda Askell, Anna Chen, Nova DasSarma, Dawn Drain, Stanislav Fort, Deep Ganguli, Tom Henighan, Nicholas Joseph, Saurav Kadavath, Jackson Kernion, Tom Conerly, Sheer El-Showk, Nelson Elhage, Zac Hatfield-Dodds, Danny Hernandez, Tristan Hume, Scott Johnston, Shauna Kravec, Liane Lovitt, Neel Nanda, Catherine Olsson, Dario Amodei, Tom Brown, Jack Clark, Sam McCandlish, Chris Olah, Ben Mann, and Jared Kaplan. 2022. [Training a helpful and harmless assistant with reinforcement learning from human feedback](#). *Preprint*, arXiv:2204.05862.
- Edward Beeching, Clémentine Fourrier, Nathan Habib, Sheon Han, Nathan Lambert, Nazneen Rajani, Omar Sanseviero, Lewis Tunstall, and Thomas Wolf. 2023. Open llm leaderboard. https://huggingface.co/spaces/open-llm-leaderboard/open_llm_leaderboard.
- Ralph Allan Bradley and Milton E. Terry. 1952. [Rank analysis of incomplete block designs: I. the method of paired comparisons](#). *Biometrika*, 39(3/4):324–345.
- E.J. Candes, J. Romberg, and T. Tao. 2006. [Robust uncertainty principles: exact signal reconstruction from highly incomplete frequency information](#). *IEEE Transactions on Information Theory*, 52(2):489–509.
- Paul Christiano, Jan Leike, Tom B. Brown, Miljan Martić, Shane Legg, and Dario Amodei. 2023. [Deep reinforcement learning from human preferences](#). *Preprint*, arXiv:1706.03741.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [Bert: Pre-training of deep bidirectional transformers for language understanding](#). *Preprint*, arXiv:1810.04805.
- Ning Ding, Yulin Chen, Bokai Xu, Yujia Qin, Shengding Hu, Zhiyuan Liu, Maosong Sun, and Bowen Zhou. 2023. [Enhancing chat language models by scaling high-quality instructional conversations](#). In *The 2023 Conference on Empirical Methods in Natural Language Processing*.
- Christopher Fifty, Ehsan Amid, Zhe Zhao, Tianhe Yu, Rohan Anil, and Chelsea Finn. 2021. [Efficiently identifying task groupings for multi-task learning](#). In *Neural Information Processing Systems*.
- Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muennighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. 2023. [A framework for few-shot language model evaluation](#).
- Song Han, Jeff Pool, John Tran, and William J. Dally. 2015. [Learning both weights and connections for efficient neural networks](#). *Preprint*, arXiv:1506.02626.
- Torsten Hoefler, Dan Alistarh, Tal Ben-Nun, Nikoli Dryden, and Alexandra Peste. 2021. Sparsity in deep learning: pruning and growth for efficient inference and training in neural networks. *J. Mach. Learn. Res.*, 22(1).
- Jiwoo Hong, Noah Lee, and James Thorne. 2024. Orpo: Monolithic preference optimization without reference model. *arXiv preprint arXiv:2403.07691*, 2(4):5.

- Zhenyu Hou, Yilin Niu, Zhengxiao Du, Xiaohan Zhang, Xiao Liu, Aohan Zeng, Qinkai Zheng, Minlie Huang, Hongning Wang, Jie Tang, and Yuxiao Dong. 2024. [Chatglm-rlhf: Practices of aligning large language models with human feedback](#). *Preprint*, arXiv:2404.00934.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. [LoRA: Low-rank adaptation of large language models](#). In *International Conference on Learning Representations*.
- Gabriel Ilharco, Marco Tulio Ribeiro, Mitchell Wortsman, Ludwig Schmidt, Hannaneh Hajishirzi, and Ali Farhadi. 2023. [Editing models with task arithmetic](#). In *The Eleventh International Conference on Learning Representations*.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. 2023. [Mistral 7b](#). *Preprint*, arXiv:2310.06825.
- Xisen Jin, Xiang Ren, Daniel Preotiuc-Pietro, and Pengxiang Cheng. 2023. [Dataless knowledge fusion by merging weights of language models](#). In *The Eleventh International Conference on Learning Representations*.
- Julia Kreutzer, Shahram Khadivi, Evgeny Matusov, and Stefan Riezler. 2018. [Can neural machine translation be improved with user feedback?](#) In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 3 (Industry Papers)*, pages 92–105, New Orleans - Louisiana. Association for Computational Linguistics.
- Jan Leike, David Krueger, Tom Everitt, Miljan Martic, Vishal Maini, and Shane Legg. 2018. [Scalable agent alignment via reward modeling: a research direction](#). *Preprint*, arXiv:1811.07871.
- Xuechen Li, Tianyi Zhang, Yann Dubois, Rohan Taori, Ishaan Gulrajani, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. 2023. [AlpacaEval: An automatic evaluator of instruction-following models](#). https://github.com/tatsu-lab/alpaca_eval.
- Michael Matena and Colin Raffel. 2022. [Merging models with fisher-weighted averaging](#). *Preprint*, arXiv:2111.09832.
- OpenAI. 2023. [Gpt-4 technical report](#). *ArXiv*, abs/2303.08774.
- Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. 2022. [Training language models to follow instructions with human feedback](#). *Preprint*, arXiv:2203.02155.
- Clifton Poth, Jonas Pfeiffer, Andreas R  ckl  , and Iryna Gurevych. 2021. [What to pre-train on? Efficient intermediate task selection](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 10585–10605, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. 2023. [Direct preference optimization: Your language model is secretly a reward model](#). *Preprint*, arXiv:2305.18290.
- Fadil Santosa and William W. Symes. 1986. [Linear inversion of band-limited reflection seismograms](#). *SIAM Journal on Scientific and Statistical Computing*, 7(4):1307–1330.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. [Proximal policy optimization algorithms](#). *Preprint*, arXiv:1707.06347.
- Ziang Song, Tianle Cai, Jason D. Lee, and Weijie J. Su. 2023. [Reward collapse in aligning large language models](#). *arXiv*.
- Nisan Stiennon, Long Ouyang, Jeff Wu, Daniel M. Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford, Dario Amodei, and Paul Christiano. 2022. [Learning to summarize from human feedback](#). *Preprint*, arXiv:2009.01325.
- Gemini Team. 2024. [Gemini: A family of highly capable multimodal models](#). *Preprint*, arXiv:2312.11805.
- Georg Thimm and Emile Fiesler. 1995. [Evaluating pruning methods](#).
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutik Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madsen Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. [Llama 2: Open foundation and fine-tuned chat models](#). *Preprint*, arXiv:2307.09288.

Lewis Tunstall, Edward Beeching, Nathan Lambert, Nazneen Rajani, Kashif Rasul, Younes Belkada, Shengyi Huang, Leandro von Werra, Cl  mentine Fourrier, Nathan Habib, Nathan Sarrazin, Omar Sanseviero, Alexander M. Rush, and Thomas Wolf. 2023. [Zephyr: Direct distillation of lm alignment](#). *Preprint*, arXiv:2310.16944.

Jing Wang, Mayank Kulkarni, and Daniel Preotiuc-Pietro. 2020. [Multi-domain named entity recognition with genre-aware and agnostic inference](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8476–8488, Online. Association for Computational Linguistics.

Mitchell Wortsman, Gabriel Ilharco, Samir Ya Gadre, Rebecca Roelofs, Raphael Gontijo-Lopes, Ari S Morcos, Hongseok Namkoong, Ali Farhadi, Yair Carmon, Simon Kornblith, and Ludwig Schmidt. 2022. [Model soups: averaging weights of multiple fine-tuned models improves accuracy without increasing inference time](#). In *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 23965–23998. PMLR.

Shusheng Xu, Wei Fu, Jiaxuan Gao, Wenjie Ye, Weilin Liu, Zhiyu Mei, Guangju Wang, Chao Yu, and Yi Wu. 2024. [Is dpo superior to ppo for llm alignment? a comprehensive study](#). *Preprint*, arXiv:2404.10719.

Prateek Yadav, Derek Tam, Leshem Choshen, Colin Raffel, and Mohit Bansal. 2023. TIES-merging: Resolving interference when merging models. In *Thirty-seventh Conference on Neural Information Processing Systems*.

Le Yu, Bowen Yu, Haiyang Yu, Fei Huang, and Yongbin Li. 2023. Language models are super mario: Absorbing abilities from homologous models as a free lunch. *arXiv preprint arXiv:2311.03099*.

Xunyu Zhu, Jian Li, Yong Liu, Can Ma, and Weiping Wang. 2023. [A survey on model compression for large language models](#). *Preprint*, arXiv:2308.07633.

Daniel M. Ziegler, Nisan Stiennon, Jeffrey Wu, Tom B. Brown, Alec Radford, Dario Amodei, Paul Christiano, and Geoffrey Irving. 2020. [Fine-tuning language models from human preferences](#). *Preprint*, arXiv:1909.08593.

A PAFT Performance with a Different Preference Optimization Algorithm

The stronger performance of PAFT is also confirmed with a different choice of preference alignment algorithm. Table 4 shows experimental results with ORPO as the preference alignment method alongside SFT with the Llama-3-8B base model. We observe a similar trend where finetuning the LLM sequentially via SFT followed by ORPO underperforms all the parallelly trained variants. Even simple model merging methods such as Task Arithmetic and Linear merging perform strongly, outperforming more complicated methods like DARE TIES in both experiment settings.

Base Model: Meta-Llama-3-8B							
Method	ARC	HellaSwag	MMLU	TruthfulQA	Winograde	GSM8K	AVERAGE
PAFT (SFT_{sparse}+ORPO)							
SLERP	0.599	0.8217	0.665	0.4926	0.7845	0.4898	0.6421
Task Arithmetic	0.5964	0.8214	0.6655	0.4995	0.783	0.4814	0.6412
TIES	0.5947	0.8226	0.66358	0.4931	0.783	0.4852	0.64036
DARE TIES	0.593	0.8224	0.6637	0.4921	0.783	0.4738	0.638
Linear	0.5964	0.8206	0.6654	0.4923	0.7814	0.4905	0.6411
Parallel SFT+ORPO							
SLERP	0.6049	0.8227	0.668	0.4905	0.783	0.4951	0.644
Task Arithmetic	0.6152	0.8209	0.6621	0.4908	0.7845	0.4989	0.6454
TIES	0.593	0.8139	0.6633	0.4446	0.768	0.467	0.6250
DARE TIES	0.5981	0.8101	0.66	0.4398	0.7632	0.4534	0.6208
Linear	0.6067	0.8222	0.6685	0.4868	0.783	0.4989	0.6444
Sequential							
SFT _{sparse} +ORPO	0.5563	0.8018	0.62116	0.4068	0.7719	0.3662	0.58736
SFT+ORPO	0.5589	0.8021	0.62142	0.4092	0.7711	0.3677	0.5884
Llama-3-8B	0.5947	0.8209	0.64854	0.4391	0.7719	0.4587	0.62231

Table 4: Results of compared methods with ORPO on the six benchmark tasks