

Human-AI Collaborative Taxonomy Construction: A Case Study in Profession-Specific Writing Assistants

Minhwa Lee
University of Minnesota
Twin Cities, Minnesota, USA
lee03533@umn.edu

Vivek Khetan
Accenture Labs
San Francisco, California, USA
vivek.a.khetan@accenture.com

Zae Myung Kim
University of Minnesota
Twin Cities, Minnesota, USA
kim01756@umn.edu

Dongyeop Kang
University of Minnesota
Twin Cities, Minnesota, USA
dongyeop@umn.edu

ABSTRACT

Large Language Models (LLMs) have assisted humans in several writing tasks, including text revision and story generation. However, their effectiveness in supporting domain-specific writing, particularly in business contexts, is relatively less explored. Our formative study with industry professionals revealed the limitations in current LLMs' understanding of the nuances in such domain-specific writing. To address this gap, we propose an approach of human-AI collaborative taxonomy development to perform as a guideline for domain-specific writing assistants. This method integrates iterative feedback from domain experts and multiple interactions between these experts and LLMs to refine the taxonomy. Through larger-scale experiments, we aim to validate this methodology and thus improve LLM-powered writing assistance, tailoring it to meet the unique requirements of different stakeholder needs.

CCS CONCEPTS

- **Computing methodologies** → *Natural language generation*;
- **Human-centered computing** → **Collaborative and social computing design and evaluation methods**.

KEYWORDS

Human-AI Collaboration, Taxonomy, AI-assisted Writing

1 INTRODUCTION

The emergence of large language models (LLMs) has significantly enriched the writing support tools, covering text revisions [2, 17, 19] to creative content generation [1, 9, 14]. However, the deployment of LLMs in tailored writing assistance to specific stakeholder needs (e.g., legal writing) remains relatively unexplored. This oversight highlights a concern about the reliability of AI-driven tools in meeting the nuanced demands of domain-specific writing. Also, commercial offerings, such as the company Writer's LLM-powered writing assistants for business sectors (e.g., Palmyra [21]), are not widely accessible. This raises questions about the essential steps to develop publicly available AI writing assistants that cater to different stakeholders' unique needs and knowledge.

Motivated by these challenges, we conducted a formative study with current business professionals, which revealed LLM's inadequate understanding of profession-level writing. The study also

found a huge need to categorize a vast array of domain-specific conventions and requirements in writing tasks and make a structured taxonomy of such context.

Therefore, we propose a novel approach of "human-AI collaborative taxonomy construction" for the use of domain-specific writing support. Such taxonomy construction can serve as a foundational step in developing AI writing assistants that can precisely interpret and generate text that aligns with the varied expectations of different professions. Also, based on the rigorous business expert validation procedures and a variety of human-AI interaction strategies, our approach can bolster the reliability of AI writing assistants customized to specific domains. For the rest of the paper, we interchangeably use the terms 'domain-specific writing' and 'profession-specific writing'.

2 FORMATIVE STUDY: CHALLENGES OF USING LLMs AS DOMAIN-SPECIFIC WRITING ASSISTANTS

To assess the effectiveness of LLMs as domain-specific writing assistants, we conducted an initial formative study¹ with two professionals from the marketing and human resources (HR) sectors, each with over five years of field experience. These participants, referred to as P1 and P2, were asked to (1) provide inputs to GPT-4 to generate a writing template relevant to their field; (2) revise the template; and (3) categorize each edit according to predefined revision types outlined in a taxonomy [3], along with providing rationales behind their edits. The qualitative data was analyzed using thematic analysis and open coding techniques. For a detailed description of the study procedures, please refer to Appendix A.

2.1 Limited Understanding of Nuances in Business Writing by LLMs

We found that GPT-4's output often fails to align with the stylistic and linguistic expectations due to a lack of knowledge about domain-specific writing. First, the participants commonly criticized **clarity**, especially its verbosity (Figure 2): "*The paragraph is too lengthy and I would like to get to the point right away.*" (P1) and "*... need to get driven to the CTA (Call-to-Action) as soon as possible... they don't want long emails.*" (P2). Second, the study participants

¹This research has been approved by the Institutional Review Board (IRB) of the first author's institution.



Figure 1: An end-to-end pipeline of our three-step Human-AI collaborative taxonomy construction process. For each step, we portray several design implications for better human-AI interaction strategies that were described in Section 3.

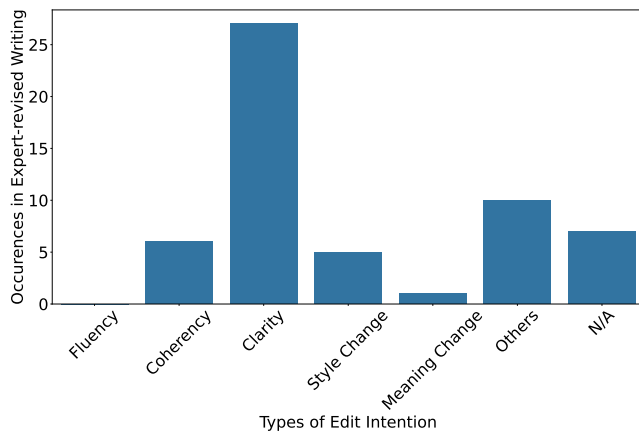


Figure 2: The distribution of revision intentions annotated by the study participants across six writing templates generated by GPT-4.

highlighted (1) **lack of coherency** and (2) **style changes**. They commonly showed concern in GPT-4’s lack of precision in word choice and organization structure that could **misinterpret or dilute the intended delivery in a business context**: “The word ‘essential’ is subject to interpretation. Saying ‘absolutely necessary’ might suggest the company is in such dire straits that people might leave the organization...” (P1) and “Needs to call out sections to get the readers’ attention. This is also the general style of a proposal.” (P2). Third, all participants mentioned that GPT-4 created **its own narratives** that were not asked in the prompt and did not reflect objective details requested by the participant in the output. And finally, the participants who marked the “Other” category (Figure 2) pointed out LLMs’ **lack of understanding about the objective of a writing task** (i.e., P2 mentioned “...a minute is to highlight what was discussed and action steps. Needs to be easy to read and call out sections a reader may care about.”).

From this formative study, we observed that current LLMs often lack nuanced comprehension of domain-specific expectations

unless provided with detailed guidelines for their generated writing. Consequently, we identified the need to **develop a more sophisticated taxonomy of writing specific to various business domains**. This taxonomy will serve as a guideline, enhancing the pipeline for model training and enabling more tailored revision suggestions in domain-specific writing contexts.

3 HUMAN-AI COLLABORATIVE TAXONOMY CONSTRUCTION

In this section, we propose a novel task of “human-AI collaborative taxonomy construction” as an application to better develop a domain-specific AI writing assistant, following the standard procedures of taxonomy construction [15]. Grounded on the design implications of LLM-assisted qualitative analysis process [5, 11, 12, 26, 27, 29], we suggest the three-step approach with several design ideas (Figure 1). Also, we present the promising results from our partial empirical testing of this three-step approach using a simplified scenario, as described in Appendix B.

3.1 STEP 1: Taxonomy Generation

This process harnesses the capabilities of LLMs to generate all components of taxonomy from scratch², given the absence of domain-specific data or an existing taxonomy, which are typically required in traditional construction processes [15]. Based on the user inputs about a certain domain and sophisticated designed output guidelines in the prompt design [14, 24], we **hierarchically generate each level of taxonomy**. Additionally, to address concerns of transparency and explainability in AI [4, 6, 7], LLMs are prompted to **provide reasoning** for each generated element, increasing trustworthiness in the output.

3.2 STEP 2: Taxonomy Validation

To mitigate concerns about the dependence on artificially generated taxonomy as a beginning step of taxonomy construction, we perform multiple rounds of rigorous human expert validations and

²LLMs are trained on extensive and diverse datasets encompassing vast world knowledge [13], hence we task them with generating elements of the taxonomy.

improvements, via **dialogue-based user interaction**. Inspired by several NLP works that proposed multiple LLM workarounds for a single task [18, 23, 25], our work suggests a novel approach of “LLMs-as-Mediators” as a human-AI interaction design during this validation process. Here, we employ multiple LLMs with different roles: (1) ‘Interviewer LLM’ for asking questions and getting expert replies over multiple iterations through dialogue and (2) ‘Creator LLM’ for generating the improved version of the taxonomy based on the received expert feedback from ‘Interviewer LLM’.

3.3 Step 3: Taxonomy Merging & Testing

To foster greater consensus among researchers, we propose a method where LLMs aggregate and merge multiple finalized outputs from several experts within the same domain. Moreover, LLMs will ensure that the elements of the combined output are comprehensive and non-overlapping. By leveraging LLMs, we aim to mitigate individual biases and enhance the reliability of the generated taxonomy. Subsequently, following established practices in taxonomy evaluation processes [15, 20], both human experts and LLMs will independently annotate writing templates using the constructed taxonomy. We will assess the inter-coder reliability (ICR) between human coders and between LLM and expert annotations. High ICR scores between both sets of annotators would confirm the substantial reliability of the taxonomy for the specific domain.

4 FUTURE PLANS

Our plan involves developing a user-friendly web application with two main components: (1) a hierarchical taxonomy display and (2) a chat dialogue interface with an Interviewer LLM. Through iterative dialogue, users will validate and refine the taxonomy, while recent prompting techniques like ReAct [28] and ART [16] will define desired LLM behaviors. Furthermore, we plan to conduct the experiments with open-source models (e.g., Mistral [10], LLaMA [22], OLMo [8], etc.) in addition to GPT-4. Lastly, we will recruit domain experts via a freelancing platform (e.g., Upwork³) for multiple human studies to ensure the effectiveness of our approach.

REFERENCES

- [1] Tuhin Chakrabarty, Vishakh Padmakumar, and He He. 2022. Help me write a poem: Instruction Tuning as a Vehicle for Collaborative Poetry Writing. arXiv:2210.13669 [cs.CL]
- [2] Wanyu Du, Zae Myung Kim, Vipul Raheja, Dhruv Kumar, and Dongyeop Kang. 2022. Read, Revise, Repeat: A System Demonstration for Human-in-the-loop Iterative Text Revision. In *Proceedings of the First Workshop on Intelligent and Interactive Writing Assistants (In2Writing 2022)*, Ting-Hao ‘Kenneth’ Huang, Vipul Raheja, Dongyeop Kang, John Joon Young Chung, Daniel Gissin, Mina Lee, and Katy Ilnonka Gero (Eds.). Association for Computational Linguistics, Dublin, Ireland, 96–108. <https://doi.org/10.18653/v1/2022.in2writing-1.14>
- [3] Wanyu Du, Vipul Raheja, Dhruv Kumar, Zae Myung Kim, Melissa Lopez, and Dongyeop Kang. 2022. Understanding Iterative Revision from Human-Written Text. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Association for Computational Linguistics, Dublin, Ireland, 3573–3590. <https://aclanthology.org/2022.acl-long.250>
- [4] Yogesh K. Dwivedi, Nir Kshetri, Laurie Hughes, Emma L. Slade, Anand Jayaraj, A. K. Kar, Abdullah Mohammed Baabdullah, Alex Koohang, Vishnupriya Raghavan, Manju K. Ahuja, Hanaa Albanna, Mousa Ahmad Albashrawi, Adil S. Al-Busaidi, Janarthanan Balakrishnan, Yves Barlette, Sriparna Basu, Indranil Bose, Laurence D. Brooks, Dimitrios Buhalis, Lemuria D. Carter, Soumyadeb Chowdhury, Tom Crick, Scott W. Cunningham, Gareth Huw Davies, Robert M. Davison, Rahul De’, Denis Dennehy, Yanqing Duan, Rameshwar Dubey, Rohita Dwivedi, John S. Edwards, Carlos Flavián, Robin Gauld, Varun Grover, Mei-Chih Hu, Marijn Janssen, Paulette Camp Jones, Iris A. Junglas, Sangeeta Khorrana, Sascha Kraus, Kai R. T. Larsen, Paul Latreille, Sven Laumer, F. Tegwen Malik, Abbas Mardani, Marcello M. Mariani, Sunil Mithas, Emmanuel Mogaji, Jeretta Horn Nord, Siobhán O’Connor, Fevzi Okumus, Margherita Pagani, Neeraj Pandey, Savvas Papagiannidis, Ilias O. Pappas, Nishith Pathak, Jan Pries-Heje, Ramakrishnan Raman, Nripendra P. Rana, Sven-Volker Rehm, Samuel Ribeiro-Navarrete, Alexander Richter, Frantz Rowe, Suprateek Sarker, Bernd Carsten Stahl, Manoj Kumar Tiwari, Wil M.P. van der Aalst, Viswanath Venkatesh, Giampaolo Viglia, Michael Wade, Paul Walton, Jochen Wirtz, and Ryan D. Wright. 2023. Opinion Paper: “So what if ChatGPT wrote it?” Multidisciplinary perspectives on opportunities, challenges and implications of generative conversational AI for research, practice and policy. *Int. J. Inf. Manag.* 71 (2023), 102642. <https://api.semanticscholar.org/CorpusID:257486916>
- [5] Jie Gao, Kenny Tsu Wei Choo, Junming Cao, Roy Ka-Wei Lee, and Simon T. Perrault. 2023. CoAIcoder: Examining the Effectiveness of AI-assisted Human-to-Human Collaboration in Qualitative Analysis. *ACM Transactions on Computer-Human Interaction* 31 (2023), 1–38. <https://api.semanticscholar.org/CorpusID:260125537>
- [6] Simret Araya Gebreegziabher, Zheng Zhang, Xiaohang Tang, Yihao Meng, Elena L. Glassman, and Toby Jia-Jun Li. 2023. PaTAT: Human-AI Collaborative Qualitative Coding with Explainable Interactive Rule Synthesis. *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems* (2023). <https://api.semanticscholar.org/CorpusID:258216675>
- [7] Catalina Gomez, Sue Min Cho, Shichang Ke, Chien-Ming Huang, and Mathias Unberath. 2023. Designing AI Support for Human Involvement in AI-assisted Decision Making: A Taxonomy of Human-AI Interactions from a Systematic Review. arXiv:2310.19778 [cs.HC]
- [8] Dirk Groeneveld, Iz Beltagy, Pete Walsh, Akshita Bhagia, Rodney Kinney, Oyvind Tafjord, Ananya Harsh Jha, Hamish Ivison, Ian Magnusson, Yizhong Wang, Shane Arora, David Atkinson, Russell Authur, Khyathi Raghavi Chandu, Arman Cohan, Jennifer Dumas, Yanai Elazar, Yuling Gu, Jack Hessel, Tushar Khot, William Merrill, Jacob Morrison, Niklas Muennighoff, Aakanksha Naik, Crystal Nam, Matthew E. Peters, Valentina Pyatkin, Abhilasha Ravichander, Dustin Schwenk, Saurabh Shah, Will Smith, Emma Strubell, Nishant Subramani, Mitchell Workman, Pradeep Dasigi, Nathan Lambert, Kyle Richardson, Luke Zettlemoyer, Jesse Dodge, Kyle Lo, Luca Soldaini, Noah A. Smith, and Hannaneh Hajishirzi. 2024. OLMo: Accelerating the Science of Language Models. arXiv:2402.00838 [cs.CL]
- [9] Daphne Ippolito, Ann Yuan, Andy Coenen, and Sehmom Burnam. 2022. Creative Writing with an AI-Powered Writing Assistant: Perspectives from Professional Writers. arXiv:2211.05030 [cs.HC]
- [10] Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, Léo Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2023. Mistral 7B. arXiv:2310.06825 [cs.CL]
- [11] Jialun Aaron Jiang, Kandrea Wade, Casey Fiesler, and Jed R. Brubaker. 2021. Supporting Serendipity: Opportunities and Challenges for Human-AI Collaboration in Qualitative Analysis. *Proceedings of the ACM on Human-Computer Interaction* 5, CSCW1 (April 2021), 1–23. <https://doi.org/10.1145/3449168>
- [12] Andrew Katz, Siqing Wei, Gaurav Nanda, Christopher G. Brinton, and Matthew W. Ohland. 2023. Exploring the Efficacy of ChatGPT in Analyzing Student Teamwork Feedback with an Existing Taxonomy. *ArXiv abs/2305.11882* (2023). <https://api.semanticscholar.org/CorpusID:258832611>
- [13] Yiheng Liu, Hao He, Tianle Han, Xu Zhang, Mengyuan Liu, Jiaming Tian, Yutong Zhang, Jiaqi Wang, Xiaohui Gao, Tianyang Zhong, Yi Pan, Shaochen Xu, Zihao Wu, Zhengliang Liu, Xin Zhang, Shu Zhang, Xintao Hu, Tuo Zhang, Ning Qiang, Tianming Liu, and Bao Ge. 2024. Understanding LLMs: A Comprehensive Overview from Training to Inference. arXiv:2401.02038 [cs.CL]
- [14] Piotr Wojciech Mirowski, Kory Wallace Mathewson, Jaylen J. Pittman, and Richard Evans. 2022. Co-Writing Screenplays and Theatre Scripts with Language Models: Evaluation by Industry Professionals. *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems* (2022). <https://api.semanticscholar.org/CorpusID:252596159>
- [15] Robert C. Nickerson, Upkar Varshney, and Jan Muntermann. 2013. A method for taxonomy development and its application in information systems. *European Journal of Information Systems* 22 (2013), 336–359. <https://api.semanticscholar.org/CorpusID:34927311>
- [16] Bhargavi Paranjape, Scott Lundberg, Sameer Singh, Hannaneh Hajishirzi, Luke Zettlemoyer, and Marco Tulio Ribeiro. 2023. ART: Automatic multi-step reasoning and tool-use for large language models. arXiv:2303.09014 [cs.CL]
- [17] Vipul Raheja, Dhruv Kumar, Ryan Koo, and Dongyeop Kang. 2023. CoEdIT: Text Editing by Task-Specific Instruction Tuning. arXiv:2305.09857 [cs.CL]
- [18] William Saunders, Catherine Yeh, Jeff Wu, Steven Bills, Ouyang Long, Jonathan Ward, and Jan Leike. 2022. Self-critiquing models for assisting human evaluators. *ArXiv abs/2206.05802* (2022). <https://api.semanticscholar.org/CorpusID:249626555>

³<https://www.upwork.com/>

- [19] Timo Schick, Jane Dwivedi-Yu, Zhengbao Jiang, Fabio Petroni, Patrick Lewis, Gautier Izacard, Qingfei You, Christoforos Nalmpantis, Edouard Grave, and Sebastian Riedel. 2022. PEER: A Collaborative Language Model. arXiv:2208.11663 [cs.CL]
- [20] Chirag Shah, Ryan W. White, Reid Andersen, Georg Buscher, Scott Counts, Sarkar Snigdha Sarathi Das, Ali Montazer, Sathish Manivannan, Jennifer Neville, Xiaochuan Ni, Nagu Rangan, Tara Safavi, Siddharth Suri, Mengting Wan, Leijie Wang, and Longqi Yang. 2024. Using Large Language Models to Generate, Validate, and Apply User Intent Taxonomies. arXiv:2309.13063 [cs.IR]
- [21] Writer Engineering team. 2023. Palmyra-base Parameter Autoregressive Language Model. <https://dev.writer.com>.
- [22] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. Llama 2: Open Foundation and Fine-Tuned Chat Models. arXiv:2307.09288 [cs.CL]
- [23] Tianlu Wang, Ping Yu, Xiaoqing Ellen Tan, Sean O'Brien, Ramakanth Pasunuru, Jane Dwivedi-Yu, Olga Golovneva, Luke Zettlemoyer, Maryam Fazel-Zarandi, and Asli Celikyilmaz. 2023. Shepherd: A Critic for Language Model Generation. arXiv:2308.04592 [cs.CL]
- [24] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. 2023. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. arXiv:2201.11903 [cs.CL]
- [25] Sean Welleck, Ximing Lu, Peter West, Faeze Brahman, Tianxiao Shen, Daniel Khashabi, and Yejin Choi. 2022. Generating Sequences by Learning to Self-Correct. ArXiv abs/2211.00053 (2022). <https://api.semanticscholar.org/CorpusID:253244506>
- [26] Ziang Xiao, Xingdi Yuan, Qingzi Vera Liao, Rania Abdelghani, and Pierre-Yves Oudeyer. 2023. Supporting Qualitative Analysis with Large Language Models: Combining Codebook with GPT-3 for Deductive Coding. *Companion Proceedings of the 28th International Conference on Intelligent User Interfaces (2023)*. <https://api.semanticscholar.org/CorpusID:257758261>
- [27] Lixiang Yan, Vanessa Echeverria, Gloria Fernandez Nieto, Yueqiao Jin, Zachari Swiecki, Linxuan Zhao, Dragan Gašević, and Roberto Martinez-Maldonado. 2023. Human-AI Collaboration in Thematic Analysis using ChatGPT: A User Study and Design Recommendations. arXiv:2311.03999 [cs.HC]
- [28] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. 2023. ReAct: Synergizing Reasoning and Acting in Language Models. arXiv:2210.03629 [cs.CL]
- [29] He Zhang, Chuhan Wu, Jingyi Xie, Yao Lyu, Jie Cai, and John Millar Carroll. 2023. Redefining Qualitative Analysis in the AI Era: Utilizing ChatGPT for Efficient Thematic Analysis. ArXiv abs/2309.10771 (2023). <https://api.semanticscholar.org/CorpusID:262053818>

A MORE ABOUT FORMATIVE STUDY

A.1 Recruitment Process

We recruited 2 industry professionals (referred to as P1 and P2) via the U.S.-based freelancing platform ‘Upwork.’ Note that the study was approved by the Institutional Review Board of the first author’s institution. When recruiting the participants, we set the eligibility of participation as follows: (1) at least 3 years of working experience in their business sector; (2) fluent in English (Native Speaker Preferred); and (3) prior experience in several business-specific writing tasks such as email, proposals, and meeting minutes. In addition to meeting the three requirements, we also asked the applicants to answer the screening question: “Please describe your level of experience in your work group, including specific project details.” Based on the manual review of the responses, we invited the two participants (P1 and P2) who met all the requirements of our study. After the successful completion of the study, the participants

received a compensation of 20 USD for their participation in a 1-hour duration of our formative study. Table 1 shows the detailed background of the study participants we recruited.

A.2 Experiment Procedures

The formative study involved three steps. First, the participant provided their background information: (1) last name (for data file identifier purposes only); (2) domain group; (3) the type of writing task (e.g., meeting minutes, emails, and project proposals); and (4) the content of the writing in fully complete English sentences. Based on these user inputs, the GPT-4 integrated into the interface generated a writing template. When the generated writing was present, the participants were asked to revise the writing and to click the button to store all the revisions securely.

Next, the participants were prompted to move to the next page of the interface, where their revisions were visualized with the additions in red and the deletions in strikethrough. This page was prepared to let the participants check whether their revisions were properly stored and visualized; if not, we asked them to go back to the previous step and provide revisions again.

Lastly, after they confirmed that their revisions were successfully stored and visualized, we let the participants move to the last page of the interface. Here, they were given a list of instructions on how to annotate their sentence-level edits with the provided types of revision intentions that were established by a previous work [3]. After they completed the annotation of every edit they made in the GPT-4 generated writing, they were asked to leave the interface by closing the tab of the interface in their local search engine (e.g., Chrome, Safari). Our interface was developed to store all information produced during the study into our password-protected server - (1) revision history with the annotations; (2) the original GPT-4 writing; and (3) the user inputs. Please note that we used the last name information only for data identifier purposes (i.e., renaming the data file with the last name) and did not collect or use any personally identifiable information during the study.

A.3 Interface Development

We used Streamlit and Python to develop a web interface for the formative study process. Then, we made the web interface publicly accessible by hosting it on a website using ngrok. This enabled the participants to access the interface using their local search engine. The code repository is available at the following GitHub repository: <https://github.com/minnesotanlp/co-taxonomy>. Figure 3 is a screenshot of the interface shown to the participants for the first step described in Appendix A.2.

B INITIAL RESULTS

We have conducted empirical testing of our human-AI collaborative taxonomy construction process, partially executing STEP 1 and 2 using a simplified scenario focused on developing a taxonomy of text revision intentions, specifically for email writing within the legal domain.

Table 2 showcases an example of the generated taxonomy elements across all levels, featuring descriptions and examples pertinent to the legal domain, ensuring clarity and relevance. During STEP 2, the ‘Interviewer LLM’ engaged one of the authors, posing

	GENDER	RESIDENCE	WORKING DOMAIN	YEARS OF EXPERIENCE	ENGLISH PROFICIENCY	DISABILITY STATUS
P1	Male	United States	Human Resources (HR)	14	Native	No
P2	Female	United States	Marketing	8	Native	No

Table 1: Detailed background information of the formative study participants.

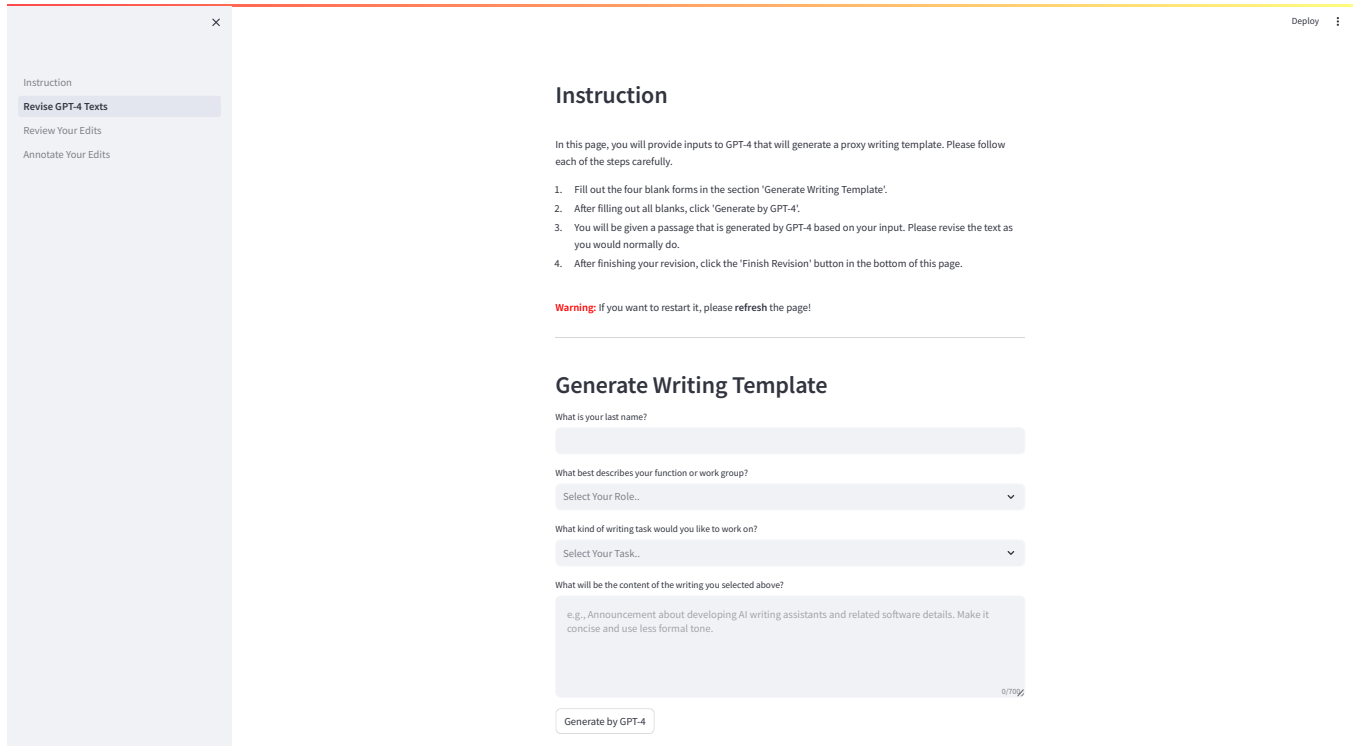


Figure 3: The interface for the first step, where a participant provided their background information that GPT-4 then used to generate a writing template.

the question: “What do you think can be added as an additional *description* category if not comprehensive?”. Upon the author’s suggestion to include provisions for addressing counterarguments in legal arguments, the Interviewer LLM proposed the addition of a “Addressing Counterarguments” category, along with a rationale emphasizing proactive identification of potential weaknesses or counterarguments to legal positions. Although these results are pending expert validation, they signify the promise of our approach. We plan to further validate this methodology through larger-scale experiments and incorporate advanced multi-step prompting techniques such as REACT [28] or ART [16].

B.1 Hierarchical Prompt Design (STEP 1)

We present the designed prompts for GPT-4 to generate all levels of taxonomy (according to STEP 1), using a hierarchical prompt chaining technique inspired by Mirowski et al. [14], Wei et al. [24]. Listing 1 present the prompt for the ‘Intention’ category generation.

B.2 Questions for Interviewer LLM (STEP 2)

For the dialogue-based validation during STEP 2, we brainstormed several questions for ‘Interviewer LLM’ to check the following aspects of the ‘Description’ of the taxonomy. These aspects were partially drawn from Shah et al. [20] that suggested some evaluation criteria for the LLM-generated taxonomy of user intents in the information retrieval (IR) domain.

- Consistency: “Do all descriptions for label not overlap in the meaning? If not, which description seems ambiguous/duplicate?”
- Clarity: “Do the descriptions provide clear understanding? If not, which one is unclear and how should it be improved?”
- Practicality: “Is there any description that is not typically considered in your domain? Which one?”
- Comprehensiveness: “What do you think can be added as an additional *description* category if not comprehensive?”

Intention	Description	Examples
<i>Legal Argument Strengthening</i>	Adding supporting legal precedents to reinforce an argument.	The case we are handling has similarities with other cases. → The case we are handling is similar to Smith v. Jones, where the court held a comparable view on contractual obligations. Our argument in this lawsuit is strong. → Our argument, bolstered by the precedent set in Brown v. Board of Education, is particularly strong in advocating for equal rights.
	Integrating additional factual evidence to solidify a legal stance.	Our client's position in this matter is legally sound. → Our client's position is legally sound, supported by the financial records and witness statements provided. This case is straightforward. → This case is straightforward, as evidenced by the detailed timeline of events and corroborating emails.
	Enhancing the persuasiveness of the argument by refining logical reasoning.	We believe our client is not liable. → Our client is not liable, as logically, the responsibility falls on the contractor, given the terms of the agreement. This case should be dismissed. → This case should be dismissed, considering the lack of causation between our client's actions and the alleged damages
	Incorporating expert testimony to bolster legal claims.	Our stance on the patent infringement is valid. → Our stance is strengthened by the expert testimony of Dr. Smith, a renowned patent specialist. The damages claimed are excessive. → The damages claimed are excessive, as per the assessment of leading industry expert John Doe.

Table 2: An example of the GPT-4 generated taxonomy of text revision for legal domain, through STEP 1. The proposed revisions by the model are indicated by the arrows.

```
f'''
You're a helpful assistant helping a user generate the labels of edit intentions in their writing task of {email}.
The user is a business professional in the following domain: {legal domain}.

### Output Guidelines:

- Suppose that the user revises their original text of {email} for better communications within their domain group (e.g., a marketing person for
↳ other team members in the marketing team; an HR worker writing for the HR team, etc.)
- Please consider intentions of revising contents, specifically for the domain of {legal}.
- In addition to domain-specific content-related taxonomy, include general syntactic revision intentions, such as grammar corrections, style
↳ coherency, clarity, etc.
- Please generate labels of feasible scenarios as much as you can. It should be more than 10 labels at least.
- For each generated intention, prepend the token <label> and append </label>.
- Please consider that all those generated labels must be mutually exclusive (e.g., no overlapping between labels).
- Please consider that all those generated labels must be collectively exhaustive (e.g., cover every possible case of revision intentions in
↳ practice).
- Once you finish generating all possible labels of revision intention of {email} for the domain of {legal}, end your response with the tag
↳ <end>.

### Example

Given the domain of marketing and the writing task of email, the example looks as follows:

...
<label> Target Engagement </label>
<label> Visual Content Integration </label>
<label> Data-Driven Insights Presentation </label>
...
<end>
...

### Output
'''
```

Listing 1: A prompt for GPT-4 to generate the 'Intention' category.