

AdaBridge: Dynamic Data and Computation Reuse for Efficient Multi-task DNN Co-evolution in Edge Systems

Lehao Wang¹, Zhiwen Yu^{1,2}, Sicong Liu¹, Chenshu Wu³, Xiangrui Xu¹, Bin Guo¹

¹Northwestern Polytechnical University, ²Harbin Engineering University, ³The University of Hong Kong

Abstract

Running multi-task DNNs on mobiles is an emerging trend for various applications like autonomous driving and mobile NLP. Mobile DNNs are often compressed to fit the limited resources and thus suffer from degraded accuracy and generalizability due to data drift. DNN evolution, *e.g.*, continuous learning and domain adaptation, has been demonstrated effective in overcoming these issues, mostly for single-task DNN, leaving multi-task DNN evolution an important yet open challenge. To fill up this gap, we propose AdaBridge, which exploits computational redundancies in multi-task DNNs as a unique opportunity for dynamic data and computation reuse, thereby improving training efficacy and resource efficiency among asynchronous multi-task co-evolution in edge systems. Experimental evaluation shows that AdaBridge achieves 11% average accuracy gain upon individual evolution baselines.

1 Introduction

Deploying multi-task DNNs on diverse mobile devices enhances the efficient handling of various user interactions, resulting in a seamless and intelligent experience. For instance, smartphones or tablets can engage with a virtual assistant offering a range of services. However, due to limited memory and computation resources, mobile DNNs are typically compressed, impacting their generalization and making them susceptible to data drift [1], leading to a drop in agnostic accuracy. To address this, several approaches for DNN evolution have been explored, including continuous learning, online learning, and source-dependent/free domain adaptation with cloud or edge assistance. Edge-assisted continuous DNN evolution refines the mobile DNN with real-time sensor data on the mobile client, under the guidance of a global model at the edge server. This approach yields benefits such as increased accuracy, additional resources, and reduced latency.

However, either individual or multi-task DNN evolution methods struggle to balance evolution accuracy and efficiency in resource-constrained edge systems. Applying them to *multi-task* cases poses the following challenges:

- Each mobile client relying solely on local sensor data can impact evolution generalization, especially when the data doesn't satisfy the assumption of independent and identically distributed (IID) or is imbalanced. Despite local DNN, our key insight is that the sensor data from each mobile client has the potential to enhance the evolution accuracy of DNNs on other clients. However, uploading all client sensor data introduces transmission overhead and complicates edge-evolution training. Moreover, re-sampling suitable sensor data across multiple mobile models, especially in the absence of DNNs or data distribution of other tasks, remains a significant challenge.
- It is challenging to achieve efficient co-evolution of multiple asynchronous tasks with limited edge memory and computing resources. We note computational similarities and redundancies in retraining models from different clients, serving as both *burdens* and *opportunities* for data and computation reuse. The dynamic nature of asynchronous multi-task evolution requests makes these redundancies and opportunities constantly changing. Also, balancing the urgency and resource demands of multiple tasks complicates achieving average high accuracy, low-cost, and flexible co-evolution of them.

These challenges motivate the design of AdaBridge. As far as we know, it is the first work to adaptively bridge dynamic data and computation reuse across algorithm and system co-designed levels. It can simultaneously improve training efficacy and resource efficiency among asynchronous multi-task co-evolution in edge systems.

2 AdaBridge Design

As shown in Figure 1, Core components of AdaBridge include a *reuse-friendly mobile sensor data resampling* module and an *asynchronous multi-task retraining computation scheduling* module. We present the detailed module design as follows.

Reuse-friendly mobile sensor data resampling. It is non-trivial for mobile ends to dynamically resample locally sensed

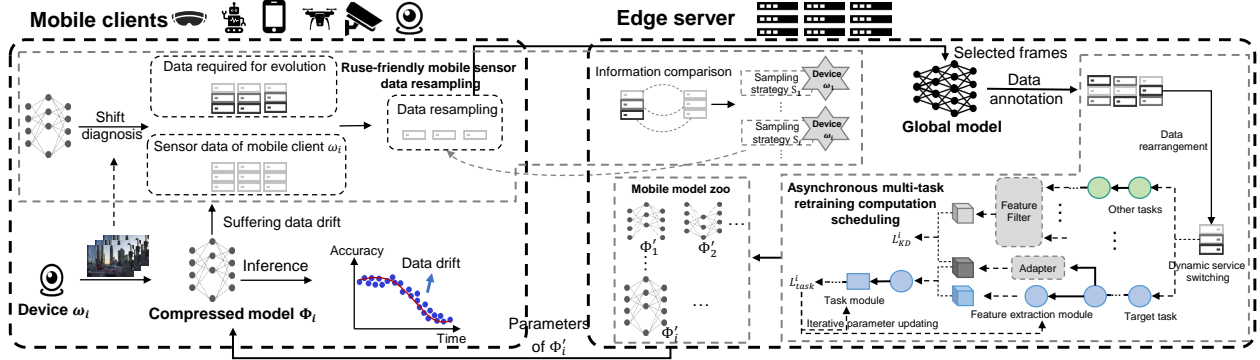


Figure 1: Illustration of AdaBridge’s system workflow.

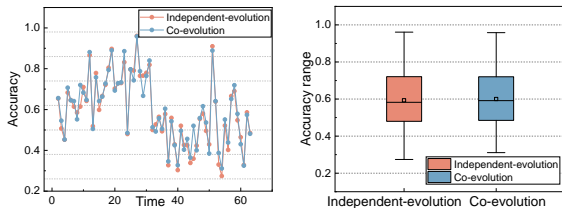


Figure 2: Comparison of accuracy fluctuation.

data useful for the evolution of not only themselves but also other client DNNs. The reasons are two-fold: *i)* prior research faces difficulties in rapidly evaluating the *explicit data contribution* for accuracy gain of local DNNs with new, unlabeled sensor data *before actual training execution*. This problem is more complex when predicting *implicit data contribution* for accuracy gains for DNN evolution on other clients that are locally inaccessible. Achieving accurate and real-time profiling is challenging, *ii)* in the absence of distribution of sensor data from other clients, determining the *implicit complementarity* between local data and other clients’ data is intricate. Therefore, mobile clients first conduct data shift type analysis based on runtime accuracy profiling for multi-task DNNs, and then generate the $X \rightarrow Y$ mapping function of other DNNs for data distribution comparison and resampling.

Asynchronous multi-task retraining computation scheduling. Upon receiving data from mobile devices, the edge server faces challenges in improving data reuse for multitask training, computation scheduling, and resource allocation. We propose the following design: **i) Plug-and-Play Asynchronous Multi-task Computation Reusing:** To achieve data reuse and accommodate flexible model retraining fusion and separation, we introduce an adapter-based multi-task learning framework. It asynchronously reuses learned features from different subtasks and incorporates dynamic switching and incremental parameter updating to optimize the limited representation capacity of compressed mobile DNNs. **ii) Memory I/O Cost-aware Underlying Computation Reuse:** To further enhance I/O efficiency in computation reuse, AdaBridge reorganizes data before training. It reuses nearby features with high similarity, reducing the frequency of reads and writes to

high-level memory and decreasing computational loads.

3 Experiment

We have conducted a preliminary experiment in this section. **Experimental settings.** We adopt two vehicles as mobile clients, *i.e.*, mobile unmanned cars (A), and unmanned aerial vehicles (UAV) (B), and deploy compressed Faster-RCNN with ResNet50 on them, respectively. Two NVIDIA GeForce RTX3080 GPUs with 10GB memory serve as the edge server. And they capture live video while riding on open roads.

Deployment and results. We compare the evolution performance of independent evolution with local data and AdaBridge’s co-evolution with data reuse. Figure. 2 shows the results. AdaBridge performs better when facing data drift with 11% improvement in lowest accuracy. This is because the co-evolved DNN has better generalization ability. The co-evolved DNN outputted by AdaBridge is stable in accuracy, contributing to the high flexibility and separability.

4 Conclusion

This paper presents AdaBridge, an end-to-end multi-task DNN co-evolution system designed for resource-constrained edge systems. By establishing a flexible adaptive reuse bridge between multiple tasks, the system efficiently handles the continuous evolution requests of asynchronous mobile DNNs with limited resources, aiming to overcome data drift.

References

[1] Romil Bhardwaj, Zhengxu Xia, Ganesh Ananthanarayanan, Junchen Jiang, Yuanchao Shu, Nikolaos Karianakis, Kevin Hsieh, Paramvir Bahl, and Ion Stoica. Ekya: Continuous learning of video analytics models on edge compute servers. In Proceedings of NSDI, pages 119–135, 2022.