

# The Solution for the 5th GCAIAC Zero-shot Referring Expression Comprehension Challenge

Longfei Huang<sup>1</sup>, Feng Yu<sup>1</sup>, Zhihao Guan<sup>1</sup>, Zhonghua Wan<sup>1</sup>, Yang Yang<sup>1</sup>  
<sup>1</sup> Nanjing University of Science and Technology

## ABSTRACT

This report presents a solution for the zero-shot referring expression comprehension task. Visual-language multimodal base models (such as CLIP, SAM) have gained significant attention in recent years as a cornerstone of mainstream research. One of the key applications of multimodal base models lies in their ability to generalize to zero-shot downstream tasks. Unlike traditional referring expression comprehension, zero-shot referring expression comprehension aims to apply pre-trained visual-language models directly to the task without specific training. Recent studies have enhanced the zero-shot performance of multimodal base models in referring expression comprehension tasks by introducing visual prompts. To address the zero-shot referring expression comprehension challenge, we introduced a combination of visual prompts and considered the influence of textual prompts, employing joint prediction tailored to the data characteristics. Ultimately, our approach achieved accuracy rates of 84.825 on the A leaderboard and 71.460 on the B leaderboard, securing the first position.

## CCS CONCEPTS

• **Computing methodologies** → **Zero-shot Referring Expression Comprehension**.

## KEYWORDS

Large-scale Vision Language Models; Zero-shot Referring Expression Comprehension; Prompt Engineering

## ACM Reference Format:

Longfei Huang<sup>1</sup>, Feng Yu<sup>1</sup>, Zhihao Guan<sup>1</sup>, Zhonghua Wan<sup>1</sup>, Yang Yang<sup>1</sup> and <sup>1</sup> Nanjing University of Science and Technology, . 2024. The Solution for the 5th GCAIAC Zero-shot Referring Expression Comprehension Challenge. In *Proceedings of the 32nd ACM International Conference on Multimedia (MM '24)* / *Proceedings of the 32nd ACM International Conference on Multimedia (MM'24)*, October 28–November 1, 2024, Melbourne, Australia. ACM, New York, NY, USA, 4 pages. <https://doi.org/XXXXXXX.XXXXXXX>

## 1 INTRODUCTION

With the advancement and application of multimodal research [15, 17, 19–21], large-scale Vision-Language Models (VLMs) have demonstrated remarkable capabilities in visual-related tasks and applications [1, 11]. Leveraging abundant data and extensive model


Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

MM '24, 28 October - 1 November 2024, Melbourne, Australia

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-1-4503-XXXX-X/18/06

<https://doi.org/XXXXXXX.XXXXXXX>

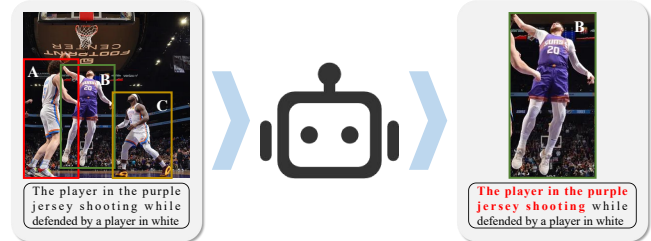

**Figure 1: Referring Expression Comprehension aims to locate the position of a specific object in an image based on a provided textual description, such as accurately locating the proposal of the player in a purple jersey shooting skillfully in the image.**

capacity, these models exhibit the potential for transfer to various downstream tasks, including visual grounding [25], image generation [8], and visual reasoning [26]. Typically, VLMs require additional data for fine-tuning to adapt to specific downstream tasks. However, further research is needed to explore directly utilizing pre-trained VLMs for their intrinsic abilities in visual-textual comprehension within downstream tasks.

Zero-shot Referring Expression Comprehension tasks [12–14] aim to leverage existing large-scale multimodal models, such as CLIP [9]. However, these foundational multimodal models are insensitive to precise spatial relationships like object localization [13]. Achieving high-performance zero-shot referring expression comprehension (REC) tasks involves designing effective visual prompts and other reasoning strategies. REC tasks involve locating target objects in images based on linguistic descriptions, as illustrated in Figure 1.

[12] indicates that Visual Language Models (VLMs) may inherently possess the capability to comprehend local objects within entire images. Therefore, specially designed visual prompts have the potential to explicitly invoke this ability of VLMs, thereby benefiting various tasks. Visual prompts employ distinct markers (such as boxes or circles) placed over relevant regions in images to effectively guide the attention of VLMs. Currently, many studies are leveraging this capability by designing a variety of unique visual prompts to ensure that models focus on highlighted relevant information while retaining the overall contextual details of the image.

However, existing methods [12–14] predominantly focus on designing fine-grained visual prompts to activate VLMs’ ability to understand object spatial localization, while neglecting the impact of coarse-grained visual enhancements and textual factors. To address this issue and maximize the zero-shot performance of multimodal large-scale models while considering their reasoning capabilities, we propose a strategy involving visual prompt combinations and

text redundancy reduction operations. Additionally, we introduce a method for joint prediction tailored to the characteristics of the data.

## 2 RELATED WORK

### 2.1 Vision-Language Models

Large-scale language models (LLMs) can solve complex problems with minimal data through fine-tuning and exhibit remarkable zero-shot transferability [11]. In recent years, with the advancement and application of multimodal models [16, 18, 21–23], Vision-Language Models (VLMs) trained on image-text data sourced from the web have shown outstanding performance in computer vision (CV) tasks, demonstrating commendable zero-shot capabilities [9]. Models like CLIP [9] and UNITER [3], trained via contrastive learning, have excelled in tasks such as image classification. However, instance-level tasks such as referring expression comprehension often require adjustments to existing methods in visual and textual encoders, as well as image grounding techniques. In contrast, this paper proposes a zero-shot architecture for instance-level tasks using pre-trained VLMs.

### 2.2 Prompt Engineering

Prompt engineering significantly enhances the emerging capabilities of LLMs in natural language processing. Common types of prompt inputs primarily involve adding pre-designed fixed prompts or a set of learnable tokens at the beginning of textual inputs [6, 7]. Prompting has since expanded to include open vocabulary detection and segmentation. While language prompting has been extensively explored, visual prompting has received less attention. Early research utilized visual prompts to adapt VLMs. Recently, [14] achieved fine-grained visual prompting through the SAM model [5], enhancing the performance of the CLIP model [9].

However, existing methods [12–14] have predominantly considered visual prompting at a fine-grained level, overlooking the respective strengths and weaknesses of coarse-grained and fine-grained approaches. They have not addressed the synergy between coarse and fine-grained visual enhancements nor the role of textual prompts. Therefore, we propose a method involving visual prompt combinations and text redundancy reduction.

### 2.3 Referring Expression Comprehension

Referring Expression Comprehension (REC) tasks [2] involve locating the bounding box of a target object in an image based on linguistic descriptions. Mainstream REC methods can generally be categorized into two types: proposal-based methods and proposal-free methods. Proposal-based methods utilize object detectors (such as Mask R-CNN [10]) to detect instance regions, which are then cropped and used for subsequent classification. Proposal-free methods (e.g., MDETR [4]) involve end-to-end training of vision-language models. Recently, zero-shot approaches have integrated proposal boxes from MAttNet [24] with Vision-Language models for tasks like image caption matching.

## 3 METHOD

Our approach consists of three main components: visual prompts, text redundancy reduction, and joint prediction. The main framework of our method is illustrated in Figure 2.

### 3.1 Visual Prompt

In terms of visual prompts, we categorize them into coarse-grained and fine-grained types, as illustrated in Figure 3. We explore various visual prompt configurations. Unlike approaches focusing exclusively on fine-grained visual prompts, we utilize a combination of coarse-grained and fine-grained visual prompts. This approach ensures that the model maintains detection performance for fine-grained objects while considering spatial relationships among targets, thereby further activating the VLM’s visual-language comprehension abilities. Through experiments, we determined that the optimal visual prompt combination is C1, C3, C4, F1, F2, F3.

### 3.2 Removing Redundant Text

We draw inspiration from NLP techniques for removing redundant text content to enhance the visual-language comprehension capabilities of CLIP. By eliminating redundant portions of text prompts within CLIP, we aim to improve its performance in image-text matching tasks. Adding a formatted prompt like "a photo of" before text inputs have been shown to effectively enhance CLIP’s performance, but these added prompts themselves do not contribute meaningful information and are considered redundant for the textual context. By performing redundancy reduction operations, we further boost CLIP’s effectiveness.

This approach is akin to the Subtraction method proposed by RedCircle [12]. Subtraction leverages a large volume of negative sample text to identify noise within texts. By removing this noise from positive samples, interference is reduced, thus improving model performance. However, Subtraction requires extensive negative sample texts, making it computationally intensive. Moreover, similarities in semantic content between negative and positive samples may lead to performance degradation if improperly managed, rendering the denoising effect uncontrollable.

In contrast, our text redundancy reduction method employs a more direct approach, akin to hard denoising. It removes overtly noisy prompt words from the text while preserving original information. This significantly reduces computational overhead while offering greater control over denoising effects compared to soft denoising methods like Subtraction. Experimental results demonstrate that our approach achieves superior performance.

### 3.3 Joint Prediction

To address the strong prior knowledge where each image corresponds to multiple entries, with each entry containing several textual descriptions pointing to the same bounding box, and different entries pointing to different bounding boxes within the same image, we propose a method called joint prediction.

For different descriptions within the same entry, we aggregate all prediction results and use them as a collective prediction for all descriptions. For different entries within the same image, we employ the Hungarian algorithm to find the optimal solution, ensuring distinct predictions for different entries.

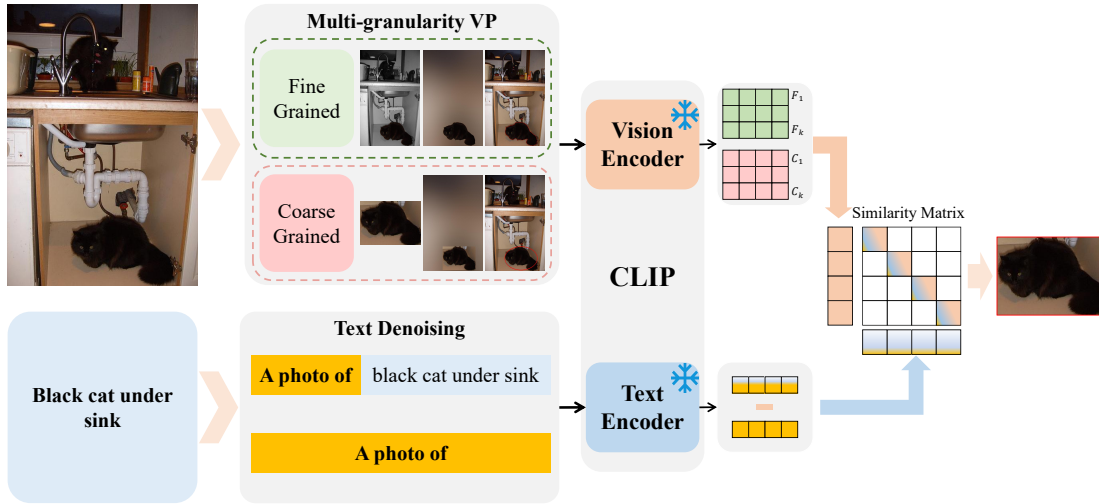


Figure 2: Overall Architecture. We use visual prompts to mark regions of interest in images and simultaneously process textual content to enhance the visual-language comprehension capabilities of multimodal models.

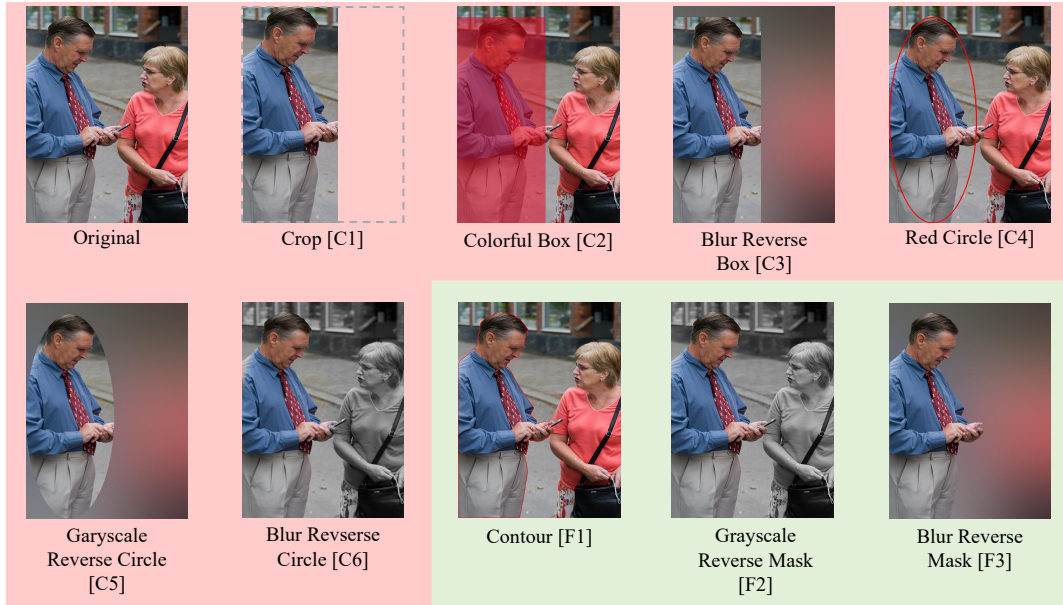


Figure 3: A summary of the multi-granularity vision prompts used in this paper with the caption "man on left". Note that vision prompts highlighted in pink represent coarse-grained vision prompts, while those highlighted in green represent fine-grained vision prompts. The main difference between coarse-grained and fine-grained vision prompt is the use of SAM to segment objects within the proposal, followed by employing box or circle-based methods to highlight or mask the target object.

## 4 EXPERIMENTS

### 4.1 Experiments Setup

**Dataset and Model.** In the zero-shot setting, inference is conducted solely on the official test set provided, without any training data available. The model exclusively uses the CLIP model for inference and is augmented with the SAM model to assist in inference tasks.

**Implementation Details.** We utilize the CLIP trained by OpenAI, namely ViT-B/32 and RN50×16 backbones. For the fine-grained

visual prompt, we employ SAM-ViT-H, a variant of Segment Anything Model. All experiments are conducted on a single RTX 3090 GPU. More implementation details are presented in the supplementary materials. Redcircle has a line thickness of 6 pixels, while the target outline has a thickness of 2 pixels. The image is padded using gray color (100, 100, 100), and Gaussian blur is applied with a standard deviation of 100. The candidate box is constrained to be greater than or equal to 0.05 of the image area.

## 4.2 Main Results

Our method achieved an accuracy of 72.968 on the offline test set, 84.825 on the A leaderboard, and 71.46 on the B leaderboard. The ablation results of our method on the offline test are shown in Table 1. Experimental results indicate that our approach, combining visual prompt combinations and text redundancy reduction, effectively enhances CLIP’s visual-language comprehension capabilities.

#	Method	ACC
1	ReCLIP	46.79
2	+visual prompt	53.069
3	+removing redundant	60.846
4	+parameter tuning	63.389
5	+joint prediction	72.968

**Table 1: Ablation experiments.**

## 5 CONCLUSION

In this paper, we enhance the visual-language comprehension of Vision-Language Models (VLMs) at the visual level by employing a combination of visual prompt methods, incorporating finer-grained prompts using the SAM model alongside coarse-grained prompts. Additionally, we improve the performance of the CLIP model by optimizing textual prompts through redundancy reduction, which proves more efficient and effective compared to prevalent negative sample denoising methods. Furthermore, we optimize predictions through joint prediction to further enhance model performance. Experimental results demonstrate that our approach significantly enhances the visual-language comprehension capabilities of multi-modal base models and exhibits robustness.

## REFERENCES

- [1] Benjamin Bowman, Alessandro Achille, Luca Zancato, Matthew Trager, Pramuditha Perera, Giovanni Paolini, and Stefano Soatto. 2023. À-la-carte Prompt Tuning (APT): Combining Distinct Data Via Composable Prompting. In *CVPR*. IEEE, 14984–14993.
- [2] Meng Cao, Ji Jiang, Long Chen, and Yuexian Zou. 2022. Correspondence Matters for Video Referring Expression Comprehension. In *MM '22: The 30th ACM International Conference on Multimedia, Lisboa, Portugal, October 10 - 14, 2022*. ACM, 4967–4976.
- [3] Yen-Chun Chen, Linjie Li, Licheng Yu, Ahmed El Kholy, Faisal Ahmed, Zhe Gan, Yu Cheng, and Jingjing Liu. 2020. UNITER: UNiversal Image-Text Representation Learning. In *ECCV (Lecture Notes in Computer Science, Vol. 12375)*. Springer, 104–120.
- [4] Aishwarya Kamath, Mannat Singh, Yann LeCun, Gabriel Synnaeve, Ishan Misra, and Nicolas Carion. 2021. MDETR - Modulated Detection for End-to-End Multi-Modal Understanding. In *ICCV*. IEEE, 1760–1770.
- [5] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollar, and Ross Girshick. 2023. Segment Anything. In *ICCV*. 4015–4026.
- [6] Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2022. Large Language Models are Zero-Shot Reasoners. In *NeurIPS*.
- [7] Lin Li, Haoyan Guan, Jianing Qiu, and Michael Spratling. 2024. One Prompt Word is Enough to Boost Adversarial Robustness for Pre-trained Vision-Language Models. In *CVPR*. 24408–24419.
- [8] Yuheng Li, Haotian Liu, Qingyang Wu, Fangzhou Mu, Jianwei Yang, Jianfeng Gao, Chunyuan Li, and Yong Jae Lee. 2023. GLIGEN: Open-Set Grounded Text-to-Image Generation. In *CVPR*. IEEE, 22511–22521.
- [9] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. 2021. Learning Transferable Visual Models From Natural Language Supervision. In *ICML (Proceedings of Machine Learning Research, Vol. 139)*. PMLR, 8748–8763.
- [10] Shaoqing Ren, Kaiming He, Ross B. Girshick, and Jian Sun. 2017. Faster R-CNN: Towards Real-Time Object Detection with Region Proposal Networks. *IEEE Trans. Pattern Anal. Mach. Intell.* 39, 6 (2017), 1137–1149.
- [11] Rylan Schaeffer, Brando Miranda, and Sanmi Koyejo. 2023. Are Emergent Abilities of Large Language Models a Mirage?. In *NeurIPS*.
- [12] Aleksandar Shtedritski, Christian Rupprecht, and Andrea Vedaldi. 2023. What does CLIP know about a red circle? Visual prompt engineering for VLMs. In *ICCV*. IEEE, 11953–11963.
- [13] Sanjay Subramanian, William Merrill, Trevor Darrell, Matt Gardner, Sameer Singh, and Anna Rohrbach. 2022. ReCLIP: A Strong Zero-Shot Baseline for Referring Expression Comprehension. In *ACL*. Association for Computational Linguistics, 5198–5215.
- [14] Lingfeng Yang, Yuezhe Wang, Xiang Li, Xinlong Wang, and Jian Yang. 2023. Fine-Grained Visual Prompting. In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*.
- [15] Yang Yang, Ran Bao, Weili Guo, De-Chuan Zhan, Yilong Yin, and Jian Yang. 2023. Deep visual-linguistic fusion network considering cross-modal inconsistency for rumor detection. *Sci. China Inf. Sci.* 66, 12 (2023).
- [16] Yang Yang, Zhao-Yang Fu, De-Chuan Zhan, Zhi-Bin Liu, and Yuan Jiang. 2021. Semi-Supervised Multi-Modal Multi-Instance Multi-Label Deep Network with Optimal Transport. *IEEE Trans. Knowl. Data Eng.* 33, 2 (2021), 696–709.
- [17] Yang Yang, Jinyi Guo, Guangyu Li, Lanyu Li, Wenjie Li, and Jian Yang. 2024. Alignment efficient image-sentence retrieval considering transferable cross-modal representation learning. *Frontiers Comput. Sci.* 18, 3 (2024), 181335.
- [18] Yang Yang, Ke-Tao Wang, De-Chuan Zhan, Hui Xiong, and Yuan Jiang. 2019. Comprehensive Semi-Supervised Multi-Modal Learning. In *IJCAI*. ijcai.org, 4092–4098.
- [19] Yang Yang, Hongchen Wei, Hengshu Zhu, Dianhai Yu, Hui Xiong, and Jian Yang. 2021. Exploiting Cross-Modal Prediction and Relation Consistency for Semi-Supervised Image Captioning. *CoRR* abs/2110.11767 (2021).
- [20] Yang Yang, Jia-Qi Yang, Ran Bao, De-Chuan Zhan, Hengshu Zhu, Xiaoru Gao, Hui Xiong, and Jian Yang. 2023. Corporate Relative Valuation Using Heterogeneous Multi-Modal Graph Neural Network. *IEEE Trans. Knowl. Data Eng.* 35, 1 (2023), 211–224.
- [21] Yang Yang, De-Chuan Zhan, Yi-Feng Wu, Zhi-Bin Liu, Hui Xiong, and Yuan Jiang. 2021. Semi-Supervised Multi-Modal Clustering and Classification with Incomplete Modalities. *IEEE Trans. Knowl. Data Eng.* 33, 2 (2021), 682–695.
- [22] Yang Yang, Chubing Zhang, Yi-Chu Xu, Dianhai Yu, De-Chuan Zhan, and Jian Yang. 2021. Rethinking Label-Wise Cross-Modal Retrieval from A Semantic Sharing Perspective. In *IJCAI*. ijcai.org, 3300–3306.
- [23] Yang Yang, Jingshuai Zhang, Fan Gao, Xiaoru Gao, and Hengshu Zhu. 2022. DOMFN: A Divergence-Orientated Multi-Modal Fusion Network for Resume Assessment. In *MM '22: The 30th ACM International Conference on Multimedia, Lisboa, Portugal, October 10 - 14, 2022*. ACM, 1612–1620.
- [24] Licheng Yu, Zhe Lin, Xiaohui Shen, Jimei Yang, Xin Lu, Mohit Bansal, and Tamara L. Berg. 2018. MAttNet: Modular Attention Network for Referring Expression Comprehension. In *CVPR*. Computer Vision Foundation / IEEE Computer Society, 1307–1315.
- [25] Alireza Zareian, Kevin Dela Rosa, Derek Hao Hu, and Shih-Fu Chang. 2021. Open-Vocabulary Object Detection Using Captions. In *IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2021, virtual, June 19-25, 2021*. Computer Vision Foundation / IEEE, 14393–14402.
- [26] Rowan Zellers, Yonatan Bisk, Ali Farhadi, and Yejin Choi. 2019. From Recognition to Cognition: Visual Commonsense Reasoning. In *CVPR*. Computer Vision Foundation / IEEE, 6720–6731.