# Enlarging Feature Support Overlap for Domain Generalization

Yaoyao Zhu<sup>1,2</sup>, Xiuding Cai<sup>1,2</sup>, Dong Miao<sup>1,2</sup>, Yu Yao<sup>1,2</sup>, and Zhongliang Fu<sup>1,2</sup>

- <sup>1</sup> Chengdu Institute of Computer Application, Chinese Academy of Sciences, Chengdu, China fzliang@casit.com.cn casitmed2022@163.com
- School of Computer Science and Technology, University of Chinese Academy of Sciences, Beijing, China {zhuyaoyao19, caixiuding20, miaodong20}@mails.ucas.ac.cn


#### Abstract.

Deep models often struggle with out-of-distribution (OOD) generalization, limiting their real-world applicability beyond controlled laboratory settings. Invariant risk minimization (IRM) addresses this issue by learning invariant features and minimizing the risk across different domains. Thus, it avoids the pitfalls of pseudo-invariant features and spurious causality associated with empirical risk minimization (ERM). However, according to the support overlap theorem, ERM and IRM may fail to address the OOD problem when pseudo-invariant features have insufficient support overlap. To this end, we propose a novel method to enlarge feature support overlap for domain generalization. Specifically, we introduce Bayesian random semantic data augmentation to increase sample diversity and overcome the deficiency of IRM. Experiments on several challenging OOD generalization benchmarks demonstrate that our approach surpasses existing models, delivering superior performance and robustness. The code is available at https://github.com/YaoyaoZhu19/BSDG.

**Keywords:** Domain Generalization  $\cdot$  Data Augmentation  $\cdot$  Invariant Risk Minimization

### 1 Introduction

Deep learning demonstrated powerful capabilities in computer vision tasks [17, 30]. However, deep models often perform poorly when applied to new, unseen domains [16]. This decline occurs because training machine learning models assume that the training and test sets are independently and identically distributed [43]. This assumption may break because real-world data distributions are dynamic and variable, known as out-of-distribution (OOD) [1]. For instance, in medical image analysis, models are often trained on data from a single hospital due to privacy and security concerns. This limitation causes the model to underperform in other hospital data imaging from different devices or techniques [11, 30]. Arjovsky et al. [4] noted that models mainly fail to generalize ODD because they capture spurious causal relationships in the training data. This issue significantly hinders the deployment of machine learning systems in real-world applications.

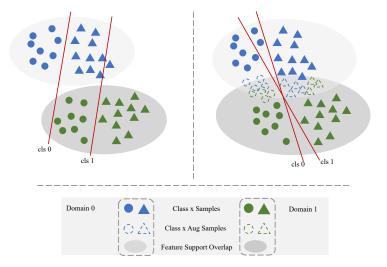

**Fig. 1:** An example of enlarging the feature support overlap for domain generalization. The left subfigure shows the situation when insufficient support overlap, resulting in a failed generalization regardless of which domain is used for modeling; the red line indicates the decision boundary. The right subfigure shows an example of successful generalization when sufficient support overlap.

Invariant Risk Minimization (IRM) [4] and its variants [1,10,23] stand for one of the most representative methods for domain generalization (DG). They compel models to learn features consistent across environments, avoiding the pitfalls of empirical risk minimization (ERM) [43], such as pseudo-invariant features and spurious causal relationships. Despite IRM's solid theoretical foundation, Ahuja et al. [1] noted that for linear classification tasks, if pseudo-invariant features insufficient support overlap, both ERM and IRM may fail to address the OOD problem. IB-IRM [1] addresses this issue using the information bottleneck, providing extensive theoretical proof. However, when dataset diversity is low, insufficient support overlap, resulting in generalization failure. The left subplot in Figure 1 shows how insufficient support overlap leads to generalization failure.

Other DG methods increase the diversity of training data through data augmentation (DA) [47,51] to enlarge the support overlap. MixStyle [53] generates new domain style samples by mixing the styles between different domains. Lee et al. [24] applied the Mixup technique in the frequency domain to augment the shape features. However, these methods still have limitations in increasing the diversity of samples, resulting in insufficient support overlap.

Deep features are typically linear [7, 42]. Thus, we can perform semantic transformation by changing features, such as changing the texture of the background or foreground [45]. These methods of changing features in latent space are called semantic data augmentation (SDA). They are computationally efficient and increases sample diversity. For example, deep feature interpolation can

change a person's age in an image or add a beard [42]. Li et al. [27] applying Gaussian noise to feature embeddings during training for DG. Wang et al. [44] proposed an SDA-based DG method to increase sample diversity between interclasses and inter-domains. However, these methods did not consider the range of augmented features, and over-augmentation may lead to label changing, which can impair model performance [2]. Meanwhile, these DA-based DG methods are optimized using ERM, which has the risk of learning pseudo-invariant features.

In short, the IRM series of DG methods may fail to generalize due to insufficient support overlap [1], and DA-based DG methods may introduce pseudo-invariant features. This paper proposes a novel method for domain generalization using SDA to enrich sample diversity and help IRM enlarge support overlap. In our previous work, we proposed Bayesian random semantic data augmentation (BSDA) [2] for medical image classification. BSDA defines a paradigm for SDA, including semantic direction and magnitude. To avoid label changes, BSDA uses variational inference to estimate the distribution of augmentable ranges, enabling semantic data augmentation and accurately enlarging support overlap. Although our method is simple, we experimentally demonstrated that introducing BSDA effectively overcomes the generalization failure of IRM due to insufficient support overlap. The main contributions of this paper are:

- We use the BSDA method to increase sample diversity and enlarge support overlap.
- We incorporate invariant risk minimization to avoid the model learning pseudo-invariant features.
- We conducted experiments on the Terra Incognita and FundusDG datasets.
   The results show that the proposed method outperforms current state-of-the-art methods.

#### 2 Related Work

### 2.1 Domain Generalization

Domain generalization aims to generalize effectively to unseen target domains by learning from one or more source domain datasets [52]. Existing DG methods include domain meta-learning [25], DA [47, 53], decoupled representations [5], causal reasoning [41], and invariant risk minimization [1,4,10,23]. This section introduces invariant risk minimization and methods based on data augmentation for DG.

### 2.2 Invariant Risk Minimization

Arjovsky et al. [4] proposed the IRM framework to enhance the model's generalization ability by finding invariant features across different domains. The main improvement of VREx [23] is its ability to perform causal identification and provide more robust performance in the presence of covariate bias compared to

#### 4 Yaoyao Zhu et al.

IRM [4], especially for the case where the input data contains causal and noncausal elements. Despite the theoretical appeal of IRM, Rosenfeld et al. [37] show that in a nonlinear feature space, unless the test environment is very similar to the training environment, IRM may fail to find the optimal invariant predictor, suggesting that IRM may be risky when dealing with complex data distributions. Compared to IRM, VREx focuses on reducing the risk variance between different training domains, thus reducing the model's sensitivity to extreme distributional changes [1].

### 2.3 Data Augmentation

Data augmentation (DA) methods play a crucial role in DG by generating new samples. Methods such as ComboGAN [3] and Mixup [49], along with variants like MixStyle [53] and CutMix [48], have demonstrated significant performance. These methods operate in the original or feature space, offering computational simplicity while creating new samples to broaden model applicability across various domains. Moreover, SDA enriches dataset diversity by introducing Gaussian noise, interpolating neighbors, and leveraging shape-based approaches like geodesic constructions. Additionally, implicit methods such as moment swapping, proposed by Li et al. [28], enhance model generalization by altering feature embeddings during training, addressing statistical variations in target domains.

# 3 Preliminary

This section begins with a formal definition of the domain generalization problem in subsection 3.1, then details of invariant risk minimization in subsection 3.2.

#### 3.1 Domain Generalization

Let  $\mathcal{X}$  denote the input space and  $\mathcal{Y}$  denote the output space. **Domain**  $\mathcal{E} = \{(\mathbf{x}_i, y_i)\}_{i=1}^n \sim P_{XY}$  consists of data sample from joint distribution  $P_{XY}$ , where  $\mathbf{x} \in \mathcal{X} \subset \mathbb{R}^d$  denotes input data,  $y \in \mathcal{Y} \subset \mathbb{R}$  denotes the labels. The joint distribution is different between the domains, i.e.,  $P_{XY}^i \neq P_{XY}^j$ ,  $1 \leq i \neq j \leq M$ .

**Definition 1.** Let  $\ell(\cdot, \cdot)$  be the loss function, given M training domains  $\mathcal{E}_{tr} = \{\mathcal{E}^{i=1,...,M}\}$ . Then **domain generalization** aims is minimize error on unseen test domains  $\mathcal{E}_{te}, P_{XY}^{te} \neq P_{XY}^{i}, \forall i \in \{1,...,M\}$  by training model on source domains  $\mathcal{E}_{tr}$ : testing on

$$\min_{h} \mathbb{E}_{(\mathbf{x},y)\in\mathcal{E}_{te}}[\ell(h(\mathbf{x}),y)],\tag{1}$$

where  $h: \mathcal{X} \to \mathcal{Y}$  is a robust and generalizable prediction function.

#### 3.2 Invariant Risk Minimization

IRM [4] seek to achieve the best classifier over source domains, emphasizing cross-domain generalization capability, which is different from the traditional ERM [43] focuses only on optimization performance on a single training set.

**Definition 2.** When the classifier  $\mathbf{w}: \mathcal{H} \to \mathcal{Y}$  is simultaneously optimal for all domains, i.e.,  $\mathbf{w} \in \underset{\bar{w}: \mathcal{H} \to \mathcal{Y}}{\arg\min} \ell_e(\bar{\mathbf{w}} \circ \mathbf{a}), \forall e \in \mathcal{E}$ , data representation  $\mathbf{a}: \mathcal{X} \to \mathcal{H}$  induces an invariant classifier  $\mathbf{w} \circ \mathbf{a}$  across all domains  $\mathcal{E}$ .

Intuitively, the ideal feature is a cause of y, and the causal mechanism should not be affected by other mechanisms. Hence, this feature is a domain-invariant feature. Formally, the IRM is defined as:

$$\begin{array}{l}
\min \\
\mathbf{a} : \mathcal{X} \to \mathcal{H} \sum_{e \in \mathcal{E}_{tr}} \ell_e(\mathbf{w} \circ \mathbf{a}) \\
\mathbf{w} : \mathcal{H} \to \mathcal{Y}
\end{array}$$
s.t. 
$$\mathbf{w} \in \underset{\bar{\mathbf{w}} : \mathcal{H} \to \mathcal{Y}}{\arg \min} \ell_e(\bar{\mathbf{w}} \circ \mathbf{a}), \forall e \in \mathcal{E}_{tr}.$$
(2)

#### 4 Method

This section begins with details of one of the invariant risk minimization methods, VREx [1], and then in subsection 4.2 describes the proposed SDA method named Bayesian Random Semantic Data Augmentation (BSDA), and finally presented the proposed DG method called Bayesian Semantic Domain Generalization (BSDG) in subsection 4.3.

#### 4.1 VREx

VREx [23] et al. improved the constraints of IRMv1 [4] by introducing a penalty term for the risk variance, which induces the model to equalize the treatment of risk across multiple training domains, thus enhancing its robustness to changes in the underlying distribution. VREx is formalized as the following optimization problem:

$$\mathcal{L}_{\text{VREx}}(\theta) = \min_{\theta} \left[ \beta \cdot \text{Var} \left( \{ \ell_e(\theta) \}_{e=1}^M \right) + \sum_{e=1}^M \ell_e(\theta) \right], \tag{3}$$

where  $\theta$  denotes the model parameters,  $\ell_e(\theta)$  is defined as the loss (or risk) of the model on the e-th training domain, M is the total number of training domains,  $\beta$  is a positive weighting parameter, and Var denotes the variance.

## 4.2 Bayesian Random Semantic Data Augmentation

**Semantic Direction:** BSDA randomly selects semantic directions for augmentation, similar to the random selection of transformation methods in image space.

Semantic Magnitude: Given a data representation  $\mathbf{a}$ , semantic data augmentation is achieved by sampling the semantic magnitude  $\xi$  from the *distribution of the augmentable magnitude*, denoted as  $p(\xi|\mathbf{a})$ . Meanwhile, an indicator function  $\mathbb{I}_{\mathbf{a}\neq 0}$  masks semantic directions  $\mathbf{d}_{\lambda}$  with a feature value of zero to maintain the low-rank property of features [14, 20].

**Definition 3.** Given a data representation  $\mathbf{a}: \mathcal{X} \to \mathcal{H} \subset \mathbb{R}^k$ , BSDA is defined as:

$$\tilde{\mathbf{a}} = \mathbf{a} + \mathbb{I}_{\mathbf{a} \neq 0} \mathbf{d}_{\lambda} \odot \xi, \tag{4}$$

where  $d_i \sim Bernoulli(\lambda), \forall i = 1, 2, ..., k, \xi \sim p(\xi|\mathbf{a}).$ 

Estimation of the Distribution of Augmentable Magnitude In order to learn the augmentable magnitude range distribution  $p(\xi|\mathbf{a})$ , BSDA introduces a recognition model  $q_{\phi}(\xi|\mathbf{a})$  to approximate the true distribution  $p(\xi|\mathbf{a})$ . The Kullback-Leibler divergence measures the similarity between two distributions, and  $q_{\phi}(\xi|\mathbf{a})$  can be made to approximate  $p(\xi|\mathbf{a})$  by maximizing the Kullback-Leibler divergence. Thus, the optimization objective of BSDA is:

$$\tilde{\mathbf{a}} = \arg\max_{\phi} D_{KL}(q_{\phi}(\xi|\mathbf{a})||p(\xi|\mathbf{a})). \tag{5}$$

Assuming an edge distribution  $p(\xi) \sim \mathcal{N}(0, \mathbf{I})$  and  $q_{\phi}(\xi|\mathbf{a}) \sim \mathcal{N}(0, \sigma^2)$ , the mean will be set to 0 because we expect to learn an offset, not an augmented feature. Therefore, BSDA [2] optimizes the following objective function:

$$\mathcal{L}_{BSDA}(\phi, \varphi; \mathbf{a}) = KL(q_{\phi}(\xi|\mathbf{a})||p(\xi)) - \mathbb{E}_{\xi \sim q_{\phi}(\xi|\mathbf{a})}(\log p_{\varphi}(\mathbf{a}|\xi)). \tag{6}$$

#### 4.3 Bayesian Semantic Domain Generalization

This subsection introduces a domain generalization method termed Bayesian Semantic Domain Generalization (BSDG). As outlined in the introduction, we aim to increase support overlap using BSDA and minimize the risk variance of model across all training domains. Consequently, BSDG is formulated as the following optimization problem:

$$\mathcal{L}_{\mathrm{BSDG}}(\theta, \phi, \varphi) = \min_{\theta, \phi, \varphi} \left[ \frac{1}{M} \sum_{e=1}^{M} (\ell_e^{\mathbf{a}}(\theta) + \beta \mathcal{L}_{\mathrm{VREx}}(\theta) + \alpha \ell_e^{\tilde{\mathbf{a}}}(\theta)) + \alpha \mathcal{L}_{\mathrm{BSDA}}(\phi, \varphi) \right], \tag{7}$$

where  $\theta$  denotes the set of parameters of the model,  $\phi$  and  $\varphi$  are the parameters of the estimator and reconstructor of the BSDA, respectively.  $\ell_e(\theta)$  is defined as the loss of the model in the e-th training domain, and the superscripts  ${\bf a}$  or  $\tilde{\bf a}$  denote the original and augmented features, respectively.  $\alpha$  and  $\beta$  are the weights of the loss function.

# 5 Experiment

This section presents experiments conducted to validate the performance of BSDG on DG benchmarks. The experiments contain four subsections: experimental setup in subsection 5.1 experiments on nature images (subsection 5.2), experiments on medical images, a crucial subfield in computer vision (subsection 5.3), and ablation studies (subsection 5.4).

# 5.1 Experimental Setup

**Experimental setting:** Deep neural networks were trained using PyTorch 2.0.1, a deep learning framework, on the Ubuntu 22.04 operating system. The computer specifications include two NVIDIA GeForce RTX 4090 GPUs and an Intel Core 14900K CPU.

Implementation details of BSDA: For the encoder of the BSDA, we used a two-layer MLP as the feature extractor with the same number of neurons in each layer as the feature dimension, using GeLU as the activation function and BatchNormlization before activation. Similarly, the decoder is the same setup. The BSDA involves three hyperparameters, we set the probability of augmentation direction  $\lambda = 0.8$ , augmentation multiplicity U = 10 and loss weight  $\alpha = 0.5$ . All other hyperparameters follow the settings in DomainBed [16].

### 5.2 Experiment on Natural Images

This subsection conducts experiments for nature images on the DomainBed [16] benchmark.

**Dataset:** The DomainBed [16] benchmark comprises five datasets with  $224 \times 224$  images. This paper focuses on scenarios where P(x) remains unchanged, contrasting with DomainBed's evaluations in PACS, VLCS, and OfficeHome, where P(x) varies across domains. Therefore, this paper is only tested on the Terra Incognita [6] dataset. Terra Incognita [6] is an image dataset designed to assess the generalization capability of visual recognition algorithms across new environments. It consists of ten categories spanning four distinct camera trap locations, challenging models to adapt to novel scenarios.

**Implementation details:** DomainBed [16] is a widely used benchmark for DG, offering implementations of various baseline methods. Here, we utilize ResNet-18 [17], pre-trained on the ImageNet [13], as the feature extractor, employing the Adam [22] optimizer, with hyperparameters aligned to those in DomainBed [16].

**Evaluation protocol:** This paper uses the leave-one-domain cross-validation evaluation protocol and the training domain validation set for model selection [16], where the validation set is from all training domains.

**Experimental results:** Table 1 displays experimental accuracy results on the Terra Incognita dataset [6]. Results from other methods are adopted from Chen et al. [12], who employed identical test platform, network structure, and dataset. Experimental results demonstrate that the BSDG method consistently

**Table 1:** Average accuracy results on the Terra Incognita [6] dataset according to the DomainBed [16] benchmark. The **best** results are shown in bold, and the <u>second</u> results are shown in underline.

Algorithm	L100	L38	L43	L46	Average
ERM [43]	$42.1 \pm 2.5$	$30.1 \pm 1.2$	$48.9 \pm 0.6$	$34.0 \pm 1.1$	38.8
IRM [4]	$41.8 \pm 1.8$	$29.0 \pm 3.6$	$49.6 \pm 2.1$	$33.1\pm1.5$	38.4
Mixup [47]	$49.4 \pm 2.0$	$35.9 \pm 1.8$	$53.0 \pm 0.7$	$30.0 \pm 0.9$	42.1
MLDG [25]	$39.6 \pm 2.3$	$33.2 \pm 2.7$	$52.4 \pm 0.5$	$35.1\pm1.5$	40.1
CORAL [41]	$46.7 \pm 3.2$	$36.9 \pm 4.3$	$49.5 \pm 1.9$	$32.5 \pm 0.7$	41.4
MMD [26]	$49.1 \pm 1.2$	$36.4 \pm 4.8$	$50.4 \pm 2.1$	$32.3 \pm 1.5$	42.0
DANN [15]	$44.3 \pm 3.6$	$28.0 \pm 1.5$	$47.9 \pm 1.0$	$31.3\pm0.6$	37.9
CDANN [29]	$36.9 \pm 6.4$	$32.7 \pm 6.2$	$51.1 \pm 1.3$	$33.5\pm0.5$	38.6
MTL [8]	$45.2 \pm 2.6$	$31.0\pm1.6$	$50.6 \pm 1.1$	$34.9\pm0.4$	40.4
SagNet $[33]$	$36.3 \pm 4.7$	$\textbf{40.3}\pm\textbf{2.0}$	$52.5 \pm 0.6$	$33.3\pm1.3$	40.6
ARM [50]	$41.5 \pm 4.5$	$27.7 \pm 2.4$	$50.9 \pm 1.0$	$29.6 \pm 1.5$	37.4
RSC [18]	$42.8 \pm 2.4$	$32.2 \pm 3.8$	$49.6 \pm 0.9$	$32.9 \pm 1.2$	39.4
SelfReg [21]	$46.1 \pm 1.5$	$34.5 \pm 1.6$	$49.8 \pm 0.3$	$34.7\pm1.5$	41.3
GroupGRO [39]	$45.3 \pm 4.6$	$36.1 \pm 4.4$	$51.0\pm0.8$	$33.7 \pm 0.9$	41.5
MixStyle [53]	$\textbf{50.6}\pm\textbf{1.9}$	$28.0 \pm 4.5$	$52.1 {\pm} 0.7$	$33.0\pm0.2$	40.9
Fish [40]	$46.3 \pm 3.0$	$29.0 \pm 1.1$	$52.7 \pm 1.2$	$32.8\pm1.0$	40.2
SD[34]	$45.5 \pm 1.9$	$33.2 \pm 3.1$	$52.9 \pm 0.7$	$36.4 \pm 0.8$	42.0
CAD [38]	$43.1 \pm 2.6$	$31.1 \pm 1.9$	$53.1 \pm 1.6$	$34.7\pm1.3$	40.5
CondCAD [38]	$44.4 \pm 2.9$	$32.9 \pm 2.5$	$50.5 \pm 1.3$	$30.8\pm0.5$	39.7
Fishr [36]	$49.9 \pm 3.3$	$36.6 \pm 0.9$	$49.8 \pm 0.2$	$34.2\pm1.3$	42.6
MIRO [9]	$46.0 \pm 0.7$	$34.4 \pm 0.4$	$51.2 \pm 1.0$	$33.6 \pm 0.9$	41.3
DGRI [12]	$46.2 \pm 4.0$	$\underline{39.7\pm2.4}$	$53.0\pm0.6$	$\underline{36.0\pm0.3}$	43.7
VREx [23]	$48.0 \pm 1.7$	$41.1 \pm 1.5$	$51.8 \pm 1.5$	$32.0 \pm 1.2$	43.2
$\mathbf{BSDG}(\mathrm{ours})$	$46.9 \pm 1.9$	$38.3 \pm 1.5$	$\textbf{54.5}\pm\textbf{1.1}$	$\textbf{37.5}\pm\textbf{0.9}$	44.3

outperforms current popular DG methods. Specifically, it excels in domains L43 and L46.

# 5.3 Experiment on Medical Images

This subsection presents experiments on medical images using GDRBench [11].

**Dataset:** Diabetic retinopathy, a common complication of diabetes, is a major cause of blindness worldwide. Early and accurate grading of severity is essential for effective management of the disease. The study comprises fundus photo datasets from four distinct domains: IDRID [35], DEEPDR [31], APTOS [19], and RLDR [46].

Implementation details: The feature extractor used is ResNet-50 [17], pre-trained on ImageNet [13], and optimized with Adam [22]. Other hyperparameters are aligned with those specified in GDRBench.

**Evaluation protocol:** Visual models for medical images usually require training on a single source domain and subsequently generalizing to other do-

**Table 2:** Average AUC results on the FundusDG [11] dataset according to the GDR-Bench [11] benchmark. The **best** results are shown in bold, and the <u>second</u> results are shown in underline.

Algorithm	IDRID	DEEPDR	APTOS	RLDR	Average
ERM [43]	0.729	0.793	0.742	0.766	0.758
IRM [4]	0.729	0.770	0.697	0.722	0.731
VREx [23]	0.729	0.769	0.700	0.719	0.729
GREEN [32]	0.757	0.786	0.725	0.767	0.759
Mixup [47]	0.725	0.787	0.703	0.781	0.749
Fishr [36]	0.764	0.795	0.724	0.773	0.764
GDRNet [11]	0.760	0.794	0.754	0.759	0.767
$\overline{\mathbf{BSDG}(\mathrm{ours})}$	0.770	0.798	0.735	0.785	0.772

mains [11]. Therefore, this study adopts a single-source DG approach: training exclusively on one domain and evaluating on others. Evaluation employs a leave-one-domain cross-validation protocol, with Area Under Curve (AUC) as the primary metric widely accepted in medical image analysis.

**Experimental results:** The single-source DG task is challenging, and all IRM implementations fail in this scenario because IRM degrades into ERM. Table 2 demonstrates that the proposed method exhibits superior performance across most domains, achieving the highest average score (0.772), which underscores its robustness and effectiveness in DG for fundus image datasets.

#### 5.4 Ablation Study

IRM has various implementations, including IRMv1 [4], VREx [23], and IB-IRM [1]. Thus, this subsection performs two types of ablation experiments: first, comparing combinations of different IRM methods; second, investigating the interaction between BSDA and IRM, particularly focusing on feature constraints.

Combining with IRM BSDA is combined with various IRM implementations and evaluated on the ColoredMNIST dataset, including IRMv1 [4], VREx [23], and IB-IRM [1]. The results are shown in Table 3. We select VREx, which demonstrates the most significant average accuracy improvement across all domains, as the IRM constraint in BSDG.

Constraints on different features This subsection examines three implementations: VREx [23] constraints on original features, VREx-aug constraints on augmented features only. The experimental results are shown in Table 4. Results indicate optimal performance when using VREx constraints only on the original features. Comparing the results in the first and third rows reveals minimal improvement in network performance with additional VREx constraints. This supports the view of Ahuja et al. [1] that if pseudo-invariant features have

**Table 3:** Average accuracy results on the ColoredMNIST dataset according to the DomainBed benchmark [16]. BSDA is utilized to combine with various IRM implementations.

Method	+90%	+80%	-90%	Average
IRMv1 [4]	$50.0 \pm 0.2$	$50.1 \pm 0.2$	$10.0 \pm 0.0$	36.7
+ BSDA	$58.3 \pm 7.0$	$49.9\pm0.4$	$10.0\pm0.1$	$39.4 \ (+2.7)$
IB-IRM [1]	$56.9 \pm 3.6$	$49.8 \pm 0.2$	$10.1 \pm 0.2$	38.9
+ BSDA	$63.0\pm11.1$	$49.8\pm14.2$	$10.1\pm0.1$	$41.0 \ (+2.1)$
VREx [23]	$50.2 \pm 0.4$	$50.5 \pm 0.5$	$10.1 \pm 0.0$	36.9
+ BSDA	$50.6\pm0.2$	$59.7\pm8.2$	$10.1\pm0.1$	$40.1 \; (+3.2)$

**Table 4:** Average accuracy results on the ColoredMNIST dataset are reported based on the DomainBed benchmark [16]. BSDA [2] indicates the use of the BSDA module. VREx [23] indicates that the original model was constrained by VREx. VREx-aug indicates that the features augmented by BSDA were subjected to VREx constraints.

BSDA	VREx	VREx-aug	+90%	+80%	-90%	Average
			$50.0 \pm 0.2$	$50.1 \pm 0.2$	$10.0\pm0.0$	36.7
$\checkmark$			$49.7\pm0.3$	$54.8\pm3.4$	$9.8 \pm 0.2$	38.1
	$\checkmark$		$50.2\pm0.4$	$50.5\pm0.5$	$\textbf{10.1}\pm\textbf{0.0}$	36.9
$\checkmark$		$\checkmark$	$50.2 \pm 0.3$	$57.6 \pm 6.0$	$10.1 \pm 0.0$	39.3
✓	$\checkmark$	✓	$\underline{50.2\pm0.2}$	$50.1 \pm 0.2$	$\textbf{10.2}\pm\textbf{0.2}$	36.9
✓	✓		$\textbf{50.6}\pm\textbf{0.2}$	$\textbf{59.7}\pm\textbf{8.2}$	$10.1\pm0.1$	40.1

insufficient support overlap, both ERM and IRM may fail to address the OOD problem. Moreover, combining VREx and VREx-aug constraints degrades network performance, highlighting that using only VREx constraints achieves the best performance. BSDA aims to maximize sample diversity within permissible limits, while VREx restricts samples to a specific range based on existing information, reflecting their distinct objectives. Similar to the challenges in reinforcement learning of balancing exploration and exploitation. Therefore, applying VREx constraints solely on original features offers a method to balance exploration and exploitation.

### 6 Conclusion

We propose a novel domain generalization method to enhance the generalization ability of deep models. This method employs Bayesian semantic data augmentation to enrich sample diversity and overcome the generalization failures of IRM when it is insufficient support overlap. The ablation study exemplifies IRM's failure in generalization and shows that our method enhances model performance. Additionally, experimental results on the Terra Incognita and FundusDG datasets show that our proposed method outperforms existing approaches.

### References

- Ahuja, K., Caballero, E., Zhang, D., Gagnon-Audet, J.C., Bengio, Y., Mitliagkas, I., Rish, I.: Invariance principle meets information bottleneck for out-of-distribution generalization. Advances in Neural Information Processing Systems 34, 3438–3450 (2021) 1, 2, 3, 4, 5, 9, 10
- 2. Anonymous: Anonymous title. arXiv preprint arXiv:24xx.xxxx (2024) 3, 6, 10
- 3. Anoosheh, A., Agustsson, E., Timofte, R., Van Gool, L.: Combogan: Unrestrained scalability for image domain translation. In: Proceedings of the IEEE conference on computer vision and pattern recognition workshops. pp. 783–790 (2018) 4
- 4. Arjovsky, M., Bottou, L., Gulrajani, I., Lopez-Paz, D.: Invariant risk minimization. arXiv preprint arXiv:1907.02893 (2019) 1, 2, 3, 4, 5, 8, 9, 10
- Bai, H., Sun, R., Hong, L., Zhou, F., Ye, N., Ye, H.J., Chan, S.H.G., Li, Z.: Decaug: Out-of-distribution generalization via decomposed feature representation and semantic augmentation. In: Proceedings of the AAAI Conference on Artificial Intelligence. vol. 35, pp. 6705–6713 (2021) 3
- Beery, S., Van Horn, G., Perona, P.: Recognition in terra incognita. In: Proceedings of the European conference on computer vision (ECCV). pp. 456–473 (2018) 7, 8
- Bengio, Y., Mesnil, G., Dauphin, Y., Rifai, S.: Better mixing via deep representations. In: International conference on machine learning. pp. 552–560. PMLR (2013)
- 8. Blanchard, G., Deshmukh, A.A., Dogan, U., Lee, G., Scott, C.: Domain generalization by marginal transfer learning. arXiv preprint arXiv:1711.07910 (2017) 8
- 9. Cha, J., Lee, K., Park, S., Chun, S.: Domain generalization by mutual-information regularization with pre-trained models. In: ECCV (2022) 8
- 10. Chang, S., Zhang, Y., Yu, M., Jaakkola, T.: Invariant rationalization. In: International Conference on Machine Learning. pp. 1448–1458. PMLR (2020) 2, 3
- Che, H., Cheng, Y., Jin, H., Chen, H.: Towards generalizable diabetic retinopathy grading in unseen domains. In: International Conference on Medical Image Computing and Computer-Assisted Intervention. pp. 430–440. Springer (2023) 1, 8,
- Chen, L., Zhang, Y., Song, Y., Van Den Hengel, A., Liu, L.: Domain generalization via rationale invariance. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 1751–1760 (2023) 7, 8
- 13. Deng, J., Dong, W., Socher, R., Li, L.J., Li, K., Fei-Fei, L.: Imagenet: A large-scale hierarchical image database. In: CVPR (2009) 7, 8
- 14. Galanti, T., Poggio, T.: Sgd noise and implicit low-rank bias in deep neural networks. Tech. rep., Center for Brains, Minds and Machines (CBMM) (2022) 6
- 15. Ganin, Y., Ustinova, E., Ajakan, H., Germain, P., Larochelle, H., Laviolette, F., Marchand, M., Lempitsky, V.: Domain-adversarial training of neural networks. JMLR 17(1), 2096–2030 (2016) 8
- 16. Gulrajani, I., Lopez-Paz, D.: In search of lost domain generalization. arXiv preprint arXiv:2007.01434 (2020) 1, 7, 8, 10
- 17. He, K., Zhang, X., Ren, S., Sun, J.: Deep residual learning for image recognition. In: CVPR (2016) 1, 7, 8
- 18. Huang, Z., Wang, H., Xing, E.P., Huang, D.: Self-challenging improves cross-domain generalization. In: ECCV (2020) 8
- 19. Kaggle: Aptos 2019 blindness detection (2019) 8

- Kamalakara, S.R., Locatelli, A., Venkitesh, B., Ba, J., Gal, Y., Gomez, A.N.: Exploring low rank training of deep neural networks. arXiv preprint arXiv:2209.13569 (2022) 6
- 21. Kim, D., Yoo, Y., Park, S., Kim, J., Lee, J.: Selfreg: Self-supervised contrastive regularization for domain generalization. In: ICCV (2021) 8
- 22. Kingma, D.P., Ba, J.: Adam: A method for stochastic optimization. In: ICLR (2015) 7, 8
- Krueger, D., Caballero, E., Jacobsen, J.H., Zhang, A., Binas, J., Zhang, D., Le Priol, R., Courville, A.: Out-of-distribution generalization via risk extrapolation (rex). In: ICML (2021) 2, 3, 5, 8, 9, 10
- 24. Lee, S., Bae, J., Kim, H.Y.: Decompose, Adjust, Compose: Effective Normalization by Playing With Frequency for Domain Generalization. pp. 11776–11785 (2023) 2
- 25. Li, D., Yang, Y., Song, Y.Z., Hospedales, T.M.: Learning to generalize: Meta-learning for domain generalization. In: AAAI (2018) 3, 8
- Li, H., Pan, S.J., Wang, S., Kot, A.C.: Domain generalization with adversarial feature learning. In: CVPR (2018) 8
- 27. Li, P., Li, D., Li, W., Gong, S., Fu, Y., Hospedales, T.M.: A Simple Feature Augmentation for Domain Generalization 3
- 28. Li, P., Li, D., Li, W., Gong, S., Fu, Y., Hospedales, T.M.: A simple feature augmentation for domain generalization. In: ICCV (2021) 4
- 29. Li, Y., Tian, X., Gong, M., Liu, Y., Liu, T., Zhang, K., Tao, D.: Deep domain generalization via conditional invariant adversarial networks. In: ECCV (2018) 8
- 30. Liu, Q., Dou, Q., Yu, L., Heng, P.A.: Ms-net: multi-site network for improving prostate segmentation with heterogeneous mri data. IEEE transactions on medical imaging 39(9), 2713–2724 (2020) 1
- 31. Liu, R., Wang, X., Wu, Q., Dai, L., Fang, X., Yan, T., Son, J., Tang, S., Li, J., Gao, Z., et al.: Deepdrid: Diabetic retinopathy—grading and image quality estimation challenge. Patterns 3(6) (2022) 8
- 32. Liu, S., Gong, L., Ma, K., Zheng, Y.: Green: a graph residual re-ranking network for grading diabetic retinopathy. In: Medical Image Computing and Computer Assisted Intervention–MICCAI 2020: 23rd International Conference, Lima, Peru, October 4–8, 2020, Proceedings, Part V 23. pp. 585–594. Springer (2020) 9
- 33. Nam, H., Lee, H., Park, J., Yoon, W., Yoo, D.: Reducing domain gap by reducing style bias. In: CVPR (2021) 8
- Pezeshki, M., Kaba, O., Bengio, Y., Courville, A.C., Precup, D., Lajoie, G.: Gradient starvation: A learning proclivity in neural networks. In: NeurIPS (2021) 8
- 35. Porwal, P., Pachade, S., Kamble, R., Kokare, M., Deshmukh, G., Sahasrabuddhe, V., Meriaudeau, F.: Indian diabetic retinopathy image dataset (idrid): a database for diabetic retinopathy screening research. Data 3(3), 25 (2018) 8
- 36. Rame, A., Dancette, C., Cord, M.: Fishr: Invariant gradient variances for out-of-distribution generalization. In: ICML (2022) 8, 9
- 37. Rosenfeld, E., Ravikumar, P., Risteski, A.: The risks of invariant risk minimization arXiv preprint arXiv:2010.05761 (2020) 4
- 38. Ruan, Y., Dubois, Y., Maddison, C.J.: Optimal representations for covariate shift. In: ICLR (2022) 8
- 39. Sagawa, S., Koh, P.W., Hashimoto, T.B., Liang, P.: Distributionally robust neural networks for group shifts: On the importance of regularization for worst-case generalization. In: ICLR (2020) 8
- 40. Shi, Y., Seely, J., Torr, P.H., Siddharth, N., Hannun, A., Usunier, N., Synnaeve, G.: Gradient matching for domain generalization. In: ICLR (2021) 8

- 41. Sun, B., Saenko, K.: Deep coral: Correlation alignment for deep domain adaptation. In: ECCV (2016) 3, 8
- Upchurch, P., Gardner, J., Pleiss, G., Pless, R., Snavely, N., Bala, K., Weinberger, K.: Deep feature interpolation for image content changes. In: Proceedings of the IEEE conference on computer vision and pattern recognition. pp. 7064–7073 (2017) 2, 3
- 43. Vapnik, V.: The nature of statistical learning theory. Springer science & business media (1999) 1, 2, 5, 8, 9
- Wang, M., Liu, Y., Yuan, J., Wang, S., Wang, Z., Wang, W.: Inter-class and interdomain semantic augmentation for domain generalization. IEEE Transactions on Image Processing (2024) 3
- 45. Wang, Y., Huang, G., Song, S., Pan, X., Xia, Y., Wu, C.: Regularizing deep networks with semantic data augmentation. IEEE Transactions on Pattern Analysis and Machine Intelligence 44(7), 3733–3748 (2022). https://doi.org/10.1109/TPAMI.2021.3052951 2
- Wei, Q., Li, X., Yu, W., Zhang, X., Zhang, Y., Hu, B., Mo, B., Gong, D., Chen, N., Ding, D., et al.: Learn to segment retinal lesions and beyond. In: 2020 25th International conference on pattern recognition (ICPR). pp. 7403–7410. IEEE (2021)
- 47. Yan, S., Song, H., Li, N., Zou, L., Ren, L.: Improve unsupervised domain adaptation with mixup training. arXiv preprint arXiv:2001.00677 (2020) 2, 3, 8, 9
- 48. Yun, S., Han, D., Oh, S.J., Chun, S., Choe, J., Yoo, Y.: Cutmix: Regularization strategy to train strong classifiers with localizable features. In: Proceedings of the IEEE/CVF international conference on computer vision. pp. 6023–6032 (2019) 4
- Zhang, H., Cisse, M., Dauphin, Y.N., Lopez-Paz, D.: mixup: Beyond empirical risk minimization. arXiv preprint arXiv:1710.09412 (2017) 4
- 50. Zhang, M., Marklund, H., Dhawan, N., Gupta, A., Levine, S., Finn, C.: Adaptive risk minimization: A meta-learning approach for tackling group distribution shift. arXiv preprint arXiv:2007.02931 (2020) 8
- 51. Zhang, Z., Wang, B., Jha, D., Demir, U., Bagci, U.: Domain Generalization With Correlated Style Uncertainty. pp. 2000–2009 (2024) 2
- 52. Zhou, K., Liu, Z., Qiao, Y., Xiang, T., Loy, C.C.: Domain generalization: A survey. IEEE TPAMI (2022) 3
- 53. Zhou, K., Yang, Y., Qiao, Y., Xiang, T.: Domain generalization with mixstyle. arXiv preprint arXiv:2104.02008 (2021) 2, 3, 4, 8