
Teaching Transformers Causal Reasoning through Axiomatic Training

Aniket Vashishtha

Microsoft Research, India
vashishthaaniket07@gmail.com.com

Abhinav Kumar

Massachusetts Institute of Technology, USA
akumar03@mit.edu

Abbavaram Gowtham Reddy

IIT Hyderabad, India
cs19resch11002@iith.ac.in

Vineeth N Balasubramanian

IIT Hyderabad, India
vineethnb@iith.ac.in

Amit Sharma

Microsoft Research, India
amshar@microsoft.com

Abstract

For text-based AI systems to interact in the real world, causal reasoning is an essential skill. Since interventional data is costly to generate, we study to what extent an agent can learn causal reasoning from passive data. Specifically, we consider an axiomatic training setup where an agent learns from multiple demonstrations of a causal axiom (or rule), rather than incorporating the axiom as an inductive bias or inferring it from data values. A key question is whether the agent would learn to generalize from the axiom demonstrations to new scenarios. For example, if a transformer model is trained on demonstrations of the causal transitivity axiom over small graphs, would it generalize to applying the transitivity axiom over large graphs? Our results, based on a novel axiomatic training scheme, indicate that such generalization is possible. We consider the task of inferring whether a variable causes another variable, given a causal graph structure. We find that a 67 million parameter transformer model, when trained on linear causal chains (along with some noisy variations) can generalize well to new kinds of graphs, including longer causal chains, causal chains with reversed order, and graphs with branching; even when it is not explicitly trained for such settings. Our model performs at par (or even better) than many larger language models such as GPT-4, Gemini Pro, and Phi-3. Overall, our axiomatic training framework provides a new paradigm of learning causal reasoning from passive data that can be used to learn arbitrary axioms, as long as sufficient demonstrations can be generated.

1 Introduction

Causal reasoning can be defined as a set of reasoning procedures consistent with pre-defined axioms or rules that are specific to causality [11]. For instance, d-separation and rules of do-calculus can be considered as axioms and specifications of a collider or a backdoor set can be considered as rules that can be derived from axioms. Typically, causal reasoning is done over data corresponding to variables in a system. Axioms or rules are incorporated as inductive biases in a machine learning (ML) model, through regularization, model architecture, or the choice of variables for a particular analysis. Depending on the kind of available data—observational, interventional, or counterfactual—Pearl’s ladder of causation [5] defines the kinds of causal reasoning that is possible.

As axioms are the building blocks of causality, we study whether it is possible to directly learn the axioms using ML models. That is, rather than learning from data that is the result of axioms followed by a data-generating process, what if a model can learn an axiom (and thus causal reasoning) directly from symbolic demonstrations of the axiom? Such a model has the advantage that it can be applied for causal reasoning in diverse downstream scenarios, compared to task-specific causal models built

using specific data distributions. This question gains relevance as language models make it possible to learn over symbolic data expressed in natural language. In fact, recent studies have evaluated whether large language models (LLMs) can do causal reasoning by creating benchmarks that encode causal reasoning problems in natural language [18, 15, 16].

Specifically, we propose a new way of learning causal reasoning through axiomatic training. We posit that causal axioms can be expressed as the following symbolic tuple, $\langle \text{premise}, \text{hypothesis}, \text{result} \rangle$ where *hypothesis* refers to a causal claim and *premise* refers to any relevant information to decide whether the claim is true or not (*conclusion*). The conclusion could simply be “Yes” or “No”. For example, the collider axiom from [16] can be expressed as, *premise*: “ $A \perp\!\!\!\perp B, B \not\perp\!\!\!\perp C, A \not\perp\!\!\!\perp C$ ”; *hypothesis*: “Does A cause C ?”; and the *conclusion* as “Yes”. Based on this template, a large number of synthetic tuples can be generated, e.g., by changing the variable names, changing the number of variables, changing the order, and so on. The key question is: if a model is trained on such data, would it learn to apply the axiom to new scenarios?

To answer this question, we train a transformer model from scratch on symbolic demonstrations of the causal irrelevance axiom [11]. To evaluate generalizability, we train on simple chains of the causal irrelevance axiom of size 3-5 nodes and test on multiple different aspects of generalization, including length generalization (chains of size 7-15), name generalization (longer variable names), order generalization (chains with reversed edges or shuffled nodes), and structure generalization (graphs with branching). We find that a model trained on simple chains generalizes to applying the axiom multiple times over larger chains, but it is unable to generalize to the more complex scenarios like order or structure generalization. However, when we train a model on a combined dataset of simple chains and chains with some edges randomly reversed, we find that the model generalizes well across all kinds of evaluation scenarios. Extending the findings on length generalization for NLP tasks [17, 7, 13, 10], we find a critical role of positional embedding in ensuring causal generalization across length and other aspects. Our best model has no positional encoding, although we find that sinusoidal encoding also works well for some scenarios.

The axiomatic training approach also generalizes to a harder problem proposed in [16]. The task is to distinguish correlation from causation given a premise containing statistical independence statements. Solving this task requires knowledge of multiple axioms, including d-separation and Markov property. Using the same method to generate synthetic training data and train the model as above, we find that a transformer trained on task demonstrations over 3-4 variables learns to solve this task for graphs with 5 variables. On this task, our model’s accuracy is higher than larger LLMs such as GPT-4 and Gemini Pro.

Our work provides a new paradigm of teaching models causal reasoning through symbolic demonstrations of axioms, which we call *axiomatic training*. The data generation and training procedure is general and can be applied to learn any new axiom, as long as it can be expressed in the symbolic tuple format. More generally, our results contribute to the literature on causal learning from passive data [19], showing a general way to learn any causal axiom through passive demonstrations.

2 Related Work

LLMs for Knowledge-Driven Causal Reasoning: Recent developments in Large Language Models (LLMs) have highlighted their potential for knowledge-driven causal discovery. Unlike traditional methods which focus on statistical patterns or correlations, LLMs utilize knowledge acquired through their pretraining to reason about and identify causal structures based on metadata of variables [18, 4, 22, 30, 28]. However, possibility of memorization of existing benchmarks in the pretraining of these LLMs has been a major criticism. As a result, recent work [31] argues that LLMs are not actually performing causal reasoning, but simply learning correlations about causal facts. In addition, there are critical failure modes of using LLMs for causal discovery due to hallucinations or not obeying the acyclic constraint when generating graph edges [28]. To evaluate causal reasoning capabilities of LLMs, [16] and [15] propose formal causal inference evaluation benchmarks to infer direct and indirect causal relationships, and highlight the failure of LLMs in performing accurate causal reasoning.

Impact of Positional Encoding on Generalization: Length generalization capabilities of transformers has been studied in the past to better understand their different failure modes across various settings [14, 32, 10]. Previous work [17, 7, 13, 26] emphasizes the impact of positional encoding in

length generalization capability of transformers. To understand how transformers can be optimized for learning through axiomatic training and generalizing to unseen larger causal structures, we also examine different types of positional encoding such as no positional encoding (PE), Learnable PEs [24] and Sinusoidal PEs [29].

Synthetic data generation for teaching transformers reasoning: Synthetic data generation has been explored for optimising model training for reasoning. For example, [21, 12] use LLM-generated synthetic text for training Phi-1 and Phi-1.5 models and show impressive performance for reasoning-based tasks. [27] introduce a novel neuro-symbolic framework to pre-train a transformer model for Olympiad-level math problems. Their method involves generating synthetic geometric data for pre-training, followed by fine-tuning on auxiliary constructions to solve specific theorems. Building on this stream of work, we apply synthetic data generation for teaching causal reasoning.

3 Learning Causal Axioms using Transformers

Instead of performing causal reasoning using observational or interventional data, we study whether it is possible to learn general rules of causality directly from symbolic axioms. We begin by asking the question “are there any minimal sufficient characterization of causal principles?”. There has been a fundamental work from Galles and Pearl [11] where they axiomatize causal relevance (or equivalently irrelevance). They show that for a given *stable probabilistic* causal model (defined below), there exists a finite set of axioms that completely characterized by axioms of path interception in corresponding directed graphs. We now study how such causal relevance statements can be incorporated into transformer models.

Let $\mathcal{M} = (\mathbf{X}, \mathbf{U}, \mathcal{F})$ be a causal model defined over a set of endogenous variables \mathbf{X} , exogenous variables \mathbf{U} and the causal relationship between them defined by set of structural equations \mathcal{F} [11]. Let \mathcal{G} be the causal graph associated with the causal model \mathcal{M} where the nodes \mathbf{V} in \mathcal{G} correspond to the variables in \mathcal{M} and an edge $V_i \rightarrow V_j$ between any two nodes V_i, V_j denote the causal relationship between them.

Definition 3.1 (Causal Irrelevance, Defn. 7 in [11]). *X is probabilistically causally irrelevant to Y given Z , written $(X \not\rightarrow Y|Z)$ iff: $\mathbb{P}(y|z, do(X) = x) = \mathbb{P}(y|z, do(X) = x'), \forall x, x', y, z$ i.e., once we hold Z fixed at z , intervening on X will not change the probability of Y .*

Next, we restate the stability assumption for a causal model from [11] that gives a richer set of finite axiomatization for probabilistic causal irrelevance.

Assumption 3.1 (Stability, Definition 9 in [11]). *Let \mathcal{M} be a causal model. Then an irrelevance $(X \not\rightarrow Y|Z)$ in \mathcal{M} is stable if it is shared by all possible probability distribution over \mathcal{M} . The causal model \mathcal{M} is stable if all of the irrelevances in \mathcal{M} are stable.*

Under the stability assumption (see Assumption 3.1), Galles and Pearl [11] characterizes six axioms that completely characterize causal irrelevance (Definition 3.1) or equivalent causal relevance statements after using the corresponding contrapositive statements. An axiom of causal irrelevance is of the form (given in conjunctive normal form):

$$\bigwedge_s \bigvee_t (\mathbf{X}_i^{s,t} \not\rightarrow \mathbf{X}_j^{s,t} | \mathbf{X}_k^{s,t}) \implies \bigwedge_l \bigvee_n (\mathbf{X}_i^{l,n} \not\rightarrow \mathbf{X}_j^{l,n} | \mathbf{X}_k^{l,n})$$

where \wedge is “logical and”, \vee is “logical or” and for a given (s, t) or (l, n) pair, $\mathbf{X}_i, \mathbf{X}_j, \mathbf{X}_k$ are disjoint subsets of observed variables \mathbf{X} . In the above causal irrelevance statement, if the antecedent is true, the consequent is also true.

3.1 Transitivity Axiom for Causality

Transitivity axiom is intuitive in nature and presented for causal irrelevance in [19]. In our study, we focus on the transitivity axiom for its simplicity and ease of expressing causal chains and other graph structures for building diverse evaluation sets. For a stable probabilistic causal model (§3), given variables X, Y, Z in the system, the transitivity axiom is given by:

$$(X \not\rightarrow Y|Z) \implies (A \not\rightarrow Y|Z) \vee (X \not\rightarrow A|Z) \forall A \notin X \cup Z \cup Y \quad (1)$$

which could be further simplified by taking the contrapositive of the expression to derive its causal relevance version which could be given as follows:

$$\exists A \notin X \cup Y \cup Z \text{ s.t. } \underbrace{(X \rightarrow A|Z) \wedge (A \rightarrow Y|Z)}_{P:\text{premise}} \implies \underbrace{(X \rightarrow Y|Z)}_{H:\text{hypothesis}}$$

We call the LHS as *Premise* and the RHS as *Hypothesis*. Our key idea is that we can use such an axiom to generate thousands of synthetic symbolic expressions that can be used to teach a transformer the specific axiom. The trained model is then evaluated on whether it can apply these axioms to new causal structures that were not available in the training set.

3.2 Axiomatic Training: Dataset, Loss Function, and Positional Encoding

Training data. Based on a specific axiom, we can map a hypothesis given the premise to its correct label (*Yes* or *No*). To create a training dataset, we enumerate all possible tuples of $\{(P, H, L)\}_N$ where P is the premise, H is the hypothesis and L is the label (*Yes/No*) for a particular setting of the variables X, Y, Z, A . Given a premise P based on a given causal graph, if the hypothesis can be derived by applying the specified axiom (once or multiple times), then label L is *Yes*; otherwise, *No*. For example, suppose the underlying true causal graph of a system has the topology of a chain, $X_1 \rightarrow X_2 \rightarrow X_3 \rightarrow \dots \rightarrow X_n$. Then, a possible premise could be $X_1 \rightarrow X_2 \wedge X_2 \rightarrow X_3$, and the corresponding hypothesis $X_1 \rightarrow X_3$ will have label *Yes* whereas another hypothesis $X_3 \rightarrow X_1$ will have label *No*. The above axiom could be inductively applied multiple times to generate more complex training tuples.

For our training setup, a synthetic dataset D is constructed with N axiomatic instances generated using the transitivity axiom. Each instance in D is structured in the form of a premise P , which is the natural language expression of a causal structure (e.g., “ X causes Y . Y causes Z ”), followed by the hypothesis in the form of a question H_q (e.g., “Does X cause Y ?”), which is then followed by the final label L (e.g., “Yes” or “No”). Each instance in D is structured as (P_i, H_{ij}, L_{ij}) ; $j \in \{1, \dots, \binom{n}{2}\}$ where n is the number of nodes in each i th premise, thus effectively covering all pairs of nodes in each unique chain of a given causal graph.

Loss function. Given a dataset, the loss function is defined based on the ground truth label for each tuple, represented as $\mathbb{E}_{P, H, L \sim P_{\text{train}}} - \log(P(L|P, H))$. A preliminary analysis indicated promising results with this loss formulation compared to next token prediction loss.

Positional Encoding. In addition to the training data and loss function, another important factor is the choice of positional encoding. Positional Encoding (PE) play a crucial role of providing information about the absolute and relative position of tokens in a sequence [29]. [29] propose an absolute positional encoding strategy using periodic functions (e.g., sinusoidal or cosine) to initialize these encodings. Absolute positional encoding provides definite values for all positions across any sequence length. However, studies [23, 9] show absolute positional encoding fails in length generalization tasks for transformers. In the learnable APE variant [24], each positional embedding is randomly initialized and trained with the model. This approach falters with sequences longer than those seen in training, as the new positional embeddings remain untrained and randomized. Interestingly, recent findings [17, 13] indicate that removal of PEs in auto-regressive models can improve model’s length generalization capabilities, wherein the attention mechanism during auto-regressive decoding is sufficient to encode positional information. We experiment with different positional encoding to understand their impact on generalization in causal tasks: learnable position encoding (LPE), sinusoidal positional encoding (SPE), no positional encoding (NoPE).

3.3 Data Perturbation: A Key to Model Generalization

Variability or diversity in training data in the form of perturbation helps aid model generalization [20]. For axiomatic training, we provide structured perturbation to extend our transformer model across complex structures for which it was not explicitly trained on. We introduce perturbations at multiple levels in the training data to maximize diversity in the distribution of the training set, as explained below.

1. **Node names:** Each node in the transitivity chain is represented by an alphanumeric name comprising 1-3 characters. The length of a name and the specific characters are randomly selected during data generation.

2. **Causal Graph Topology:** We consider two main types of causal graphs for the training set.
 - (a) **Sequential:** All causal edges are directed forward, thus forming a typical transitivity chain, e.g. $X \rightarrow Y \rightarrow Z$.
 - (b) **Random Flipping:** Given a chain of sequential nodes, we randomly reverse some edges creating complexity by disrupting direct paths between subsequent nodes (eg. $X \rightarrow Y \leftarrow Z$). This can be expressed simply through natural language like: "*X causes Y. Z causes Y.*"
3. **Length level:** To facilitate transformers understanding of the axiom, we incorporate chains of varying lengths, ranging from 3 to 6 nodes in our training set.

Random flipping introduces forks and colliders, which form the building blocks of any causal DAG. This helps incorporate complexity in model training, thus aiding its capability to generalize across multiple structures.

3.4 Assessing Axiomatic Learning in Transformers

To evaluate if a trained model has learnt the correct understanding of an axiom instead of relying on shortcuts or correlation-based features, designing an out-of-distribution (OOD) evaluation set is important. To tackle this, we evaluate our model across multiple types of complex structures that are not seen during training. We divide the structural complexities as follows:

1. **Length:** Evaluating whether our model accurately infers causal relationships for sequences or chains (both sequential and ones with random flipping) longer than those in the training set.
2. **Node Name Shift:** Testing the model’s performance with longer node names, increasing from 1-3 characters used in the training set to 8-10 characters. Findings of [16] show how shift in node names used in finetuning of language models result in generalization failure in inferring causal relationships from correlational relationships even though the model had impressive performance on in-distribution node names, further motivating this analysis.
3. **Order of Chains:** a) **Completely reversed chains:** This evaluation is inspired by the reversal curse [6] that revealed generalization failure of LLMs in answering questions in reversed sequences despite knowing the answers in the original order. We evaluate the capacity of axiomatic training to enable reasoning over reversed chains even when not explicitly trained on any completely reversed chains. A completely reversed chain will be of the form $X \leftarrow Y \leftarrow Z$ with its natural language representation as: "*Y causes X. Z causes Y.*", where X, Y, Z are replaced by random alphanumeric names. b) **Shuffling of Sequences:** Causal sequences with random edge flips, as defined in 3.3 represented by natural language statements sequentially (*A causes B. B causes C ...*), are shuffled to add complexity and break sequential order. This tests transformers’ ability to infer accurate relationships regardless of sequence order of premise.
4. **Branching:** Causal graphs with dense branching pose a challenging evaluation task. While the training set comprises simplistic linear sequences, this evaluation setup involves multiple branches, colliders, forks, and chains in one network, with significantly high complexity. We measure complexity of a graph using its branching factor: Number of edges/Number of nodes.

Unlike length and node name generalization, the reversal and branching evaluation setups change the causal structure and hence better evaluate whether the model has learnt accurate representations for causal structure. Branching is perhaps the most challenging since it contains new structures (due to a higher branching factor) that were unseen during training.

4 Applying Axiomatic Training to Learn Causal Transitivity Axiom

4.1 Training and Evaluation Datasets

Based on the above discussion, a dataset can be characterized by relative frequency of different types of causal structures such as linear, completely reversed sequences, and so on. Given a set of causal sequences $X = \{X_1, \dots, X_n\}$ where each causal sequence X_i takes the form: $X_i = [e_{jk} \mid j > 0, k > 0]$. Here e_{jk} represents an edge between node j and k in the i th causal sequence (can also be represented as $X_{i,j}, X_{i,k}$) such that each e_{jk} translates to " $X_{i,j}$ causes $X_{i,k}$." in natural language. $V_i = \{X_{i,1}, X_{i,2}, \dots, X_{i,m}\}$, represents set of vertices in causal sequence X_i .

Let f_{dim} represent the maximum value for a given perturbation dimension dim , along which we construct train and evaluation sets for our axiomatic framework. For each dimension, we choose

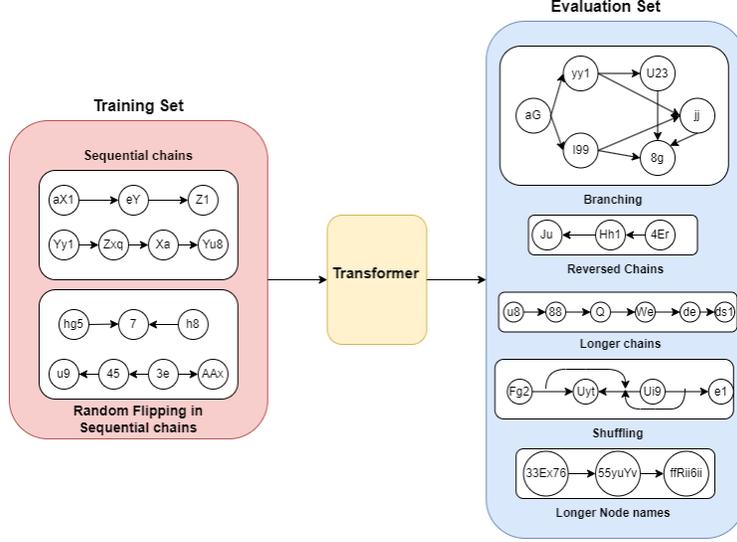


Figure 1: **Evaluating structural generalization of transformers through axiomatic training.** We train a transformer on two simple causal structures: chains and chains with random flipping of some edges. All training instances consist of 3-6 nodes. The trained model is evaluated on significantly more complex structures: bigger causal graphs with >6 nodes, more branched networks with higher average in-degree and out-degree, complete reversals, longer sequences, shuffled natural language statements of sequences and longer node names.

a threshold $\tau_{dim} \in L$, such that $f_{dim} < \tau_{dim}$ forms our training set and $f_{dim} \geq \tau_{dim}$ forms the evaluation set. So, $f_{dim} \in \{f_{len}, f_{branch}, f_{nodelen}, f_{revfactor}, f_{shuffle}\}$ where:

- $f_{len} = \max_{V_i}(len(V_i))$, gives the maximum number of nodes across all causal sequences. τ_{len} for length is set at 6, with $f_{len} \in [3, 6]$.
- $f_{branch} = \max_{V_i}(|X_i|/|V_i|)$ gives the maximum branching factor in a dataset, with $\tau_{branch} = 0.8$ (for 6 node linear sequences). For sequences in the train set, the branching factor ranges from 0.6 to 0.8 for 3 to 6 length sequences.
- Let $l_{i,j}$ be the length of the name of the node $X_{i,j}$, then $l_{i,j} = (len(X_{i,j}))$. Therefore, the maximum length of node names across all nodes in all causal sequences can be represented as: $f_{nodelen} = \max_{1 \leq i \leq n, 1 \leq j \leq m} l_{i,j}$. We set $\tau_{nodelen}$ for train set as 3, with $f_{nodelen} \in [1, 3]$.
- Given any causal sequence X_i and a function N , where $N(X_{i,j}, X_{i,j+1})$ returns natural language representation of a directed edge between j and $j+1$ node in the causal chain X_i . $f_{shuffle} = \cap_{V_i,j} Perm(N(X_{i,j}, X_{i,j+1}))$, where $N(X_{i,j}, X_{i,j+1})$ represents deviation from original sequential order of natural language sentences to represent X_i .
- Given a causal sequence X_i and let $R(X_i, f_{revfactor})$ be an operation on the causal chain that flips the direction of every edge in the sequence with probability $f_{revfactor}$. In the training set, there is a directed edge between every sequential pair of nodes $X_{i,j}, X_{i,j+1}$ with $f_{revfactor} = 0$ (for linear sequence, $X_{i,j} \rightarrow X_{i,j+1}$) or 0.5 (for sequence with random flipping, $X_{i,j} \rightarrow X_{i,j+1}$ or $X_{i,j} \leftarrow X_{i,j+1}$) In the evaluation set $f_{revfactor} = 1$ i.e., all sequences for reversal evaluation setup are completely reversed unlike in train set where no sequence is present where all edges are completely reversed.

4.1.1 Training Datasets

Using a straightforward transitivity chain-based training setup, we aim to understand how variability or noise, introduced through randomly flipped edges, varying sizes of node names, and different chain lengths, enhances the generalization abilities of our transformer model to handle longer, branched, and reordered complex settings. We perform multiple ablations with different training sets to understand possible contributing factors towards the model's generalization. Our training setup consists of around 175k instances of sequential chains with size of chains ranging from 3 to 6 nodes. We use three versions of training data to evaluate the impact of different noise perturbations, and the impact it has across diverse evaluation setups when a transformer is trained from scratch using that. Each

of our training set is a balanced set with equal number of instances from both label class ('Yes' and 'No'). Our three sets can be described as follows.

- **Training Setup 1 (TS1):** This setup comprises of 73k chains with random flipping and 101k sequential linear chains. Since flipping is done randomly across all consecutive pairs of nodes in the given chain, some complete reversals are also formed. In this training set around 12k completely reversed chains are present. However, only when evaluating for reversal chain test setup, we remove all the reversed chains from this training set and re-train the model from scratch with the remaining sequential and randomly flipped chain sequences (to ensure that the model has not seen any completely reversed chain in its training).
- **Training Setup 2 (TS2):** This setup comprises of more simple sequential chains (132k), while we decrease chains where random flipping is done (42k), to keep the overall number of training instance constant (around 175k).
- **Only Causal Chains (OCC):** This set comprises of sequential transitivity chains without any edge being randomly flipped. This helps us understand whether addition of noise in the form of randomly flipping of edges is helpful or not for generalization and to what extent.

4.1.2 Evaluation Datasets

To evaluate the impact of variability in causal sequences on training transformers across different OOD structural dimensions as described in Section 3.4, we design different evaluation sets encompassing natural language representation of causal structures with varying levels of complexity. This helped us evaluate whether the model is capable of learning accurate structural understanding and application of transitivity axiom to more complex networks. Similar to train sets, the evaluation sets have equal number of instances from both label classes. Our evaluation sets to assess generalization capabilities of the model could be described as follows:

- **Length Generalization EvalSet:** Testing on causal sequences with length >6 upto 15, longer than any sequence encountered by the model in training set. Length generalization is evaluated for both sequential chains and chains with randomly flipped edges.
- **Node Name EvalSet:** Assessed model's generalization capabilities to sequences with longer node names, increasing from 1-3 characters used in training set to 8-10 characters. To add onto the complexity, we also include sequences longer than any sequence in the train set (>6) upto 9 length.
- **Reversal EvalSet:** Evaluated performance of our transformer model, with no completely reversed sequence in its training, on reversed causal sequences. Sequences upto 6 length were evaluated.
- **MultiEval_{SLR} (Shuffling + Random Flipping + Length Sequence):** This setup involves evaluation on 3 levels of complexities together: shuffling of sentence for representing the sequences, each sequence having random flipping, and some sequences having longer length than sequences in training set (upto 9).
- **Branching EvalSet:** One of the most complex evaluation setups, with dense networks containing multiple branches, colliders and forks. While each sequence in the training set had values of 1-2 for both in-degree and out-degree across all nodes, in this setting a node can have maximum value of $n - 1$ for both, and minimum of 0 creating more complicated structures than the ones transformer had encountered during its training. To add onto the complexity we evaluate on structures with more nodes (8,10,12), than any unique causal sequence in the training set besides 5 node networks. We evaluate multiple densely branched networks constructed using the Erdős-Rényi model, where we provide number of edges and nodes in accordance to the values of branching factor (1.4 and 2) we use for evaluation. We implement this using igraph package in python [8] to get different unique graphs with required branching factors for evaluation.

4.2 Implementation Details: Architecture, Tokenizer and Training Procedure

We train a decoder-based 67 million parameter model based on GPT-2's architecture. The model has 12 attention layers, 8 attention heads and 512 embedding dimensions. The model is trained from scratch on each of our training datasets. To understand the effect of Positional Encodings (PE), we consider Sinusoidal PE (SPE) [29], Learnable PE (LPE) [24] and having no PEs (NoPE) [17, 13]. All models are trained for 100 epochs using the AdamW optimizer with $1e-4$ learning rate.

Since the training dataset follows a specific structure, we develop a custom tokenizer. Alphanumeric node names are tokenized at a character level, while special terms such as 'causes', 'Does', 'cause',

Model	7		8		9		10		11		12		13		14		15	
	FS	RF																
Baselines																		
GPT-4	0.95	0.98	0.97	0.93	0.87	0.94	0.91	0.87	0.90	0.95	0.92	0.92	0.85	0.93	0.93	0.93	0.89	0.86
Gem-Pro	0.63	0.73	0.69	0.74	0.64	0.75	0.65	0.81	0.72	0.78	0.60	0.80	0.59	0.68	0.67	0.64	0.61	0.66
Phi-3	0.81	0.85	0.96	0.85	0.85	0.85	0.87	0.89	0.90	0.86	0.84	0.85	0.91	0.84	0.90	0.80	0.78	0.85
Axiomatic Training																		
TS1 w NoPE	1.00	0.99	0.95	0.96	0.88	0.89	0.76	0.88	0.73	0.90	0.77	0.92	0.61	0.82	0.67	0.78	0.68	0.81
TS1 w LPE	0.98	0.96	0.92	0.97	0.77	0.90	0.59	0.87	0.57	0.86	0.57	0.84	0.55	0.73	0.51	0.76	0.50	0.68
TS1 w SPE	0.99	0.95	0.95	0.94	0.86	0.76	0.80	0.75	0.76	0.79	0.84	0.68	0.79	0.63	0.85	0.65	0.77	0.69
TS2 w NoPE	1.00	0.98	0.99	0.97	0.92	0.91	0.88	0.90	0.86	0.92	0.95	0.90	0.96	0.83	0.81	0.84	0.85	0.78
TS2 w LPE	1.00	0.98	0.88	0.97	0.80	0.88	0.62	0.92	0.66	0.91	0.64	0.81	0.65	0.75	0.62	0.75	0.62	0.77
TS2 w SPE	0.95	0.93	0.81	0.84	0.56	0.34	0.50	0.38	0.50	0.44	0.51	0.57	0.46	0.74	0.52	0.75	0.50	0.77
OCC w NoPE	0.98	0.58	0.79	0.49	0.86	0.51	0.92	0.49	0.72	0.57	0.90	0.50	0.81	0.52	0.84	0.52	0.83	0.46

Table 1: Accuracy on longer linear sequential chains with all edges in forward direction (Forward Sequence, FS) and sequences with randomly flipped edges (Random flipping, RF). Trained model remains the same across all setups. For longer chains, NoPE performs best on sequential linear setup. Random baseline accuracy = 0.5.

‘Yes’, and ‘No’ are tokenized at the word level. Such an approach avoids out of vocabulary (OOV) tokens at test time since the alphanumeric node names in the test set can be different than those in the training set. Following this approach, the vocabulary size of our transformer model is 69.

4.3 Baselines Using Existing LLMs

Given recent work on how LLMs can be leveraged for causal reasoning [18, 28, 4], we include language models such as GPT-4 (*gpt-4-32k*) [3], Gemini (*gemini-pro*) [2] and Phi-3 (*Phi-3-mini-128k-instruct*) [1] as baselines. Note that each of these models is significantly larger than our model and known to perform well on reasoning tasks, with the smallest baseline model Phi-3 having 3.8 billion parameters. We incorporate both commercial (GPT-4 and Gemini Pro) and open-source (Phi-3) models covering a range of size and capabilities. To evaluate the baseline models, we follow a simple zero-shot prompting strategy. For each tuple, we provide the natural language expression of the causal graph (*Premise*) followed by the question (*Hypothesis*) and prompt the LM to answer it in either ‘Yes’ or ‘No’ (*Label*). Here is an example prompt: “*EX causes T. T causes 9. 9 causes W. W causes 7. 7 causes M. M causes a. Does EX cause T? Answer in ‘Yes’ or ‘No’ only.*” A1 contains some examples of all types of prompts and instances used for querying as well as training for different structural types.

5 Results

5.1 Generalization to Complex Causal Scenarios

We present results on how well an axiomatically trained transformer can generalize to larger and more complex causal graphs, and how it compares to pre-trained LLMs.

Length Generalization: Table 1 shows accuracy of different models when evaluated on larger causal chains that were not seen during training. Among the baseline pre-trained LMs, GPT-4 obtains the highest accuracy on both standard and randomly flipped chains. It is remarkable that our TS2 (NoPE) model obtains competitive performance to the trillion-scale GPT-4 model, even though it had never seen larger sequences during training. In particular, for chains of size 7-13, TS2 (NoPE) obtains higher or comparable accuracy than GPT-4 across the standard and randomly flipped chains. Its accuracy decreases for chains of length 14-15 (0.85 for standard chains and 0.78 for randomly flipped chains) but is still significantly higher than that of LMs like Gemini-Pro and Phi-3. Note that a random prediction would yield a 50% accuracy, indicating that the axiomatically-trained TS2 (NoPE) model can generalize its reasoning to causal chains much longer than 6 even though it was trained only on chains upto length 6.

Node Name Shift: For models trained on TS2 dataset, we also evaluate generalization to changes in variable names (Figure 3). We find that TS2 (NoPE) is robust to node name changes and retains

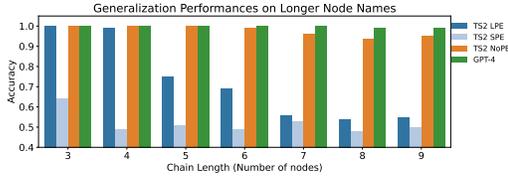


Figure 3: Evaluating generalization on causal sequences with longer node names (than the ones used in sequences in train set), and the impact of different PEs for TS-2 training set, which yields the best performance

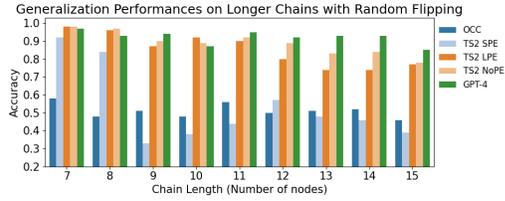


Figure 4: Generalizing to longer unseen causal sequences (>6 nodes) with random flipping using TS2 and OCC (with NoPE) training sets. OCC-trained models struggle due to limited edge-level variability, while TS2 NoPE consistently performs well, with GPT-4 being the best

its high accuracy as new, longer names are introduced. It also retains its generalizability to longer sequences with new node names, performing similarly to GPT-4.

Order of Causal Sequences: We now consider how variations in the causal structure impact generalization of axiomatically-trained models. In Table 2b, we consider the complex evaluation setup $\text{MultiEval}_{\text{SLR}}$ that includes shuffled order of causal sequences with random flipping for increasing length (even beyond the ones in train set). On this task, TS2 (NoPE) obtains higher accuracy than Gemini Pro and Phi-3 on chains of length up to 8. At length 9, TS2 (NoPE) obtains 0.73 accuracy which is comparable to Gemini Pro (0.74) and significantly better than random.

We observe a similar pattern for evaluation on completely reversed sequences in Table 2a.

This is an extreme case of out-of-distribution data since most causal edges are left-to-right in the training data whereas the test data contains all right-to-left edges. On this task, our axiomatically trained model TS2 (NoPE) outperforms GPT-4 when restricted to chain lengths of 3-6. In particular, its accuracy (0.94 for chains of length 6) is substantially higher than Gemini Pro and Phi-3 (0.62 and 0.69 respectively).

Branching: Finally, we consider the hardest evaluation task involving non-linear chains where we introduce general Erdos-Renyi graphs as the causal sequences while the training data contains only linear chains. Here the length of sequence corresponds to the number of nodes in the graph and we study the performance differences as the branching factor is varied. While GPT-4 obtains the best accuracy across increasing graph sizes, our TS2 (NoPE) model obtains higher accuracy than Gemini Pro for all graph sizes except one. Even when evaluated on graphs with 12 nodes and 1.4 branching factor, the TS2 (NoPE) model obtains 70% accuracy, significantly better than random (50%). Note that the training data only included graphs with a branching factor of 1.

Summary: Across all evaluation setups, our axiomatically trained model TS2 (NoPE) performs significantly better than random baselines even as chain lengths are increased beyond its training data. In particular, even though our model was not trained on fully reversed chains, it performs at par with the significantly larger GPT-4 model (Fig. 2). For other tasks, it often outperforms or matches the accuracy of billion-scale models like Gemini Pro and Phi-3. These results indicate that a model trained axiomatically can learn to reason about more complex causal structures from demonstrations of simple causal sequences. This suggests the potential of axiomatic training for reasoning over causal graphs.

5.2 Additional Results: Role of Data Diversity and Positional Encoding

Role of Positional Encodings. Comparing the performance of models wrt. choice of positional encoding, we find that models with no positional encoding generalize well to both longer lengths (upto chain length of 15) and complex, unseen graph structures, even though they are only trained on chains over 3-6 nodes. Models with SPE and LPE also perform well on longer chains but poorly

Table 2: Reversal and Shuffling

Model	3	4	5	6	Model Config	3	4	5	6	7	8	9
Baselines					Baselines							
GPT-4	0.97	0.99	0.98	0.92	GPT-4	<u>0.99</u>	0.97	0.89	0.85	0.95	0.90	0.90
Gemini Pro	0.61	0.59	0.66	0.62	Gemini Pro	0.75	0.73	0.72	0.76	0.71	0.68	0.74
Phi-3	0.80	0.69	0.73	0.69	Phi-3	0.88	0.86	0.82	0.79	0.76	0.73	<u>0.79</u>
Axiomatic Training					Axiomatic Training							
TS1 w NoPE	0.98	0.99	0.92	0.91	TS1 NoPE	1.00	0.94	<u>0.87</u>	<u>0.84</u>	0.80	0.76	0.73
TS1 w SPE	1.00	0.99	0.99	0.97	TS1 LPE	1.00	<u>0.95</u>	<u>0.87</u>	0.83	0.78	<u>0.78</u>	0.71
TS2 w NoPE	<u>0.99</u>	0.99	0.95	0.94	TS1 SPE	1.00	0.94	<u>0.86</u>	0.83	0.76	0.73	0.68
TS2 w SPE	0.98	0.97	0.93	0.94	TS2 NoPE	1.00	<u>0.95</u>	<u>0.87</u>	<u>0.84</u>	0.79	0.76	0.73
TS2 w LPE	<u>0.99</u>	<u>0.98</u>	0.95	0.97	TS2 w LPE	1.00	0.94	<u>0.87</u>	<u>0.84</u>	0.80	0.76	0.73
OCC w NoPE	0.33	0.18	0.10	0.09	TS2 w SPE	<u>0.99</u>	0.94	0.89	<u>0.84</u>	0.75	0.74	0.49
					OCC w NoPE	0.69	0.62	0.57	0.54	0.57	0.53	0.52

(a) Following [6], we evaluate models on inferring cause-and-effect from fully reversed sequences absent in training data. Models trained on OCC perform worse, highlighting the importance of edge-level perturbations for generalization. Accuracy metric is reported, with random baseline = 0.5

(b) Evaluated on **MultiEval_{SLR}** setup defined in 4.1.2. Models trained on TS1 and TS2 with NoPE and LPE perform well across all sequence lengths (even those which were not in the train set) while models trained with SPE or on OCC face generalization failures. Accuracy metric is reported wherein random baselines would yield 0.5.

Model	5		8		10		12	
	BF=2	BF=1.4	BF=2	BF=1.4	BF=2	BF=1.4	BF=2	BF=1.4
Baselines								
GPT-4	0.98	0.95	0.91	0.90	0.84	0.88	0.82	0.86
Gemini Pro	0.77	0.74	0.72	0.76	0.71	0.73	0.73	0.71
Phi-3	<u>0.87</u>	0.83	<u>0.82</u>	<u>0.79</u>	<u>0.77</u>	<u>0.77</u>	<u>0.75</u>	<u>0.80</u>
Axiomatic Training								
OCC w NoPE	0.52	0.51	0.53	0.52	0.52	0.55	0.49	0.47
TS1 w LPE	0.79	0.84	0.71	0.76	0.68	0.69	0.65	0.65
TS1 w SPE	0.72	0.79	0.63	0.64	0.56	0.61	0.52	0.59
TS1 w NoPE	0.77	0.84	0.73	0.76	0.68	0.70	0.62	0.66
TS2 w LPE	0.72	0.80	0.61	0.71	0.62	0.63	0.56	0.63
TS2 w SPE	0.52	0.70	0.49	0.49	0.49	0.49	0.51	0.52
TS2 w NoPE	0.83	<u>0.86</u>	0.74	0.77	0.69	0.74	0.64	0.70

Table 3: Evaluated on branched graphs created using Erdős-Rényi model, with varying branching factors (calculated by number of edges/number of nodes). Decoder model remains the same across all setups (67 Million parameter), accuracy metric is used, with random baseline performance = 0.5

when node names’ length increases, even for chains with smaller number of nodes (Figure 3). This generalization failure using SPE and LPE highlights the models’ inability to handle minor perturbations in the sequences present in their training set. Moreover, SPE does not perform well across different structural dimensions like branching, and order-based settings such as shuffling and reversal. Learnable PE performs well up to 9-length linear chains but drops sharply afterward. Overall, our results extend earlier work on the utility of NoPE [17, 13] to the task of understanding causal sequences and generalizing to both longer length and complex structure at test time.

Note that for the evaluation setup with randomly flipped edges, all types of PEs perform well. This may be due to the fact that the maximum effective length of a directed path between any two nodes is very small in randomly flipped sequences (much smaller than that of sequential causal chains) because the probability of an edge being forward directed is 0.5, and as we move across all sequential edges, the probability keeps on decreasing as 0.5^l where l is length of path.

Importance of Data Perturbations: In addition to the positional encoding, diversity of the sequences in train data plays an important role. Model trained on only causal chains (OCC) generalize to longer chains (Table 1) but not to other DAG structures (see Figure 4 for edge flip, Figure 2 for reversal, Table 3 for branching). Models trained on TS1 or TS2 generalize across all scenarios, including random flip, order permutations, and branching; thus highlighting the impact of incorporating variability

at the edge level through random flipping. However, across tasks, we find that TS2 yields higher accuracy than TS1, even as TS1 has more variations due to random flipping. This suggests that while perturbations aid structural generalization, excessive perturbations can hinder it (in particular, random flipping may decrease the length of available causal paths during training).

6 Inferring Causation from Correlation using Axiomatic Training

While the above study evaluated transformers’ capability to generalise the transitivity axiom from small causal chains to large graphs, we now study whether this capability transfers to other causal tasks.

To this end, we apply axiomatic training to a task on inferring causation from statements about correlation in observational data [16]. As Figure 5 shows, each data instance includes correlational relationships described in natural language for graphs with 3 to 6 nodes; and the goal is to infer the truth value of a *hypothesis* (of 6 different types: Parent, Ancestor, Child, Descendant, Collider, Confounder) on whether there exists a direct or indirect relationship between any given nodes, and possible presence of colliders and confounders.

This task is significantly harder than applying the transitivity axiom. First, there are multiple hypothesis types to evaluate: direct effect, indirect effect, children, ancestors, colliders and confounders. Second, solving the task requires an understanding of d-separation and the Markov property. Specifically, it involves mapping correlational statements to multiple possible causal graphs and determining if the query is satisfied across all graphs in the Markov Equivalence Class.

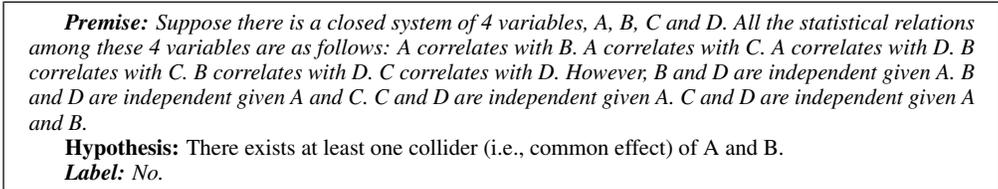


Figure 5: Example instance from [16] dataset describing correlational relationships of a 4 node system followed by a hypothesis to be verified.

Model Training: We use the same model architecture as in Section 4.2 and train our model from scratch for 100 epochs using NoPE, since it performed consistently well across diverse OOD settings in our transitivity-based experiments. For creating a train set, we consider the subset of the original dataset with correlational statements for graph consisting of 3 and 4 nodes. As the test set, we evaluate the model’s performance directly on 5 node correlational statements.

To aid generalization, we take inspiration from our transitivity-based experiments and create different combinations of randomly created alphanumeric node names. We then derive a training set from the original dataset by instantiating the correlational statements with different combinations of alphanumeric node names. We balance the dataset by sampling equally from both classes to avoid bias in our transformer model to get a train set with 113k instances. Then, we create a test set with 1000 randomly sampled instances of correlational statements for 5-node graph networks. Since the correlational statements are not simplistic unlike the premise from our transitivity experiments, we tokenize at the character level for nodes. For a straightforward evaluation, we tokenize all input text at the token level and use the same node names for evaluation as in the training set to avoid potential out-of-vocabulary issues.

Model	Precision	Recall	F1 Score	Accuracy
Ours	0.72	0.50	0.59	0.64
Phi-3	0.52	0.60	0.56	0.52
Gemini pro	0.52	0.59	0.55	0.52
GPT-4	0.59	0.50	0.54	0.58

Table 4: Extension to ‘Correlation to Causation’ Experiments from [16]. Results indicate that transformer models trained on correlational statements of smaller causal structures demonstrate some generalization capabilities when tested on more complex causal structures. These models outperform significantly larger baseline models like GPT-4

Comparison with Baselines: As reported in [16], due to the complexity of the task, we find that pre-trained LMs such as Gemini Pro and Phi-3 perform similar to a random guess (52% accuracy, see Table 4). While GPT-4 does perform slightly better, its performance is still low (58% accuracy). Remarkably, our small transformer model performs better than all baselines with 64% accuracy; 6% points higher than GPT-4. With further exploration of different training setups, axiomatically-trained transformer models may be optimised further for such causal reasoning tasks.

7 Discussion and Conclusion

In this work, we use the formal axiomatic framework proposed by [11] to study whether transformers can be taught causal axioms. To this end, we provide a method to create training data containing diverse demonstrations of an axiom and explore modelling choices to learn the axiom. We find that a transformer model trained from scratch can learn how to apply an axiom based on a large training dataset containing axiomatic demonstrations. We evaluate the proposed axiomatic training approach on two causal tasks—graph traversal using the transitivity and inferring causal relationship from correlational statements. For these tasks, small 67M transformers trained using our approach can generalize over longer and complex complex graph structures that they never saw during training, often providing accuracy better than existing LLMs such as GPT-4, Phi-3 and Gemini Pro.

Applicability to Causal Tasks. While our current work focuses on the transitivity axiom for causal relevance, extending the work to other causal axioms from [11] is an interesting research direction. In addition, we may consider other axioms that are relevant for downstream tasks such as effect inference. For example, if a transformer model can be trained to validate the d-separation rule—given two variables X and Y , are they independent given a variable set Z ?—then repeated applications of the rule can be used to derive a backdoor set. Another interesting direction is to extend the training approach for both deterministic and probabilistic causal models.

Generalization to Logical Reasoning. While we focused on causal reasoning axioms, our axiomatic training approach is general and can be applied to any formal system based on axioms. For instance, the same axiomatic training procedure can be used for teaching LMs logical reasoning tasks such as deductive reasoning. For instance, recent work [25] evaluates the deductive reasoning capabilities of LLMs and measures their generalization abilities along depth, width, and compositional abilities. As the depth increases, performance of LLMs deteriorates. It will be interesting to see whether axiomatic training can be applied to learn deductive reasoning axioms and improve the reasoning abilities of LMs.

Implications for Training Language Models. GPT-4 shows impressive generalization on the causal tasks we evaluated, even though it was not trained specifically for these tasks. A fundamental question is how LLMs like GPT-4 achieve the capability to reason over causal graphs. Based on our preliminary experiments, we conjecture that axiomatic training may be one explanation for GPT-4’s ability. While GPT-4 was not trained specifically for the causal tasks, the underlying axioms may have been present in diverse forms in its web-scale training data (e.g., in books, blogs, and technical forums) that helped it learn the causality rules.

At the same time, performance of other LMs such as Gemini Pro and Phi-3 can be improved. For instance, inability of Gemini Pro and Phi-3 to reason over completely reversed chains (even when their length was small) highlights how zero-shot reasoning for causal tasks is missing in these models. Incorporating causal axiom demonstrations as a part of language models’ pretraining could help improve the reasoning of these models, so that even small language models like Phi-3 can perform comparably to GPT-4 for causal tasks.

8 Acknowledgements

We would like to thank Kabir Ahuja for his helpful insights and suggestions for this work.

References

- [1] Phi-3 technical report: A highly capable language model locally on your phone, 2024.
- [2] Gemini: A family of highly capable multimodal models, 2024.
- [3] Gpt-4 technical report, 2024.
- [4] Taiyu Ban, Lyvzhou Chen, Xiangyu Wang, and Huanhuan Chen. From query tools to causal architects: Harnessing large language models for advanced causal discovery from data. *arXiv preprint arXiv:2306.16902*, 2023.
- [5] Elias Bareinboim, Juan Correa, Duligur Ibeling, and Thomas Icard. On pearl’s hierarchy and the foundations of causal inference (1st edition). In Hector Geffner, Rita Dechter, and Joseph Halpern, editors, *Probabilistic and Causal Inference: the Works of Judea Pearl*, pages 507–556. ACM Books, 2022.
- [6] Lukas Berglund, Meg Tong, Max Kaufmann, Mikita Balesni, Asa Cooper Stickland, Tomasz Korbak, and Owain Evans. The reversal curse: LLMs trained on "a is b" fail to learn "b is a", 2024.
- [7] Satwik Bhattamishra, Kabir Ahuja, and Navin Goyal. On the ability and limitations of transformers to recognize formal languages, 2020.
- [8] Gabor Csardi and Tamas Nepusz. *The igraph software package for complex network research*, 2006. URL <http://igraph.org>. InterJournal, Complex Systems, 1695.
- [9] Róbert Csordás, Kazuki Irie, and Juergen Schmidhuber. The devil is in the detail: Simple tricks improve systematic generalization of transformers. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih, editors, *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 619–634, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.49. URL <https://aclanthology.org/2021.emnlp-main.49>.
- [10] Daniel Furrer, Marc van Zee, Nathan Scales, and Nathanael Schärli. Compositional generalization in semantic parsing: Pre-training vs. specialized architectures, 2021.
- [11] David Galles and Judea Pearl. Axioms of causal relevance. *Artificial Intelligence*, 97(1):9–43, 1997. ISSN 0004-3702. doi: [https://doi.org/10.1016/S0004-3702\(97\)00047-7](https://doi.org/10.1016/S0004-3702(97)00047-7). URL <https://www.sciencedirect.com/science/article/pii/S0004370297000477>. Relevance.
- [12] Suriya Gunasekar, Yi Zhang, Jyoti Aneja, Caio César Teodoro Mendes, Allie Del Giorno, Sivakanth Gopi, Mojan Javaheripi, Piero Kauffmann, Gustavo de Rosa, Olli Saarikivi, Adil Salim, Shital Shah, Harkirat Singh Behl, Xin Wang, Sébastien Bubeck, Ronen Eldan, Adam Tauman Kalai, Yin Tat Lee, and Yuanzhi Li. Textbooks are all you need, 2023.
- [13] Adi Haviv, Ori Ram, Ofir Press, Peter Izsak, and Omer Levy. Transformer language models without positional encodings still learn positional information. In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang, editors, *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 1382–1390, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.findings-emnlp.99. URL <https://aclanthology.org/2022.findings-emnlp.99>.
- [14] Dieuwke Hupkes, Verna Dankers, Mathijs Mul, and Elia Bruni. Compositionality decomposed: how do neural networks generalise?, 2020.
- [15] Zhijing Jin, Yuen Chen, Felix Leeb, Luigi Gresele, Ojasv Kamal, Zhiheng Lyu, Kevin Blin, Fernando Gonzalez Adauto, Max Kleiman-Weiner, Mrinmaya Sachan, and Bernhard Schölkopf. Cladder: Assessing causal reasoning in language models, 2024.
- [16] Zhijing Jin, Jiarui Liu, Zhiheng Lyu, Spencer Poff, Mrinmaya Sachan, Rada Mihalcea, Mona Diab, and Bernhard Schölkopf. Can large language models infer causation from correlation?, 2024.

- [17] Amirhossein Kazemnejad, Inkit Padhi, Karthikeyan Natesan Ramamurthy, Payel Das, and Siva Reddy. The impact of positional encoding on length generalization in transformers. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 24892–24928. Curran Associates, Inc., 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/4e85362c02172c0c6567ce593122d31c-Paper-Conference.pdf.
- [18] Emre Kıcıman, Robert Ness, Amit Sharma, and Chenhao Tan. Causal reasoning and large language models: Opening a new frontier for causality. *arXiv preprint arXiv:2305.00050*, 2023.
- [19] Andrew Lampinen, Stephanie Chan, Ishita Dasgupta, Andrew Nam, and Jane Wang. Passive learning of active causal strategies in agents and language models. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 1283–1297. Curran Associates, Inc., 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/045c87def0c02e3ad0d3d849766d7f1e-Paper-Conference.pdf.
- [20] Bai Li, Changyou Chen, Wenlin Wang, and Lawrence Carin. Certified adversarial robustness with additive noise, 2019.
- [21] Yuanzhi Li, Sébastien Bubeck, Ronen Eldan, Allie Del Giorno, Suriya Gunasekar, and Yin Tat Lee. Textbooks are all you need ii: phi-1.5 technical report, 2023.
- [22] Stephanie Long, Alexandre Piché, Valentina Zantedeschi, Tibor Schuster, and Alexandre Drouin. Causal discovery with language models as imperfect experts. In *ICML 2023 Workshop on Structured Probabilistic Inference & Generative Modeling*, 2023.
- [23] Santiago Ontañón, Joshua Ainslie, Vaclav Cvicek, and Zachary Fisher. Making transformers solve compositional tasks, 2022.
- [24] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2018. URL <https://d4mucfpksywv.cloudfront.net/better-language-models/language-models.pdf>.
- [25] Abulhair Saparov, Richard Yuanzhe Pang, Vishakh Padmakumar, Nitish Joshi, Seyed Mehran Kazemi, Najoung Kim, and He He. Testing the general deductive reasoning capacity of large language models using ood examples, 2023.
- [26] Ruoqi Shen, Sébastien Bubeck, Ronen Eldan, Yin Tat Lee, Yuanzhi Li, and Yi Zhang. Positional description matters for transformers arithmetic, 2023.
- [27] Trieu H. Trinh, Yuhuai Wu, Quoc V. Le, He He, and Thang Luong. Solving olympiad geometry without human demonstrations. *Nature*, 625(7995):476–482, 2024. doi: 10.1038/s41586-023-06747-5. URL <https://doi.org/10.1038/s41586-023-06747-5>.
- [28] Aniket Vashishtha, Abbavaram Gowtham Reddy, Abhinav Kumar, Saketh Bachu, Vineeth N Balasubramanian, and Amit Sharma. Causal inference using llm-guided discovery, 2023.
- [29] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need, 2023.
- [30] Moritz Willig, Matej Zečević, Devendra Singh Dhami, and Kristian Kersting. Probing for correlations of causal facts: Large language models and causality. 2022.
- [31] Matej Zečević, Moritz Willig, Devendra Singh Dhami, and Kristian Kersting. Causal parrots: Large language models may talk causality but are not causal, 2023.
- [32] Yi Zhang, Arturs Backurs, Sébastien Bubeck, Ronen Eldan, Suriya Gunasekar, and Tal Wagner. Unveiling transformers with lego: a synthetic reasoning task, 2023.

Appendix

Query Type (Train/Eval)	Data Instance Example (Premise-Hypothesis-Label)	Structure Type	Network Size (number of nodes)
Train	Mhb causes iqB. iqB causes G. Does G cause iqB?: No	Short Linear Sequence	3-6
Train	N5w causes s. 6D causes s. Does N5w cause s?: Yes	Short Sequence with Random Flipping	3-6
Eval	w3 causes ROv. w3 causes tQC. H causes ROv. H causes tQC. b causes ROv. b causes w3. b causes H. Does tQC cause ROv?: No	Branching	5,8,10,12
Eval	LKk causes 5Ov. Kk causes L0. L0 causes KWO. 5Ov causes c. Does KWO cause L0?: No	Shuffled Sequences	3-9
Eval	FDAH26mV7 causes 7tzaIHjlY. 7tzaIHjlY causes 0kspcX95Im. 0kspcX95Im causes 7rhFSIx2o9. 7rhFSIx2o9 causes IPIG5LHVqp. Does FDAH26mV7 cause 7tzaIHjlY?: Yes	Sequences with Longer Node Names	3-9
Eval	r causes rZ. rZ causes L. L causes bUx. bUx causes Pbr. Pbr causes 1w. 1w causes c3. c3 causes yBQ. yBQ causes yK. yK causes w. w causes P. P causes kH. kH causes 1u. 1u causes jV7. jV7 causes i. Does r cause rZ?: Yes	Long Linear Sequences	7-15
Eval	rU6 causes eF. eF causes ivC. 3R causes ivC. 3R causes A8. 2 causes A8. 2 causes i. i causes a03. y causes a03. b causes y. b causes h. h causes yN. ic0 causes yN. ic0 causes Hd. Hd causes U. Does rU6 cause eF?: Yes	Long Sequences with Random Flipping	7-15

Table A1: Table with examples of data instances of different causal structural networks used for training and evaluating models. Each instance is broken down into premise, hypothesis, and label. During evaluation, only the premise followed by the corresponding hypothesis is provided, whereas during training of transformer, the model is trained on the loss of prediction of the label token.