

Towards Systematic Monolingual NLP Surveys: GenA of Greek NLP

Juli Bakagianni

gbakagianni@uoi.gr

Dept. of Computer Science & Engineering,
University of Ioannina, Greece

Kanella Pouli

kanella@athenarc.gr

Institute for Language and Speech
Processing, Athena RC, Greece

Maria Gavriilidou

maria@athenarc.gr

Institute for Language and Speech
Processing, Athena RC, Greece

John Pavlopoulos*

annis@aueb.gr

Dept. of Informatics, Athens University of
Economics and Business, and
Archimedes/Athena RC Greece

Natural Language Processing (NLP) research has traditionally been predominantly focused on English, driven by the availability of resources, the size of the research community, and market demands. Recently, there has been a noticeable shift towards multilingualism in NLP, recognizing the need for inclusivity and effectiveness across diverse languages and cultures. Monolingual surveys have the potential to complement the broader trend towards multilingualism in NLP by providing foundational insights and resources necessary for effectively addressing the linguistic diversity of global communication. However, monolingual NLP surveys are extremely rare in literature. This study fills the gap by introducing a method for creating systematic and comprehensive monolingual NLP surveys. Characterized by a structured search protocol, it can be used to select publications and organize them through a taxonomy of NLP tasks. We include a classification of Language Resources (LRs), according to their availability, and datasets, according to their annotation, to highlight publicly-available and machine-actionable LRs. By applying our method, we conducted a systematic literature review of Greek NLP from 2012 to 2022, providing a comprehensive overview of the current state and challenges of Greek NLP research. We discuss the progress of Greek NLP and outline encountered Greek LRs, classified by availability and usability. As we show, our proposed method helps avoid common pitfalls, such as data leakage and contamination, and to assess language support per NLP task. We consider this systematic literature review of Greek NLP an application of our method that showcases the benefits of a monolingual NLP survey. Similar applications could be regard the myriads of languages whose progress in NLP lags behind that of well-supported languages.

1. Introduction

Natural Language Processing (NLP) focuses on the computational processing of human languages, enabling machines to understand and generate natural language. Recently, several NLP tasks have advanced significantly with the help of Deep Learning (DL) (Devlin et al. 2019) and more recently with

* Corresponding author

Large Language Models (LLMs) (Brown et al. 2020). Multilingual NLP has benefited from these advances (Pires, Schlinger, and Garrette 2019). By focusing, however, on progress per language, we observe that well-supported languages benefit considerably more compared to the rest. As a result, NLP for the myriad of languages worldwide relies heavily on research conducted for well-established languages, often inheriting their assumptions, biases, and other characteristics that may not align with the unique features of languages such as Greek.¹²

In this paper, we present a method for creating extensive and systematic monolingual NLP surveys, applying the method specifically to the Greek language. The method defines a clear search protocol to systematically select the publications to be surveyed. Additionally, we introduce a taxonomy of NLP tasks to organize and present the material coherently, and we provide two classification schemes for Language Resources (LRs) based on their availability and annotation type. These schemes help identify publicly-available and machine-actionable datasets, which can be used to pre-train, fine-tune, and assess NLP models without inheriting assumptions and biases from well-supported languages. We applied this framework to Greek, examining over a thousand research studies on Greek NLP published from 2012 to 2022, and closely investigating 122 of these studies that met specific criteria defined in our search protocol. By following the NLP task taxonomy, we describe the NLP thematic areas addressed in the surveyed papers, the Language Models (LMs) and methods used by the authors, and the evolution of methods from traditional Machine Learning (ML) to DL approaches. We also discuss the datasets, and lexical resources, providing a comprehensive overview of existing Greek LRs.

In what follows, first we provide the background of the present work (§2). Specifically, we discuss the support level of human languages within the NLP community and the characteristics of the Greek language (§2.1). Also, we discuss the examined time frame along with an exploration of the methodological shifts occurring during this time period (§2.2), and we present the related work (§2.3). Then, we present our approach (§3), consisting of the search protocol (§3.1), and the taxonomies adopted for tasks and LRs availability and annotation type (§3.2). Subsequently, we present the main outcomes of our study, organized by NLP thematic areas: Machine Learning for NLP (§4), Syntax and Grammar (§5), Semantics (§6), Information Extraction (IE) (§7), Sentiment Analysis (SA) (§8), Authorship Analysis (§9), Ethics and NLP (§10), Question Answering (QA) (§11), Machine Translation (MT) (§12), and NLP Applications not classifiable in any of the previous tracks (§13). Lastly, we discuss the outcomes of this study with remarks on the limitations, and our final observations (§14), followed by our conclusions. Each of the sections presenting the main outcomes of this survey (§4-§13) is structured as follows: first we describe the track within its international global context; then, we discuss the methods identified by our study and the LRs produced; finally, each section concludes with a summary of the track and relevant observations.

2. Background

2.1 The Language

2.1.1 Human Languages. Human languages encompass a rich tapestry, totalling to 7,916, as catalogued by ISO 639-3.³ Despite this linguistic diversity, the landscape of Natural Language Processing (NLP) research remains extremely imbalanced, with English being the dominant language under research in this domain. To validate this observation, we aim to assess the level of support for different human

¹ With the term Greek we refer to the Modern Greek language (see §2.1.2).

² Transfer learning from other languages to Greek is possible by (pre-)training or fine-tuning machine-actionable and publicly-available Greek datasets. Such datasets, however, are scarce or ignored by the relevant literature.

³ ISO 639-3 is an international standard that assigns unique codes to represent language names. At the time of writing, it covers living, extinct, ancient, historic and constructed languages.

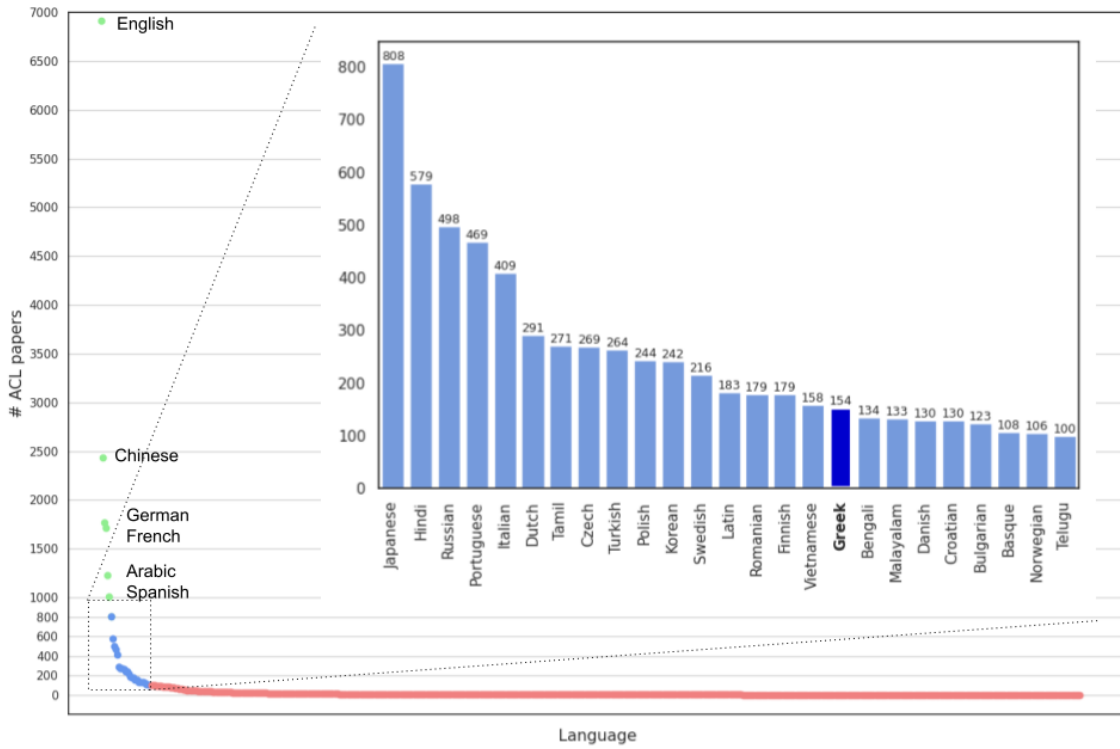


Figure 1

Number of studies in ACL Anthology per language shown vertically, with languages referenced in the title or abstract listed horizontally. We use the collection of languages outlined in the Internet Engineering Task Force Best Current Practice (BCP) 47 language tag (RFC 5646). The vast majority of languages appear in either none (7,312) or up to 100 studies (574), depicted with a long tail on the right of the image at the background. We refer to this group of languages as 3rd tier. Focalised, inside that image, are languages of the 2nd tier, occurring in more than 100 and less than 1,000 studies, with Greek appearing in 154 studies. The 1st tier comprises languages occurring in more than 1,000 studies each: English (referenced in 6,915 studies), Chinese (in almost 2,500), German and French (around 1,750), Arabic (1,229), and Spanish (1,011).

languages within the NLP community. An indicator of a language's support level is the number of NLP-related scientific publications available for that language. To measure this, we parsed the ACL Anthology, the most well-known hub for computational linguistics and NLP research, counting papers published between January 2012 and January 2024, that reference each language in the title or abstract.

Our analysis (see Figure 1) confirms English as the most studied language, with 6,456 papers focusing on it. Furthermore, as it is a common practice within the NLP community to omit explicitly mentioning the language when the research pertains to English (Bender 2019), it is safe to claim that the number of papers with research conducted for the English language is even higher. Following English, Chinese, German, French, Arabic, and Spanish are also well-supported, each having thousands of research papers published within the same period. In the second tier of languages, including Greek, are the moderately-supported languages, with publication counts ranging from 100 to 1,000. Finally, 574 languages fall into

the lowest tier, with between one and 100 publications, while the remaining 7,312 languages have no publications dedicated to them.

Given our focus on Greek, we turn our attention to the subset of languages in the second tier, comprising a total of 25 languages. These languages exhibit a moderate level of interest from the NLP research community, as evidenced by their 100-1,000 references (Figure 1). Among these languages, Greek ranks 17th, with 154 papers referencing it. However, when considering the total speaker populations (including both native and second language speakers) of each language,⁴ Greek moves up to the 10th position among the 25 languages analyzed. This adjustment accounts for both the level of support each language receives and the size of its speaker base, providing a more nuanced perspective on the relative position of Greek within this tier.

2.1.2 The Greek Language. Understanding the linguistic characteristics of a language can help NLP researchers understand the specific challenges and opportunities for developing and applying NLP technologies in this language context. Greek, or Modern Greek, to distinguish it from previous stages of the language's history, is the official language of Greece and one of the two official languages of Cyprus. It is the mother tongue of approximately 95% of the 10.5 million inhabitants of Greece and of the approximately 500,000 Greek Cypriots. It is also used by approximately 5 million people of Greek origin worldwide as heritage language (Gavriilidou et al. 2012). The Greek alphabet has been the main script for writing Greek for most of its recorded history. The use of the standard variety in education and mass media has led to the prevalence of standard Modern Greek over various dialects. Henceforth, the term “Greek” is used to refer to Standard Modern Greek, which is a highly inflected language. It has four cases for the nominal system, two numbers, and three genders. The verb conjugation system is even more complex, with multiple tenses, moods, voices, different suffixes per person, and many irregularities. Word length is an additional factor differentiating Greek from other languages, most notably English. The majority of the Greek words, typically, have two or three syllables, but words with more syllables (e.g., eight or nine) are also not rare (Gavriilidou et al. 2012).

2.2 The Time Period of the Survey

The selected time span for our survey (2012 to 2022) aimed to capture the evolution of research methodologies in NLP in response to global technological advancements and shifts in the field. The period under investigation witnessed a transition from Machine Learning (ML) to Deep Learning (DL).⁵ We aim to explore how this methodological shift influenced research on Greek. In the following sections we present a brief historical overview of the scientific field (i.e., by disregarding the target language) and its evolution over the years under study. The overview of the methods applied to the Greek language is outlined in §4.

2.2.1 The ML Era. The predominant approach to NLP research in 2012, marking the beginning of our study period, primarily relied on ML algorithms. ML focuses on developing algorithms and models capable of learning patterns and making predictions or decisions based on data. The key objective was to yield predictive models, learning from seen data and making accurate predictions on unseen data.

⁴ Speaker population data sourced from [Ethnologue](#). Support per speaker population was calculated by dividing language support by its speaker population. Latin, an extinct language, was excluded from this comparison.

⁵ “DL waves have lapped at the shores of computational linguistics for several years now, but 2015 seems like the year when the full force of the tsunami hit the major NLP conferences” (Manning 2015).

Feature engineering is a crucial step in traditional ML and was the classical first step in NLP prior to the domination of DL. Data scientists often need to manually extract, select, or engineer relevant features from raw data to improve model performance. Commonly employed features include character or word tokens (unigrams or n-grams) and their frequency, using methods like frequency counts or the Term Frequency - Inverse Document Frequency (TF-IDF) weighting scheme. Lexicon-based features, such as lists of words with specific meanings (e.g., sentiment lexicons), are also common.

2.2.2 The DL Era. The surge of DL in NLP can be attributed to its capacity to automatically learn hierarchical representations of data, eliminating the need for extensive feature engineering. This ability, coupled with the vast amounts of data and increased computational power, fueled the rise of DL, enabling more effective handling of complex linguistic structures and yielding superior performance across a spectrum of NLP tasks (Bommasani et al. 2021). These advancements facilitated the usage of Recurrent Neural Network (RNN) models (Pascanu, Mikolov, and Bengio 2013), initially proposed in the 80's (Rumelhart, Hinton, and Williams 1986; Elman 1990; Werbos 1988) for modeling time series. The RNN's network architecture allows for the exploration of temporal correlations between distant elements in the text. Pre-trained Language Models (PLMs) were the next wave of DL. The pre-training task is derived automatically from unannotated data in self-supervised learning. Self-supervised tasks are not only more scalable, depending only on unlabelled data, but they are designed to force the model to predict parts of the inputs, thus making them richer and potentially more useful than models trained on a more limited label space. An additional advantage of PLMs is their ability for transfer learning: a model is trained on a surrogate task (often just as a means to an end) and then adapted to the downstream task of interest via fine-tuning or prompting. Self-supervised learning techniques based on autoregressive language modeling (Dai and Le 2015), which involves predicting the next word given the previous words, gained popularity. These techniques gave rise to models such as GPT (Radford et al. 2018), ELMo (Peters et al. 2018), and ULMFiT (Howard and Ruder 2018). The next wave of self-supervised learning introduced models like BERT (Devlin et al. 2019) GPT-2 (Radford et al. 2019), RoBERTa (Liu et al. 1907), T5 (Raffel et al. 2020), and BART (Lewis et al. 2019), all of which embraced the Transformer architecture (Vaswani et al. 2017). The fascination with the inner workings of these large-scale Transformer-based models has led to the emergence of a trend known as BERTology.⁶

2.2.3 Technological Advancements. PLMs led to surprising developments due to their scale. For instance, GPT-3 (Brown et al. 2020), with 175 billion parameters compared to GPT-2's 1.5 billion, allows in-context learning, adapting to tasks by the provision of a prompt (a natural language description of the task). This property was neither specifically trained for nor anticipated to arise. An exemplary of PLM application is ChatGPT,⁷ fine-tuned from GPT-3.5, which applies reinforcement learning from human feedback, aligning Language Models (LMs) with human intent. Furthermore, multimodal PLMs, such as GPT-4 (OpenAI 2023), can handle text and images, performing at human-level. There's also a trend towards unified models that handle various data types. Notable examples in this category include OFA (Wang et al. 2022a), UNIFIED-IO (Lu et al. 2022), FLAVA (Singh et al. 2022), BEiT-3 (Wang et al. 2022b), and others.

⁶ <https://huggingface.co/docs/transformers/bertology>

⁷ <https://openai.com/blog/chatgpt>

2.3 NLP surveys

2.3.1 Other Greek NLP surveys. Regarding other Greek NLP surveys identified through our search protocol (§3.1), we found one brief survey paper focusing on Greek NLP and three surveys addressing NLP tasks tailored to specific domains. First, [Papantoniou and Tzitzikas \(2020\)](#) provided a brief survey of NLP for the Greek language covering Ancient Greek, Modern Greek, and dialects. This survey included the work of 99 papers published from 1990 to 2020. The authors addressed text, video, and image modalities. For text modality, they presented papers on tasks such as Phonology, Syntax, Semantics, Information Extraction (IE), Sentiment Analysis (SA), Argument Mining, Question Answering (QA), Machine Translation (MT), and NLP Applications. For image modality they outlined Optical Character Recognition (OCR), and for video modality, they referred to Lip Reading and Keyword Spotting. Regarding Language Resources (LRs), they presented a limited number of LRs, specifically three online lexica, five online corpora, two downloadable datasets, five tools, and one service.

The remaining three surveys are domain-specific. [Nikiforos et al. \(2021\)](#) provided an extensive review of 49 papers published from 2012 to 2020 related to the Social Web in Modern Greek, Greek dialects, and Greeklish script. The NLP tasks covered include Argument Mining, Authorship Attribution, Gender Identification, Offensive Language Detection, and SA. The authors systematically addressed the scientific contributions and unresolved issues of the reviewed papers. They also presented two tools and 21 datasets extracted from the surveyed papers, providing detailed information and links where available. [Alexandridis et al. \(2021\)](#) reviewed 14 papers published from 2014 to 2020 that focus specifically on SA and opinion mining in Greek social media. The authors discussed the methods, tools, datasets, lexical resources, and models used for SA and opinion mining in Greek texts. Finally, [Krasadakis, Sakkopoulos, and Verykios \(2022\)](#) surveyed 43 papers related to Legal NLP published from 2012 to 2021. The survey covered tasks such as Named Entity Recognition (NER), Entity Linking, Text Segmentation, Summarization, MT, Rationale Extraction, Judgment Prediction, and QA.

2.3.2 Monolingual NLP surveys in Other Languages. Moving beyond Greek, we found that NLP surveys for specific languages are rare. We confirmed this by searching the literature for NLP surveys or overviews that cover a wide range of NLP tasks, similar to our research, for well-referenced and moderately-referenced languages of the 1st and 2nd tiers (§2.1.1). Our search process involved querying Google Scholar for publications between January 2012 and September 2023. We employed a specific query pattern, searching for the name of the language of interest along with the keyword “Natural Language Processing”, and either “survey” or “overview”. Notably, we found that for only one out of four well- and moderately-supported languages monolingual surveys for NLP do exist. Specifically, from the six well-referenced languages, only Arabic, a macro-language encompassing various individual varieties, has NLP surveys ([Guellil et al. 2021](#); [Darwish et al. 2021](#); [Larabi Marie-Sainte et al. 2019](#); [Al-Ayyoub et al. 2018](#); [Shoufan and Alameri 2015](#)). And from the 25 moderately-referenced languages, seven have surveys, i.e. Hindi (preprint) ([Desai and Dabhi 2021](#)), Tamil ([Rajendran et al. 2022](#)), Turkish ([Oflazer 2014](#)), Finnish ([Hämäläinen and Alnajjar 2021](#)), Greek ([Papantoniou and Tzitzikas 2020](#)), Bengali (preprint) ([Alam et al. 2021](#)), and Basque ([Gonzalez-Dios and Altuna 2022](#)).

2.3.3 Limitations in Existing NLP Surveys. The surveys mentioned above provide valuable insights into the languages they study; however, none disclose the method they used for retrieving the surveyed papers. This lack of transparency hinders the understanding of the criteria and rationale behind the selection of the papers. Additionally, it is unclear whether the NLP tasks presented are comprehensive of the research conducted in the language or if the papers were manually selected to fit the chosen tasks. Similarly, while some surveys provide information about the LRs available for the examined language, it is

not always clear which LRs were selected, nor whether their availability is based on license, accessibility, and format readiness.

3. Our method

3.1 Search Protocol

3.1.1 The Search Strategy. We designed and conducted a thorough search strategy across several reputable scientific databases. Our aim was to identify research papers related to Natural Language Processing (NLP) for Greek, published from January 2012 to December 2022. The selected databases are: ACL Anthology,⁸ a hub for computational linguistics and NLP research; Semantic Scholar,⁹ an AI-powered search engine prioritizing computer science and related fields; and Scopus,¹⁰ a globally recognized database. These databases were chosen not only for their reputability but also for their automated publication retrieval capabilities: Semantic Scholar and Scopus offer APIs, while ACL Anthology provides publication metadata in XML format through its GitHub repository.¹¹

The search process involved three rounds, with the first two considered core rounds as outlined in Table 1. These rounds were conducted across ACL Anthology, Scopus, and Semantic Scholar on different dates, each using tailored query terms to accommodate the search capabilities of each database. Scopus allows searching in the title, abstract, and the entire paper content (including references), Semantic Scholar searches across the entire paper content, and ACL Anthology limits the search to the title and abstract. Therefore, we focused our search on the language name, i.e., “Greek” or “Modern Greek”, in the title or abstract of the papers and the term “Natural Language Processing” in the entire paper. This approach was chosen because papers focused on a specific language are likely to mention the language name in these sections, thereby reducing the retrieval of false positive papers (see §14.1). Specifically, Scopus employs Lucene queries, allowing us to search for the language name in titles and abstracts, and the term “Natural Language Processing” across the entire paper. Semantic Scholar does not offer specific search area options, so we used combined keywords with the +(AND) operator, initially searching broadly and subsequently filtering results where the language name appeared in the title or abstract. ACL Anthology, being dedicated to NLP, limited the search to the language name in the title or abstract.

The third round served as a supplementary phase for quality assurance of our search strategy and to validate the comprehensiveness of the selected query terms during the previous core search rounds. The objectives were two-fold: first, to verify that the selected queries terms retrieved all relevant publications related to NLP research in the Greek language; and second, to address any potential gaps from excluding Google Scholar¹² in the core rounds. Despite its widespread usage, Google Scholar was not included in the core rounds due to its lack of an API for automated publication retrieval. During this phase, we cherry-picked specific NLP downstream tasks, and integrated them as additional query terms alongside the language name and the overarching term “Natural Language Processing” in Google Scholar. Further details about this quality assurance check can be found in the Appendix 15.

3.1.2 Filtering. We retrieved a total of 1,577 bibliographic records, which reduced to 1,035 after removing duplicates. Each record included metadata such as the title, authors names, abstract, publication date,

8 <https://aclanthology.org/>

9 <https://www.semanticscholar.org/>

10 <https://www.scopus.com/home.uri>

11 <https://github.com/acl-org/acl-anthology>

12 <https://scholar.google.com/>

Table 1

The databases searched in each round, the query used to search each database, and the date or time frame the search took place.

ROUND	DATABASE	QUERY	SEARCH DATE
1ST	ACL Anthology	“Modern Greek” in title or abstract	1/11/2022
	Scopus	TITLE-ABS(({Modern Greek})) AND ALL(({Natural Language Processing}))	31/10/2022
	Semantic Scholar	Modern + Greek + Natural + Language + Processing and then “Modern Greek” in title or abstract	1/11/2022
2ND	ACL Anthology	“Greek” in title or abstract	26/3/2022
	Scopus	TITLE-ABS(({Greek})) AND ALL(({Natural Language Processing}))	26/3/2022
	Semantic Scholar	Greek + Natural + Language + Processing and then “Greek” in title or abstract	26/3/2022

and citations. Publication types were manually added when missing (e.g., conference paper, journal article, etc.). Publications not relevant to our study were discarded based on exclusion criteria that were both qualitative and quantitative. This process resulted in 122 papers being included in our survey, all of which were published within the selected timeframe.¹³ The exclusion criteria were established as follows:

- **Publication language;** all major NLP conferences and journals publish in English, hence studies written in other languages (including Greek) were disregarded;
- **Language of study;** with Modern Greek being the language of interest, both papers dedicated to monolingual (Greek specific) and multilingual (Greek inter alia) research were accepted; studies referring to older stages of the language (i.e., katharevousa), to geographical dialects, or to Greek Sign Language were not considered;
- **Subject area;** papers irrelevant to NLP were excluded;
- **Modality;** papers not studying textual data were not considered;
- **Publication venue;** only conference papers and journal articles were included, leaving out book chapters, theses, and preprints,
- **Number of citations;** we followed an arithmetic progression in terms of both the number of citations and the year of publication, beginning with 1 for papers published in 2022 and increasing with step one for each preceding year. In this sense, the demand for citations was higher for older publications than for more recent ones. Consequently, any paper falling below the defined citation threshold was excluded from our selection.¹⁴

¹³ We have identified 18 additional papers that are submissions to specific tasks. Only the top-ranked submissions for each task are cited in our survey, so not all retrieved submissions are featured in the survey and are consequently excluded from the statistics.

¹⁴ We used Google Scholar to count citations, due to its high coverage.

3.1.3 Metadata Extraction. In addition to the metadata retrieved in previous steps, such as the number of Google Scholar citations and the publication type, we manually added information about the search process. This information includes the search date, the database queried, and the query used to retrieve the paper. We also classified the papers, distinguishing between research papers, overviews, shared task overviews, and submissions to shared tasks. Furthermore, we added information about the research tasks addressed by the authors (see §3.2.1 for the task taxonomy), the keywords used, and the languages covered. Regarding the Language Resources (LRs) created for each paper, we collected information about their availability (see §3.2.2 for the LR availability taxonomy), annotation type (see §3.2.2 for the LR annotation type classification scheme), size, linguality type (monolingual or bilingual), annotation type (if any), domain, and time coverage.

3.2 The Taxonomies

3.2.1 The Task Taxonomy. We employed the comprehensive task taxonomy proposed by Bommasani, Liang, and Lee (2023), following a data-driven approach that was aligned with the thematic tracks of the top NLP conference, i.e., ACL (2023).¹⁵ These tracks mirror the prevalent areas of study in NLP at the time of writing. Each retrieved publication was assigned to a specific NLP task to which the paper contributed; a list of canonical task names was defined, ensuring consistency. Studies that do not address a canonical task,¹⁶ were also assigned to the task they perform. Subsequently, each task was mapped to the associated conference track, and was assigned to thematic topics as proposed by ACL (2023). Table 2 illustrates the resulting taxonomy of NLP tasks for the Greek language.

In specific cases, our taxonomy diverged from the ACL classification. Specifically, we present Authorship Analysis separately from SA and Argument Mining, although there is a single ACL track for “Sentiment Analysis, Stylistic Analysis, and Argument Mining”. This decision was dictated by the fact that Authorship Analysis has attracted increased attention in the NLP community for Greek.

Additionally, we have identified studies that do not perform a “canonical” NLP task. Consolidation of historical revisions, for example, do not fall under a specific thematic domain, hence were appended under the NLP Applications.

3.2.2 The Language Resource Taxonomies. One of our survey objectives was to compile a comprehensive list of the LRs developed in the reviewed studies, including detailed metadata. This metadata includes the availability of the LR, ensuring it aligns with the FAIR Data Principles — findable, accessible, interoperable, and reusable (Wilkinson et al. 2016). Additionally, we assessed the annotation type of the datasets, which refers to the manner in which resources are annotated, impacting data quality, task suitability, reproducibility, and research transparency.

Availability taxonomy. The LRs availability classification scheme is based on three parameters: the presence of a functional URL, valid license information, and a machine-actionable format. We searched for the resources’ URLs from the papers in which they were created, without extending our search to other web sources. The scheme, presented in Table 3, classifies LRs availability into four distinct categories. The value “Yes” signifies resources with a valid, functional URL and an open license, such as Creative Commons. These datasets and lexica are also in a machine-actionable format (e.g., txt, csv, pkl). The

¹⁵ https://2023.aclweb.org/calls/main_conference/

¹⁶ We use the term canonical to refer to tasks with an established tradition in academia (e.g., internal audit text classification). Although we acknowledge that there is subjectivity in defining what “canonical” is, this is a solution that allows for a manageable task organisation.

Table 2

Taxonomy of NLP tasks for the Greek language, influenced by the ACL 2023 list of tracks. The numbers in parentheses indicate the number of papers contributing to each task.

TRACK	TASK
Authorship analysis	Authorship Verification (3), Author Profiling (3), Authorship Attribution (2), Author Identification (2), Author Clustering (1)
Ethics and NLP	Offensive Language Detection (4), Hate Speech Detection (3), User Content Moderation (2), Bullying Detection (1), Verbal Aggression Detection (1)
Information Extraction (IE)	Named Entity Recognition (NER) (4), Event Extraction (3), Entity Linking (2), Term Extraction (1), Open Information Extraction (1), Web Content Extraction (1)
Interpretability and Analysis of Models for NLP	Word-Level Translation Analysis in Multilingual Language Models (LMs), Polysemy Knowledge in Large Language Models (LLMs) (1), Bias Detection in LLMs (1)
Machine Learning for NLP	Language Modeling (1)
Machine Translation (MT)	Machine Translation (MT) Evaluation (6), Statistical Machine Translation (SMT) (2), Rule-Based MT (1)
Multilingualism and Cross-Lingual NLP	Multilingual Language Learning (1), Term Translations Detection (1), Language Distance Detection (1), Language Identification (1), Cross-Lingual Data Augmentation (1), Cross-Lingual Knowledge Transfer (1)
NLP Applications	Legal NLP (3), Business NLP (2), Educational NLP (1)
Question Answering (QA)	Question Answering (QA) (4)
Semantics	Distributional Semantic Modeling (4), Frame Semantics (2), Distributional Semantic Models Evaluation (1), Lexical Ambiguity (1), Semantic Annotation (1), Semantic Shift Detection (1), Word Sense Induction (1), Metaphor Detection (1), Paraphrase Detection (1)
Sentiment Analysis (SA) and Argument Mining	Document-Level Sentiment Analysis (SA) (13), Sentence-Level SA (10), Aspect-Based SA (3), Argument Mining (2), Stance Detection (1)
Summarization	Summarization (2)
Syntax and Grammatical Error Correction (GEC)	Grammatical Error Correction (GEC) (3), Sentence Boundary Detection (2), POS Tagging (2), Dependency Parsing (2), MWE Parsing (1), Tokenization (1), Lemmatization (1)

designation “Lmt” is used for LRs with limited availability, referring to resources with valid URLs but no license terms, resources provided upon request, or containing content such as tweets that may require payment. Their data format is machine-actionable, except for those available upon request, for which their format readiness could not be verified. The value “Err” signifies resources for which the authors provided URLs which were found to be inaccessible due to broken links or other HTTP errors. Lastly, the value “No” is assigned to resources for which the creators did not provide URLs.

Annotation Type Taxonomy. The classification scheme for annotation types includes six categories as outlined in Table 4. Manual annotations are performed by human annotators, offering high accuracy and often serving as gold standards. In contrast, automatic annotations are generated using algorithms

Table 3

LRs Availability Categories: Each category corresponds to specific criteria applied to the resource's URL, license and data format. For Lmt, where the LR is available upon request, the data format is unknown unless specified in the paper, indicated by the † in the data format.

AVAILABILITY	DESCRIPTION	PROVIDED URL	LICENSE	DATA FORMAT
YES	publicly available	valid	yes (open license)	machine-actionable
LMT	limited public available	valid	no license or available upon request or pay	machine-actionable†
ERR	publicly unavailable	invalid	n/a	n/a
NO	no information provided	no URL	n/a	n/a

or predefined rules, ensuring consistency and scalability. Hybrid annotations combine both manual and automatic methods, such as using a manually annotated test set alongside an automatically annotated training set. User-generated annotations come from real-world interactions, like hotel review ratings from users. Curated datasets feature metadata sourced from distributors, enriching datasets with structured information like topics from news articles or author details from publishers. Finally, the designation “No” Annotation refers to datasets that contain unprocessed text with no annotations.

Table 4

LRs Annotation Types: Each type indicates how annotations were added, reflecting varying levels of curation and automation.

ANNOTATION TYPE	DESCRIPTION
MANUAL	human annotation
AUTOMATIC	automatic annotation
HYBRID	manual and automatic annotation
USER-GENERATED	annotation from user edits, not curated
CURATED	metadata provided by distributor
NO ANNOTATION	no annotation

4. Machine Learning for NLP

4.1 Track Description

Machine Learning for Natural Language Processing (NLP) focuses on the integration of Machine Learning (ML) techniques to enhance the understanding, interpretation, and generation of human language by computers.

Interpretability and Analysis of Models for NLP is rooted to the rise of Deep Learning (DL), which has changed radically NLP. Neural Network (NN) became the dominant approach. However, their opaque nature poses challenges in interpreting their inner workings, leading to a surge in research dedicated to analyzing and interpreting NN models in NLP (Belinkov, Gehrmann, and Pavlick 2020).

4.2 Machine Learning for NLP in Greek: Language Models and Methods

4.2.1 ML vs DL approaches. The predominant approach to Greek NLP research back in 2012 relied primarily on ML algorithms. Given the morphological richness of the Greek language, feature engineering was a key step in traditional ML. Typically, a structured pipeline was followed for extracting additional features, such as Part of Speech (POS) tags, lemmas, and/or word stems. Additionally, features such as named entities, dependency trees, and, more recently, word embeddings were often extracted. The majority of the studies in this survey used features derived from frequency, such as n-grams and lexicons (used in 40 studies), or extracted information such as POS tags, lemmas, stems, named entities, or dependency trees (used in 27 studies). Furthermore, most methods that employ word embeddings also use additional features (11 out of 15).

DL-based approaches in Greek NLP began in 2017 with the introduction of Recurrent Neural Network (RNN)-based methods (Athanasίου and Maragoudakis 2017; Pavlopoulos, Malakasiotis, and Androutsopoulos 2017; Pavlopoulos et al. 2017) and (CNN)-based methods (Medrouk and Pappa 2017; Pavlopoulos, Malakasiotis, and Androutsopoulos 2017). RNN-based methods became prevalent in Greek NLP while when ML-based was compared to RNN-based approaches, the latter always outperformed the former (Pitenis, Zampieri, and Ranasinghe 2020; Arcila-Calderón et al. 2022).

Pre-trained Language Models (PLMs) extend back to the era of the pre-trained non-contextual word embeddings, which were widely used as features for both traditional ML and DL algorithms. Table 5 showcases the publicly accessible Greek PLMs developed for the purposes of the surveyed studies. Prokopidis and Piperidis (2020) trained fastText (Bojanowski et al. 2017) on newspaper articles and the Greek part of the w2c corpus (presented in §14.4). Similarly, Tsakalidis et al. (2018b) trained Word2Vec (Mikolov et al. 2013b) on political Greek tweets (§8). Subsequently, despite the shift in NLP literature towards contextual word embeddings employing self-supervised learning techniques based on autoregressive language modeling (Dai and Le 2015), these approaches were largely not adopted for Greek NLP, with the exception of the ELMo contextualized embeddings (Peters et al. 2018) used by Bartzioakas, Mavropoulos, and Kotropoulos (2020).

Transformers were used by PLMs in the subsequent wave of self-supervised learning, developed for the Greek language (Table 5). Among monolingual PLMs, GreekBERT (Koutsikakis et al. 2020) quickly became the standard in Greek NLP research, recognized as the state-of-the-art technique in various studies (Koutsikakis et al. 2020; Perifanos and Goutsos 2021; Alexandridis et al. 2022; Rizou et al. 2022; Bilianos 2022; Kapoteli, Koukaras, and Tjortjis 2022). Besides multilingual models also comprising Greek, such as XLM-RoBERTa (XLM-R) (Conneau et al. 2018), other monolingual Transformer-based PLMs for Greek are GreekSocialBERT (Alexandridis et al. 2021), which extends GreekBERT by being further trained on Greek social media data; RoBERTa-based PaloBERT (Alexandridis et al. 2021) and BERTaTweetGR (Perifanos and Goutsos 2021); and GPT-2 fine-tuned in Greek (Papadopoulos, Papadakis, and Matsatsinis 2021).

4.2.2 Interpretability and Analysis of Models for NLP. Studies concerning interpretability and analysis of NN models for Greek NLP are rather multilingual. Ahn and Oh (2021) investigated ethnic bias in BERT models for eight languages, including Greek, focusing on how do these models reflect historical and social contexts. They proposed mitigation methods and highlighted the language-specific nature of ethnic bias. Garí Soler and Apidianaki (2021) proposed a method to examine whether PLMs for multiple languages (incl. Greek) have knowledge of lexical polysemy, showing that they do.¹⁷ Gonen et al. (2020b) focused on multilingual BERT (mBERT), which is the multilingual version of BERT (Devlin et al.

¹⁷ The source code is available at <https://github.com/ainagari/monopoly>

Table 5

Monolingual Greek PLMs developed for the surveyed studies, including their availability (Yes: publicly available, Lmt: limited availability; tags are linkable; see Table 3 for details) and the backbone model they are based on.

AUTHORS	AVAILABILITY	BACKBONE
Papadopoulos, Papadakis, and Matsatsinis (2021)	Yes	GPT-2
Koutsikakis et al. (2020)	Yes	BERT
Prokopidis and Piperidis (2020)	Yes	fastText
Alexandridis et al. (2021)	Lmt	BERT
Alexandridis et al. (2021)	Lmt	RoBERTa
Perifanos and Goutsos (2021)	Lmt	RoBERTa
Tsakalidis et al. (2018b)	Lmt	Word2Vec

2019). Specifically, they revealed the inherent understanding of mBERT for word-level translations and its capacity of cross-lingual knowledge transfer, despite the fact that it is not explicitly trained on parallel data.¹⁸

4.3 Summary of Machine Learning for NLP in Greek

Historical route. Figure 2 shows the trends of Greek NLP approaches, categorized into traditional ML methods, DL methods, and other non-ML methods, such as rule-based systems. ML methods remained the dominant approach until 2019, with the exception of 2013 when other methods were favoured. From 2017 onwards, researchers began to use and compare both ML and DL approaches. As mentioned in §4.2, in 2017, the first publications employing DL techniques emerged, primarily focusing on RNN-based and CNN-based models, which accounted for approximately 30% of the total papers published that year. Since the release of GreekBERT (Koutsikakis et al. 2020), DL methodologies have surpassed traditional ML approaches. While ML methods still find applications, a significant portion of the studies employing ML techniques, integrate both ML and DL techniques in their research experiments.

The Large Language Model (LLM) era. Recently, NLP research is increasingly based on LLMs, with some of the most popular ones being either fully or partially closed-source (Balloccu et al. 2024). Notable examples for Greek include OpenAI’s GPT-3.5 and GPT-4.0 (Achiam et al. 2023), which are trained on multilingual data and can therefore process and generate texts in multiple languages, including Greek. Additionally, there are other multilingual LLMs available in open-source environments, such as XLM-R used by Ranasinghe and Zampieri (2021). New LLMs emerge regularly in multilingual and monolingual settings, such as GreekBART (Evdaimon et al. 2023), GreekT5 series of models (Giarelis, Mastrokostas, and Karacapilidis 2024), and Meltemi.¹⁹ Although covering all LLMs for Greek is beyond the scope of our study, we highlight the significance of GreekBERT, which has significantly impacted Greek NLP research since its introduction in 2020, leading to a shift from traditional ML to DL approaches.

¹⁸ The source code is available at <https://github.com/gonenhila/mbert>

¹⁹ <https://huggingface.co/ilsp/Meltemi-7B-v1>

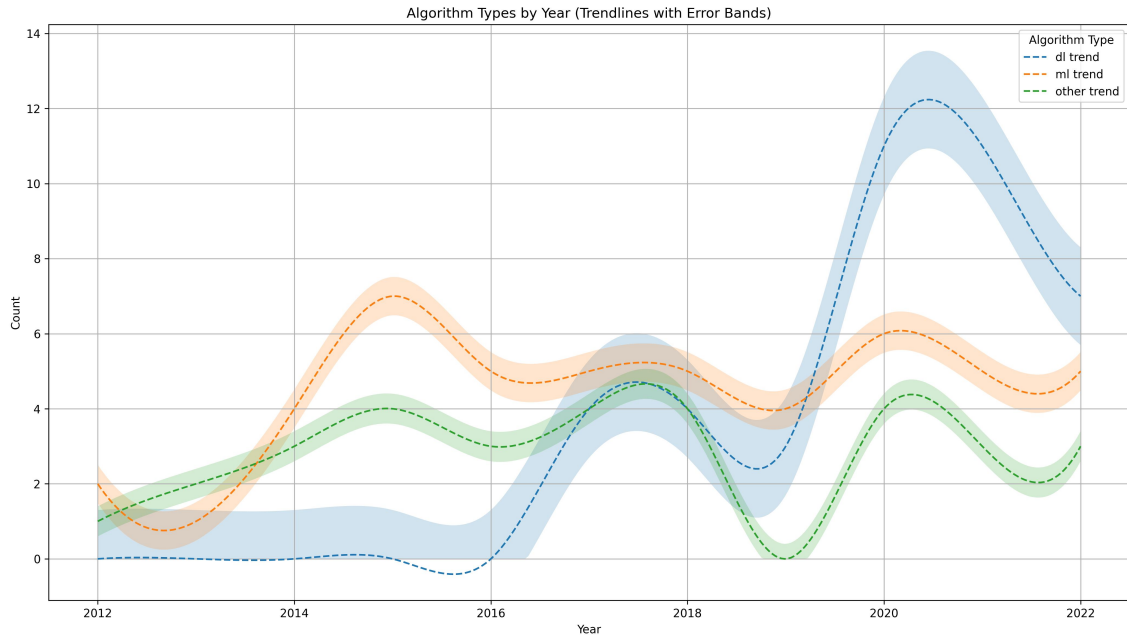


Figure 2
Frequency of NLP approaches (y axis: publications count) per year.

Methods per track. ML techniques dominate most of the topics, as can be seen in Figure 3. This is unsurprising especially given that our study covers a period from 2012, when DL approaches were not yet prevalent. Particularly noteworthy is the fact that there is a preference for DL techniques in Information Extraction (IE) (§7). However, this inclination aligns with another trend observed in IE: the majority of publications in this area emerged since 2018.

5. Syntax and Grammar

5.1 Track Description

Syntactic processing encompasses various subtasks in Natural Language Processing (NLP) focused on phrase and sentence structure, as well as the relation of words and constituents to each other within a phrase or sentence (Woolf 2010). It involves recognition of sentence constituents, identification of their syntactic roles, and potentially establishment of the underlying semantic structure. It provides valuable features for Natural Language Understanding (NLU) (Cambria et al. 2017), which is discussed in Appendix 15, and it serves as a pre-processing step for more complex NLP tasks, including sentiment analysis and error correction, among others (Zhang, Mao, and Cambria 2023). **Grammatical Error Correction (GEC)** is a user-oriented task that aims for automatically correcting diverse types of errors present in a given text, encompassing violations of rules pertaining to morphology, lexicon, syntax, and semantics (Wang et al. 2021). GEC can be used to enhance fluency, render sentences in a more natural manner, and align with the speech patterns of native speakers (Wang et al. 2021).

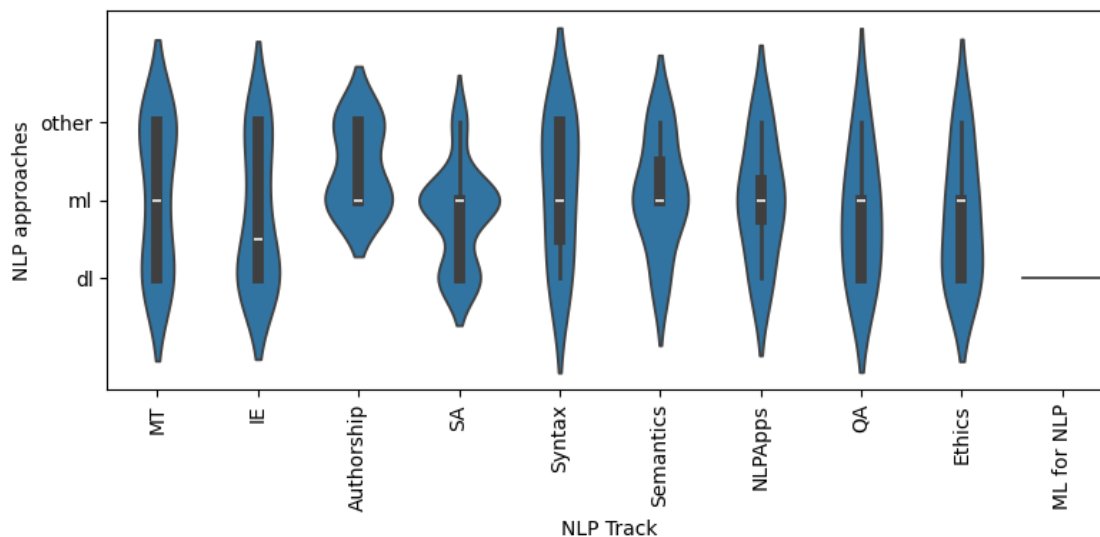


Figure 3
Distribution of NLP approaches per track.

5.2 Syntax and Grammar in Greek: Language Models and Methods

Syntactic Processing in Greek. This task is related to sentence splitting, tokenization, and morphosyntactic processing, such as Part of Speech (POS) tagging, lemmatization, and dependency parsing. Prokopidis and Piperidis (2020) addressed several syntax tasks, using the pre-trained Punkt model (Kiss and Strunk 2006) for sentence splitting and a BiLSTM tagger using the StanfordNLP library (Qi et al. 2019) for POS tagging. Lemmatization involved a lexicon-based approach with a BiLSTM lemmatization model as a fallback for out-of-lexicon words. For dependency parsing, the authors trained a neural attention-based parser (Dozat and Manning 2016) on the Greek Universal Dependencies (UD) treebank (Prokopidis and Papageorgiou 2017). The Greek UD treebank is part of the UD project (Nivre et al. 2016), which offers standardized treebanks that provide consistent and unified annotation practices across languages. Partalidou et al. (2019) conducted POS tagging and Named Entity Recognition (NER) tasks, with the details of their NER system summarized in §7. For POS tagging they used spaCy (Honnibal and Montani 2017), adhering to the UD annotation schema. Additionally, they assessed the model’s tolerance towards Out-of-Vocabulary (OOV) words, finding that the model lacked flexibility in handling such instances. Other NLP pipelines widely used by the papers we retrieved are: an ILSP suite of NLP tools (Prokopidis, Georgantopoulos, and Papageorgiou 2011), the Natural Language Toolkit (NLTK) (Bird 2006), polyglot,²⁰ spaCy for Greek,^{21,22} Stanza (Qi et al. 2020), and UDPipe (Straka and Straková 2017). Additional research in the field of Syntax includes the development of a multilingual sentence boundary detection method based on an incremental decision tree learning algorithm (Wong, Chao, and Zeng 2014). Furthermore,

²⁰ <https://github.com/aboSamoor/polyglot>

²¹ <https://spacy.io/models/el>

²² Google Summer of Code Project: <https://github.com/eellak/gsoc2018-spacy>

Samaridi and Markantonatou (2014) focused on parsing Multi-word expressions (MWEs) with Lexical-Functional Grammar / Xerox Linguistic Environments (LFG/XLEs), extending their analysis beyond traditional syntactic boundaries by incorporating lexical knowledge from lexicons.

GEC in Greek. Korre, Chatzipanagiotou, and Pavlopoulos (2021) focused on the correction of grammatical errors that vary from grammatical mistakes to punctuation, spelling, and morphology of word. The authors listed 18 main categories of grammatical errors that systems can correct, also developing a rule-based automatic annotation tool for Greek. The tool takes an original erroneous sentence along with its correction as input. Then, it automatically produces an annotation that mainly consists of the error location and type, as well as its correction. Gakis et al. (2016) created a rule-based grammar checker tool,²³ which analyzes and corrects syntactic, grammatical, and stylistic (i.e., the formal, informal, or oral style of language used) errors in sentences, providing users with error notifications and correction hints. Kavros and Tzitzikas (2022) focused on spelling errors, addressing the issue of misspelled and mispronounced words in Greek. They employed phonetic algorithms to assign the same code to different word variations based on phonetic rules. For example, they successfully grouped μήνυμα (correct spelling) with μόνημα (both sounding as /mínima/). They reported better results compared to stemming and edit-distance approaches.²⁴

5.3 Syntax and Grammar in Greek: Language Resources

Table 6 displays the pertinent monolingual Language Resources (LRs) for this track, where we see that all three resources regarding GEC are publicly available while the one about Syntax is not. Regarding the former, Kavros and Tzitzikas (2022) created word lists, containing words and their misspellings. These misspellings were generated through the addition, deletion, or substitution of a letter, as well as by incorporating words with similar sounds. Korre, Chatzipanagiotou, and Pavlopoulos (2021) developed two datasets, namely the Greek Native Corpus (GNC) and the Greek Wiki Edits (GWE). GNC is comprised of essays written by students who are native speakers of Greek, totalling 227 sentences. Each sentence within this dataset may contain zero, one, or multiple grammatical errors, all annotated with the corresponding grammatical error types as defined in the provided annotation schema. On the other hand, GWE consists of sentences extracted from WikiConv (Hua et al. 2018). Each sentence in this dataset includes the original sentence, the edited sentence, the original string that underwent editing, and the specific grammatical error type. The dataset on Syntax is from Gakis et al. (2015), who collected a corpus consisting of 2.05M tokens derived from student essays, literary works, and newspaper articles. They extracted morphosyntactic information automatically for this corpus with the help of a lexicon (Gakis et al. 2012).

5.4 Summary of Syntax and Grammar in Greek

Conventionally, syntactic processing was widely used in pre-processing steps for solving higher-level NLP tasks (§4). However, in the era of Deep Learning (DL)-based NLP, syntactic processing is often neglected. Instead, Neural Networks (NNs) are leveraged to implicitly capture syntactic information, surpassing the performance of symbolic methods that rely on manually hand-crafted features. This is also reflected by the number of ACL submissions related to Syntax (i.e., Tagging, Chunking and Parsing),

²³ It exists online at http://www.neurolingo.gr/en/online_tools/ggc and as a standalone application.

²⁴ The source code is available at <https://github.com/YannisTzitzikas/SoundexGR>

Table 6

LRs related to GEC and Syntax, with information on availability (Yes: publicly available, No: no information provided; tags are linkable except for No; see Table 3 for details), annotation type (see Table 4 for details), size, size unit, and text type of input.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	TYPE
Kavros and Tzitzikas (2022)	Yes	AUTOMATIC	1,086	WORD	WORD LIST
Korre, Chatzipanagiotou, and Pavlopoulos (2021)	Yes	MANUAL	227	SENTENCE	STUDENT ESSAY
	Yes	USER-GENERATED	100	SENTENCE	WIKIPEDIA TALK PAGE
Gakis et al. (2015)	No	AUTOMATIC	2,05M	TOKEN	ESSAY, LITERATURE, NEWS

which is significantly shrinking ([Rohatgi et al. 2023](#)). In our study, this is reflected in the complete absence of publicly available LR for syntactic processing. LRs for GEC in Greek, on the other hand, are also scarce but not absent.

6. Semantics

6.1 Track Description

The meaning in language is the focus of Semantics. In the context of Natural Language Processing (NLP), semantic analysis aims to extract, represent, and interpret meaning from textual data, bridging the gap between natural language and machine understanding ([Goddard 2011](#)). Semantic analysis can operate at three distinct levels, each focusing on different units of examination: Lexical Semantics, Sentence-Level Semantics, and Discourse Analysis. **Lexical Semantics** pertains to the understanding of word meanings, including the understanding of the various senses of words, their relationships with other words, and their roles in different linguistic contexts ([Cruse 1986](#)). **Sentence-level Semantics** considers the meaning of individual sentences or phrases in terms of their internal structure and relationships. **Discourse analysis**, on the other hand, deals with understanding the meaning in a broader textual context, beyond individual sentences ([Prasad et al. 2008](#)). It involves analyzing how sentences connect and influence each other within the context of a text or a conversation.

At the core of Lexical Semantics lies the task of Distributional Semantics, which is the leading approach to lexical meaning representation in NLP ([Lenci et al. 2022](#)). Founded upon the distributional hypothesis ([Harris 1954](#); [Sahlgren 2008](#)), which suggests that words sharing similar linguistic contexts also share similar meanings, Distributional Semantics employ real-valued vectors, commonly known as embeddings, to encode the linguistic distribution of lexical items within textual corpora. As [Lenci et al. \(2022\)](#) explain, this field has progressed through three key generations of models: (i) count-based Distributional Semantic Models (DSMs), which form distributional vectors based on co-occurrence frequencies that follow the Bag of Words (BoWs) assumption; (ii) prediction-based DSMs, employing shallow neural networks to learn vectors by predicting adjacent words, yielding dense, static word embeddings (or simply word embeddings); and (iii) contextual DSMs, harnessing deep neural language models to generate inherently contextualized vectors for each word token (e.g., word embeddings extracted from BERT-based models). The evolution from earlier static DSMs, which learn a single vector per word type, to contextual DSMs is further examined in §2.2.

6.2 Semantics in Greek: Language Models and Methods

Lexical Semantics. Studies focusing on Lexical Semantics in Greek address the following tasks: building DSMs, DSMs evaluation, diachronic semantic shifts of words, word sense induction, lexical ambiguity, metaphor detection, and semantic annotation.

Zervanou, Iosif, and Potamianos (2014) used BoW representations to study the impact of morphology on unstructured count-based DSMs. They proposed a selective stemming process, by using a metric to decide which words to stem, demonstrating improved performance in morphologically rich languages. Palogiannidi et al. (2015, 2016) used semantic similarity and BoW representations of seed words to estimate the ratings of unknown words, applying their method on affective lexica of five different languages, including Greek. Iosif, Georgiladakis, and Potamianos (2016) proposed word embeddings inspired by cognitive processes in human memory (Kahneman 2013), showing that they outperform BoW representations. Lioudakis, Outsios, and Vazirgiannis (2019) introduced the Continuous Bag of Skip-Gram (CBOS) method for generating word representations, combining Continuous Skip-gram with Continuous Bag of Words (CBOW), and assessing its performance across various tasks (word analogies, word similarity, etc.).²⁵

Outsios et al. (2020) performed *evaluation* using various word embeddings trained on diverse data sources. The evaluation framework considered tasks involving word analogies and similarity. Dritsa et al. (2022) and Barzokas, Papagiannopoulou, and Tsoumakas (2020) investigated the *diachronic semantic shifts of words* with the use of Distributional Semantics. Dritsa et al. (2022) constructed a dataset from Greek Parliament proceedings (further discussed in §14.4). They also applied four state-of-the-art semantic shift detection algorithms, namely Orthogonal Procrustes (Hamilton, Leskovec, and Jurafsky 2016b), Compass (Di Carlo, Bianchi, and Palmonari 2019), NN (Gonen et al. 2020a), and Second-Order Similarity (Hamilton, Leskovec, and Jurafsky 2016a), to identify word usage change across time and among political parties. Barzokas, Papagiannopoulou, and Tsoumakas (2020) compiled a corpus of e-books, trained word embeddings, and used k Nearest Neighbours along with cosine distances to trace semantic shifts aiming to capture both linguistic and cultural evolution.

Garí Soler and Apidianaki (2021) introduced an approach to analyze lexical polysemy knowledge in Pre-trained Language Models (PLMs) across various languages, including Greek. They found that contextual Language Model (LM) representations, like BERT, encode information about lexical polysemy, and they performed *word sense induction* by enabling interpretable clustering of polysemous words based on their senses. On the other hand, Gakis et al. (2015) analyzed *lexical ambiguity* using morphosyntactic features from the Neurolingo Morphological Lexicon (Gakis et al. 2012). They categorized ambiguous words based on spelling and etymology. Florou, Perifanos, and Goutsos (2018) focused on *metaphor detection* using the discriminative model of Steen (2007), identifying the literal and metaphorical functions of phrases through the optimal separation of hyperplanes in vector representations of word combinations.

Chowdhury et al. (2014) addressed the challenge of transferring *semantic annotations* from a source language corpus (Italian) to a low-resource target language (Greek) using crowd-sourcing. They introduced a methodology to evaluate the quality of crowd-annotated corpora by considering inter-annotator agreement for evaluation of annotations within the target language, whereas cross-language transfer quality is evaluated by comparison against source language annotations.

Sentence-Level Semantics. The only paper we retrieved in the context of Sentence-level Semantics deals with semantic parsing. Semantic parsing is a process that entails transforming natural language ut-

²⁵ The source code is available at https://github.com/mikeliou/greek_word_embeddings

terances into logical forms suitable for execution on a knowledge base (Kamath and Das 2018). To address this task, Li et al. (2015) employed Synchronous Context-free Grammars (SCFGs) as the grammar framework to derive coherent logical forms. SCFGs model the relationship between two languages, and the authors enriched them by extending the translation rules with informative symbols and increasing the overall coverage. By evaluating their approach on a benchmark dataset, they showed that it achieved state-of-the-art performance in English, Greek, and German.

6.3 Semantics in Greek: Language Resources

Table 7 presents the Language Resources (LRs) for semantics-related tasks, along with their availability (classified according to Table 3), annotation type (classified as per Table 4), linguality type, size, and size unit. By contrast to Syntax (§5), only one LR regarding Semantics is publicly available. The rest six are either of limited availability (Lmt), could not be accessed (Err), or were not publicly available (No).

Table 7

LRs related to Semantics, with information on availability (Yes: publicly available, Lmt: limited availability, Err: unavailable, No: no information provided; tags are linkable except for No; see Table 3 for details), annotation type (see Table 4 for details), linguality type, size, and size unit (with size denoting the portion in Greek for multilingual datasets).

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	LINGUALITY
Ganitkevitch and Callison-Burch (2014)	Yes	HYBRID	22.3M	PARAPHRASE	MULTILINGUAL
Garí Soler and Apidianaki (2021)	Lmt	AUTOMATIC	418	WORD	MULTILINGUAL
Outsios et al. (2020)	Err	MANUAL	353	WORD-PAIR	MONOLINGUAL
	Err	AUTOMATIC	39,174	WORD ANALOGY QUESTION	MONOLINGUAL
Pilitsidou and Giouli (2021)	No	MANUAL	73,069	TOKEN	BILINGUAL
Giouli, Pilitsidou, and Christopoulos (2020)	No	MANUAL	3,012	TOKEN	MONOLINGUAL
Florou, Perifanos, and Goutsos (2018)	No	MANUAL	914	SENTENCE	MONOLINGUAL

Ganitkevitch and Callison-Burch (2014) expanded the Paraphrase Database (PPDB) (Ganitkevitch, Van Durme, and Callison-Burch 2013)²⁶ with paraphrases in 23 languages, including Greek. The original database contains human-annotated paraphrases in English. For the additional languages, Ganitkevitch and Callison-Burch (2014) extracted paraphrases using parallel corpora.²⁷ Garí Soler and Apidianaki (2021) offered a multilingual dataset comprising words, their corresponding senses, and sentences featuring the word in its specific sense. In the case of the Greek part of the corpus, sentences were extracted from the Eurosense corpus (Bovi et al. 2017), which contains texts from Europarl, automatically annotated with BabelNet word senses (Navigli and Ponzetto 2012). Outsios et al. (2020) translated to Greek the benchmark dataset WordSim353 (Finkelstein et al. 2001), which contains word pairs along with human-assigned similarity judgements. Additionally, they assembled 39,174 analogy questions to conduct word analogy tests, measuring word similarity in a low-dimensional embedding space (Mikolov et al. 2013a). LRs of the three studies that were not publicly available were about the Greek counterpart of the Global FrameNet project Giouli, Pilitsidou, and Christopoulos (2020), a bilingual frame-semantic lexicon for the financial domain Pilitsidou and Giouli (2021), and a corpus that consists of sentences using the same transitive verbs in both metaphorical and literal contexts (Florou, Perifanos, and Goutsos 2018).

²⁶ <http://paraphrase.org/>

²⁷ Not discussed earlier in this Section, because there was no other contribution besides the introduction of this LR.

6.4 Summary of Semantics in Greek

Studies pertaining to Semantics can be found throughout the decade under investigation (2012-2022), but most were published in early years (2013-2016; see Figure 4). Most of the studies focus on Lexical Semantics. While various semantics-related tasks are addressed, typically only one study per task is observed. An exception regards DSM, where significant attention has been directed towards prediction-based methods, with notable studies being those of Iosif, Georgiladakis, and Potamianos (2016) and Lioudakis, Outsios, and Vazirgiannis (2019), who proposed new approaches to generate word embeddings, and of Outsios et al. (2020) who undertook a word embedding benchmark. We also acknowledge that contextual embeddings, which comprise rich information (Nikolaev and Padó 2023; Padó 2023), are heavily understudied in Greek. That is despite the existence of publicly available models (Koutsikakis et al. 2020; Evdaimon et al. 2023). An exception is the work of Garí Soler and Apidianaki (2021), who investigated the potential of contextual embeddings to capture lexical polysemy.

7. Information Extraction

7.1 Track Description

Information Extraction (IE) concerns the automated identification and extraction of structured data, including entities, relationships, events, or other factual information from unstructured text. The primary objective of IE is to make the information machine-readable, facilitating analysis, search, and practical use of textual information (Yang et al. 2022).

7.2 Information Extraction in Greek: Language Models and Methods

Following, we present studies addressing IE (in descending order of recency) and Named Entity Recognition (NER), for which we retrieved a sufficient body of research to study separately from IE.

IE. Mouratidis et al. (2022) developed a **term extraction** system from maritime legal texts to aid in maritime heritage preservation, employing a feed-forward Deep Neural Network (DNN) model. In a separate study, Papadopoulos, Papadakis, and Matsatsinis (2021) tackled **Open Information Extraction (Open IE)**, a process involving the conversion of unstructured text into <SUBJECT; RELATION; OBJECT> tuples. Addressing the challenge of Open IE in resource-lean languages like Greek, Papadopoulos, Papadakis, and Matsatsinis (2021), used Neural Machine Translation (NMT) between English and Greek to generate English translations of Greek text (§12), which are then processed through an Natural Language Processing (NLP) pipeline, enabling coreference resolution, summarization, and triple extraction using existing English Language Models (LMs) and tools, and then back-translated the extracted triplets to Greek.²⁸ Barbaresi and Lejeune (2020) evaluated **web content extraction** tools on HTML 4 standard pages in five different languages (Greek, Chinese, English, Polish, Russian) concluding that the three best tools for Greek perform comparably to the three top tools for English; for the rest of the languages the results are much lower than in English and Greek, both in terms of precision and recall. Finally, Lejeune et al. (2015) developed a multilingual (Chinese, English, Greek, Polish, and Russian) rule- and character-

²⁸ The source code is available at <https://github.com/lighteternal/PENELOPIE>.

based **event extraction** system,²⁹ in which an event is defined minimally as a pair consisting of a disease and its corresponding location.

NER. This task involves the identification and categorization of specific entities, such as names of people, organizations, locations, dates, and more, within unstructured text. We have identified the following studies that conducted research in this area. [Rizou et al. \(2022\)](#) carried out NER and **intent classification** tasks for both Greek and English using the widely used benchmark dataset, the Airline Travel Information System (ATIS) ([Hemphill, Godfrey, and Doddington 1990](#)), which they translated into Greek. Given that the sentence intent heavily relies on the named entities that comprise the sentence within the ATIS dataset, they employed a joint model using Transformed-based models. [Bartziokas, Mavropoulos, and Kotropoulos \(2020\)](#) curated NER datasets and evaluated them with five DNN models chosen for their high performance on the English CoNLL-2003 ([Sang and De Meulder 2003](#)) and OntoNotes 5 ([Pradhan et al. 2007](#)) datasets, showing comparable performance to English. [Partalidou et al. \(2019\)](#) employed spaCy ([Honnibal and Montani 2017](#)) for **Part of Speech (POS) tagging** and NER, discovering limited impact of POS tags on NER. [Angelidis, Chalkidis, and Koubarakis \(2018\)](#) performed NER and **entity linking** in legal texts. For NER they used Long Short-Term Memory (LSTM) models; for entity linking, Levenshtein and substring distance were evaluated; for entity representation and linking, a Resource Description Framework (RDF) specification was chosen. In entity linking, [Papantoniou, Efthymiou, and Flouris \(2021\)](#) performed NER on the text, generating candidates for the extracted entities from several wiki-based knowledge bases, then conducting disambiguation.

7.3 Information Extraction in Greek: Language Resources

Table 8 presents the Language Resources (LRs) developed for IE (incl. NER) tasks in Greek.

Table 8

Datasets related to IE with information on availability (Yes: publicly available, Err: unavailable, No: no information provided; tags are linkable except for No; see Table 3 for details), annotation type (see Table 4 for details), size, size unit, and domain.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	DOMAIN
Bartziokas, Mavropoulos, and Kotropoulos (2020)	Yes	HYBRID	623,700	TOKEN	NEWS
	Yes	HYBRID	623,700	TOKEN	NEWS
Rizou et al. (2022)	Err	MANUAL	5,473	SENTENCE	AIRLINE TRAVEL
Lioudakis, Outsios, and Vazirgiannis (2019)	Err	HYBRID	N/A	N/A	N/A
Angelidis, Chalkidis, and Koubarakis (2018)	Err	MANUAL	254	PIECE	LEGAL
Lejeune et al. (2012)	Err	MANUAL	390	DOCUMENT	EPIDEMICS
Mouratidis et al. (2022)	No	MANUAL	80,000	WORD	MARITIME LAW

By focusing on LRs about named entities, [Bartziokas, Mavropoulos, and Kotropoulos \(2020\)](#) provided two annotated datasets, one with 4 label tags akin to the CONLL-2003 dataset ([Sang and De Meulder 2003](#)), and the other incorporating 18 tags for entities, as in the OntoNotes 5 English dataset ([Pradhan et al. 2007](#)). These datasets were developed during the GSOC2018 project (discussed in §5), where initial automatic annotation was followed by manual curation. [Lioudakis, Outsios, and Vazirgiannis \(2019\)](#) converted the GSOC2018 named entity annotated dataset to the CONLL-2003 format. The source dataset

²⁹ The system was referred also in prior studies of the authors ([Brixtel et al. 2013](#); [Lejeune et al. 2012](#)).

was annotated using Prodigy,³⁰ where the initial annotations were done manually, and subsequently, model predictions were used to accelerate the annotation process. Rizou et al. (2022) undertook the task of translating to Greek the Airline Travel Information System corpus (ATIS) dataset (Hemphill, Godfrey, and Doddington 1990),³¹ and eliminating duplicate entries. Angelidis, Chalkidis, and Koubarakis (2018) curated a dataset containing 254 daily issues of the Greek Government Gazette spanning the period 2000-2017, manually annotated for six entity types. Lejeune et al. (2012) offered 1,681 documents in five languages annotating them regarding diseases and locations-where applicable. Mouratidis et al. (2022) conducted stemming on legal texts related to maritime topics from the Official Government Gazette of the Hellenic Republic, annotating tokens as either maritime terms or not.

7.4 Summary of Information Extraction in Greek

IE studies in Greek primarily revolve around the NER task, often providing datasets alongside. Out of the seven reported LRs, only two are publicly available, but four may also become available in the future. Figure 4 shows that there was relative interest in IE early on (2012-2014), which was discontinued (up to 2017), and then kept an upward trend. This can explain the wide box plot for this task in Figure 3, with the median favouring Deep Learning (DL) approaches, which is probably related to efforts to create benchmark datasets (Bartziokas, Mavropoulos, and Kotropoulos 2020; Rizou et al. 2022; Angelidis, Chalkidis, and Koubarakis 2018). Such benchmark datasets create the resources needed to train and assess DL models. Another notable study in light of the data scarcity in certain IE tasks is the work of Papadopoulos, Papadakis, and Matsatsinis (2021) who leveraged cross-lingual transfer learning.

8. Sentiment Analysis and Argument Mining

The Sentiment Analysis (SA) task concerns the detection of opinions expressed in opinionated texts while argument mining concerns the detection of the reasons why people hold their opinions (Lawrence and Reed 2020).

8.1 Track Description

As its name suggests, SA concerns the analysis of human sentiments toward specific entities. Besides the analysis of sentiment, the task also concerns opinions, appraisals, attitudes or emotions (Liu 2020), while the entities discussed can be products, services, organisations, individuals, events, issues, topics, etc. Particularly active in domains such as finance, tourism, health, and social media, it involves applications in recommendation-based systems (Al-Ghuribi and Noah 2021), business intelligence (Rokade and Aruna 2019), and predictive or trend analyses (Mudinas, Zhang, and Levene 2019; Chauhan, Sharma, and Sikka 2021). The field of SA has evolved significantly since it was popularized by the pioneering work of Turney (2002) and Pang, Lee, and Vaithyanathan (2002) who classified a text as positive or negative. Subsequent studies have expanded and enriched the field, moving beyond binary classification and introducing slightly different tasks and alternative terms, such as opinion mining, opinion analysis, opinion extraction, sentiment mining, subjectivity analysis, affect analysis, emotion analysis, and review

³⁰ <https://prodi.gy/>

³¹ This dataset consists of audio recordings and manual transcripts of inquiries related to flight information in automated airline travel systems. It is complemented with annotations for named entities within the airline travel domain and intent categories.

mining, all of which now fall under the umbrella of SA (Liu 2020). Further information on this track and background knowledge is included in Appendix 15.

8.2 Sentiment Analysis and Argument Mining in Greek: Language models and Methods

Document-Level SA. GreekBERT (Koutsikakis et al. 2020) was used by Bilianos (2022) to classify the polarity of product reviews as positive or negative. Braoudaki et al. (2020) also performed binary polarity classification of reviews, by experimenting with Long Short-Term Memory (LSTM) architectures and lexicon-based input features. Medrouk and Pappa (2018, 2017) applied binary polarity classification as well, but experimented with monolingual and multilingual input. Multilingual SA was addressed also by Manias et al. (2020), who investigated the impact of Neural Machine Translation (NMT) on SA. The authors translated a part of the English IMDB reviews³² to Greek and German and trained the same Neural Network (NN) architecture on SA using either the source or the target language as input. Translation has also been used in Athanasiou and Maragoudakis (2017) for data augmentation purposes.

Early document-level SA approaches were mainly based on Machine Learning (ML) and feature engineering, employing information such as term frequency (Markopoulos et al. 2015), the part of speech (Spatiotis et al. 2020, 2019; Belevessis et al. 2019; Spatiotis et al. 2017, 2016), and sentiment lexicons (see Table 10). Features crafted from sentiment lexicons have been found beneficial compared to word dense embeddings because the latter do not carry sentiment information (Giatsoglou et al. 2017), while Markopoulos et al. (2015) denoted that the Term Frequency - Inverse Document Frequency (TF-IDF) representation outperformed lexicon-based features. Feature engineering-based SA is not optimal when compared to Deep Learning (DL) counterparts (Bilianos 2022; Kapoteli, Koukaras, and Tjortjis 2022; Alexandridis et al. 2021; Spatiotis et al. 2020, 2019). However feature engineering-based SA is associated with applications aimed at benefiting society in the context of Greek language processing.. An example is hybrid educational systems (Spatiotis et al. 2020, 2019), where features such as the school level, region, gender were also exploited.

Sentence-Level SA. Kapoteli, Koukaras, and Tjortjis (2022) fine-tuned GreekBERT for the binary classification of tweets related to COVID-19 vaccination as negative or not (i.e., positive and neutral tweets were merged into a non-negative class to achieve balanced class distribution). Alexandridis et al. (2021) performed a benchmark of SA methods either by including the neutral class or not. In the binary setting, the gpt2-greek³³ Language Model (LM) outperformed ML methods using GreekBERT and fastText word embeddings. In the 3-class setting, only DL methods were used. The authors created and shared two Large Language Models (LLMs), PaloBERT³⁴ and GreekSocialBERT³⁵, with the latter outperforming the former, which in turn outperformed GreekBERT. In a subsequent study, Alexandridis et al. (2022) compared their LMs in emotion detection and concluded that GreekBERT consistently exhibited better performance compared to PaloBERT. Drakopoulos et al. (2020) used Graph Neural Networks (GNNs) on tweets, which were found to provide more accurate estimations of the intentions by aggregating information about the account.

In earlier work in sentence-level SA, Tsakalidis et al. (2018b) highlighted the importance of considering the domain in SA, noting that n-gram representations are more effective for intra-domain SA, while

³² <https://www.kaggle.com/utathya/imdb-review-dataset>

³³ <https://huggingface.co/nikokons/gpt2-greek>

³⁴ <https://huggingface.co/gealexandri/palobert-base-greek-uncased-v1>

³⁵ <https://huggingface.co/gealexandri/greeksocialbert-base-greek-uncased-v1>

word embeddings and lexicon-based methods are more suitable for cross-domain SA. Charalampakis et al. (2016, 2015) ranked the features they used in descending order of significance, based on information gain. Solakidis, Vavliakis, and Mitkas (2014) conducted semi-supervised SA and emotion detection using lexicon-based n-gram features of emoticons and keywords, and found that emoticons can intensify and indicate the presence and polarity of specific sentiments within a document. Chatzakou, Vakali, and Kafetsios (2017) categorized social media input into 12 emotions using lexicon-based features of sentiment words and emoticons, where they translated from Greek the words of the input texts to English for the usage of English sentiment lexicons. Besides ML-based SA, there are also studies regarding the exploration of sentiment for real world situations, such as COVID-19 (Kydros, Argyropoulou, and Vrana 2021) and pre-election events (Beleveslis et al. 2019).

Aspect-Based SA. Antonakaki et al. (2017, 2016) performed entity-based SA and sarcasm detection for political tweets. They performed entity identification manually, lexicon-based SA for each tweet, and sarcasm detection with Support Vector Machine (SVM) using a lexicon and performing topic modelling, as they hypothesised that some topics are more associated with sarcasm.³⁶ Petasis et al. (2014) performed entity-based SA to support a real-world reputation management application, monitoring whether entities are perceived positively or negatively on the Web.

Stance Detection. Tsakalidis et al. (2018a) aimed to nowcast on a daily basis the voting stance of Twitter users during the pre-electoral period of the 2015 Greek bailout referendum. They performed semi-supervised time-sensitive classification of tweets, leveraging text and network information.

Argument Mining. Sliwa et al. (2018) tackled non-English languages argument mining using parallel data. They used parallel data pairs with English as the source language and either Arabic or a Balkan language, including Greek, as the target language. They automatically annotated English sentences for argumentation and extended the labels to target languages using majority voting with eight argument mining classifiers. Sardonios et al. (2015) identified segments representing argument elements (i.e., claims and premises) in online (e.g. news) texts, using Conditional Random Fields (CRFs) (Lafferty, McCallum, and Pereira 2001) and features based on Part of Speech (POS) tags, cue word lists, and word embeddings.

8.3 Sentiment Analysis and Argument Mining in Greek: Language Resources

Table 9 presents the datasets related to SA and Argument Mining, along with information on their availability (see Table 3), annotation type (see Table 4), size, size unit and classes of annotation. The number of instances, based on input type and granularity, is also reported per dataset (size). Besides datasets, Language Resources (LRs) in Greek comprise also sentiment lexicons, which are summarised in Table 10 and have been used to extract features for ML algorithms, or could have been used (Chen and Skiena 2014).

Document-Level SA. Document-Level datasets in Greek regards mainly product reviews. Bilianos (2022) presented 240 negative and 240 positive electronic product reviews. These reviews consist of user-generated content, where the ratings were adjusted by the researchers to generate binary polarity. The remaining studies focusing on document-level SA created datasets annotated either for emotion (Kapoteli, Koukaras, and Tjortjis 2022) or sentiment (Braoudaki et al. 2020; Spatiotis et al. 2020, 2019, 2016; Manias

³⁶ The source code of Antonakaki et al. (2017) is available at <https://doi.org/10.5281/zenodo.820555>.

Table 9

Datasets for SA and argument mining, indicating their availability status (Lmt: limited availability, Err: unavailable, No: no information provided; tags are linkable except for “No” tag and datasets available upon request; see Table 3 for details), annotation type (see Table 4 for details), size, size unit, and the sentiment annotation classes.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	CLASS #
Antonakaki et al. (2017)	Yes	AUTOMATIC	301,000	TWEET	-5 TO -1 (NEGATIVE), 1 TO 5 (POSITIVE)
	Yes	AUTOMATIC	182,000	tweet	-5 TO -1 (NEGATIVE), 1 TO 5 (POSITIVE)
	Yes	MANUAL	4,644	TWEET	SARCASTIC, NON-SARCASTIC
Chatzakou, Vakali, and Kafetsios (2017)	Lmt	MANUAL	2,246	TWEET	EKMAN’S SIX BASIC EMOTIONS & ENTHUSIASM, REJECTION, SHAME, ANXIETY, CALM, INTEREST
Bilianos (2022)	Lmt	USER-GENERATED	480	REVIEW	POSITIVE, NEGATIVE
Kydros, Argyropoulou, and Vrana (2021)	Lmt	AUTOMATIC	44,639	TWEET	POSITIVE, NEGATIVE, ANXIETY
Sliva et al. (2018)	Lmt	AUTOMATIC	166,430	SENTENCE	ARGUMENTATIVE, NON-ARGUMENTATIVE
Tsakalidis et al. (2018b)	Lmt	MANUAL	1,640	TWEET	POSITIVE, NEGATIVE, NEUTRAL
	Lmt	MANUAL	2,506	TWEET	SARCASTIC, NON-SARCASTIC
Makrynioti and Vassalos (2015)	Lmt	MANUAL	8,888	TWEET	POSITIVE, NEGATIVE
Sardianos et al. (2015)	Lmt	MANUAL	300	DOCUMENT	ARGUMENT
Charalampakis et al. (2016)	Err	HYBRID	44,438	TWEET	IRONIC, NON-IRONIC
Charalampakis et al. (2015)	Err	HYBRID	61,427	TWEET	IRONIC, NON-IRONIC
Alexandridis et al. (2022)	No	MANUAL	3,875	TWEET	POSITIVE, NEGATIVE, NEUTRAL
	No	MANUAL	54,916	DOCUMENT	EKMAN’S SIX BASIC EMOTIONS, ANTICIPATION, TRUST & NONE
Alexandridis et al. (2021)	No	MANUAL	59,810	SOCIAL MEDIA TEXT	POSITIVE, NEGATIVE, NEUTRAL
Kapotei, Koukaras, and Tjortjis (2022)	No	MANUAL	1,424	TWEET	POSITIVE, NEGATIVE, NEUTRAL
Braoudaki et al. (2020)	No	USER-GENERATED	156,700	REVIEW	POSITIVE, NEGATIVE
Drakopoulos et al. (2020)	No	AUTOMATIC	17.465M	TWEET	POSITIVE, NEGATIVE
Spatiotis et al. (2020, 2019, 2016)	No	MANUAL	11,156	REVIEW	VERY POSITIVE, POSITIVE, NEUTRAL, NEGATIVE, VERY NEGATIVE
Manias et al. (2020)	No	MANUAL	4,251	REVIEW	POSITIVE, NEGATIVE, UNSUPPORTED
Belevselis et al. (2019)	No	AUTOMATIC	46,705	TWEET	POSITIVE, NEGATIVE, NEUTRAL
Medrouk and Pappa (2018)	No	USER-GENERATED	91,816 (EL, EN, FR)	REVIEW	POSITIVE, NEGATIVE
Tsakalidis et al. (2018a)	No	HYBRID	1.64M	TWEET	FAVOR, AGAINST
Medrouk and Pappa (2017)	No	USER-GENERATED	2,600	REVIEW	POSITIVE, NEGATIVE
	No	USER-GENERATED	7,200 (EL, EN, FR)	REVIEW	POSITIVE, NEGATIVE
Athanasiou and Maragoudakis (2017)	No	MANUAL	740	COMMENT	POSITIVE, NEGATIVE
Giatsoglou et al. (2017)	No	MANUAL	2,800	SENTENCE	POSITIVE, NEGATIVE
Spatiotis et al. (2017)	No	MANUAL	11,156	REVIEW	VERY POSITIVE, POSITIVE, NEUTRAL, NEGATIVE, VERY NEGATIVE
	No	MANUAL	1,800	REVIEW	POSITIVE, NEGATIVE
Markopoulos et al. (2015)	No	MANUAL	2,300	TEXT	POSITIVE, NEGATIVE
Petasis et al. (2014)	No	MANUAL	2,300	TEXT	POSITIVE, NEGATIVE
Solakidis, Vavliakis, and Mitkas (2014)	No	AUTOMATIC	25,700	TWEET	POSITIVE, NEGATIVE, NEUTRAL, JOY, LOVE, ANGER, SADNESS

et al. 2020; Medrouk and Pappa 2018, 2017; Athanasiou and Maragoudakis 2017; Spatiotis et al. 2017; Markopoulos et al. 2015; Petasis et al. 2014), but did not make them publicly available.

Sentence-Level SA. Datasets annotated for sentiment at the sentence-level in Greek primarily consist of tweets. Antonakaki et al. (2017) presented three datasets of tweets focused on politics. Two datasets feature automatic sentiment annotation on a scale from -5 to 5, while the third is manually annotated for sarcasm using crowdsourcing, employing a binary classification. All datasets include the full text of the tweets. Chatzakou, Vakali, and Kafetsios (2017) presented a dataset of randomly selected tweets annotated for 12 emotions, also through crowdsourcing and majority voting. Kydros, Argyropoulou, and Vrana (2021) provided, upon request, a dataset of tweets related to the Covid-19 pandemic. These tweets were automatically annotated using lexicons to determine their sentiment as either positive or negative, with an additional annotation for anxiety. Tsakalidis et al. (2018b) provided a tweet dataset related to the January 2015 General Elections in Greece annotated for positive or negative sentiment, as well as a second dataset election-related tweets annotated for sarcasm. Both datasets were filtered to include only instances where annotators agreed. Makrynioti and Vassalos (2015) randomly sampled 8,888 tweets

from August 2012 to January 2015 and annotated them as positive, negative or neutral. Charalampakis et al. (2016, 2015) provided two tweet datasets annotated for irony. Each dataset comprises 162 manually annotated tweets, with the remaining tweets annotated automatically. These tweets were collected in the weeks before and after the May 2012 parliamentary elections in Greece and are characterized by the political parties and their leaders. The remaining studies focusing on sentence-level SA are not publicly available and they primarily use tweets (Alexandridis et al. 2022; Kapoteli, Koukaras, and Tjortjis 2022; Drakopoulos et al. 2020; Beleveslis et al. 2019; Tsakalidis et al. 2018a; Solakidis, Vavliakis, and Mitkas 2014) or social media content from other sources (Alexandridis et al. 2021). An exception is Giatsoğlu et al. (2017), who segmented user reviews on mobiles into sentences for annotation. Additionally, all datasets are annotated for sentiment, except for Solakidis, Vavliakis, and Mitkas (2014), who annotated both sentiment and (four) emotions.

Argument Mining. Sliwa et al. (2018) provided a collection of bilingual datasets containing sentences labeled as argumentative or non-argumentative, available upon request. The sentences were automatically annotated by eight different argument mining models, and the final label was determined based on the majority vote of these models. These datasets derived from parallel corpora where the source language is English and target language is either a Balkan language or Arabic. Additionally, Sardianos et al. (2015) made a dataset available upon request. This dataset consisted of 300 news articles from the Greek newspaper Avgi,³⁷ annotated by two human annotators (150 articles each) for argument components, i.e. premises and claims.

Table 10

Sentiment lexica with information on availability (Lmt: limited availability, Err: unavailable, No: no information provided; tags are linkable except for No; see Table 3 for details), size, size unit, and annotation type.

AUTHORS	AVAILABILITY	SIZE	SIZE UNIT	ANNOTATION TYPE
Tsakalidis et al. (2018b)	Lmt	32,884	UNIQUE INFLECTED FORM	SUBJECTIVITY, SENTIMENT, EMOTION
	Lmt	190,667	NGRAM	SENTIMENT
	Lmt	32,980	NGRAM	EMOTION
Giatsoğlu et al. (2017)	Err	4,658	WORD	SUBJECTIVITY, SENTIMENT, EMOTION
Palogiannidi et al. (2016)	Err	407,000	WORD	VALENCE, AROUSAL, DOMINANCE
Antonakaki et al. (2017)	No	4,915	WORD	SENTIMENT
Markopoulos et al. (2015)	No	68,748	TYPE	SENTIMENT

SA Lexicons. Tsakalidis et al. (2018b) developed three lexicons with data collected between August 1st, 2015, and November 1st, 2015. The first lexicon was derived from the digital version of the Dictionary of Standard Modern Greek,³⁸ which was web-crawled to gather words used in an ironic, derogatory, abusive, mocking, or vulgar manner. This process yielded 2,324 words (later reduced to 2,260 after editing) along with their definitions. These words were manually annotated as objective, strongly subjective, or weakly subjective. Subjective words were further annotated as positive, negative, or both, and each annotation was rated on a scale from 1 (least) to 5 (most) based on Ekman’s six basic emotions. The annotations were then automatically extended to all inflected forms, resulting in 32,884 types. To capture informalities prevalent in Twitter content, the authors also developed two Twitter-specific lexicons collecting

³⁷ <https://www.avgi.gr/>

³⁸ https://www.greek-language.gr/greekLang/modern_greek/tools/lexica/triantafyllides/

tweets using seed words from the first lexicon. [Giatsoglou et al. \(2017\)](#) proposed an expansion of the lexicon of [Tsakalidis, Papadopoulos, and Kompatsiaris \(2014\)](#), which included 2,315 words annotated for subjectivity, polarity, and Ekman's six emotions. This expanded lexicon incorporated synonyms grouped around each term and assigned a vector containing the average emotion over all dimensions and terms, resulting in a total of 4,658 Greek terms. [Palogiannidi et al. \(2016\)](#) introduced an affective lexicon of 1,034 words with human ratings for valence, arousal, and dominance, originating from the [Bradley and Lang \(1999\)](#). The terms were translated, manually annotated by multiple annotators, and then automatically expanded using a semantic model to estimate the semantic similarity between two words, resulting in a final lexicon containing 407,000 words. The following lexicons are not publicly available. [Antonakaki et al. \(2017\)](#) presented a lexicon consisting of 4,915 words annotated for polarity. This lexicon is a compilation of three independent lexicons: two general purpose-lexicons and one from the political domain. [Markopoulos et al. \(2015\)](#) developed a sentiment lexicon comprising Greek words found in the corpus they also constructed, conveying positive or negative meanings. Their lexicon covers all inflected forms of the words found in the corpus, totaling 68,748 types.

8.4 Summary of Sentiment Analysis and Argument Mining in Greek

SA for Greek is applied to hotel and product reviews, political posts, educational questionnaires, COVID19-related posts, and trending topics discussed on Twitter, listed here in descending order of frequency. We have observed also studies that deal with a range of distinct emotions, or a specific emotion, e.g. anxiety or irony which is a sentiment that is extremely challenging to capture in Natural Language Processing (NLP) ([Wankhade, Rao, and Kulkarni 2022](#)). The SA task has attracted significant attention in the field of NLP for Greek (Fig.4), constituting approximately one-fourth of the studies (24.6%). This attention reached its peak in 2017 before experiencing a slight decrease. A similar trend is observed across ACL Anthology tracks only slightly earlier, i.e., between 2013 and 2016 ([Rohatgi et al. 2023](#)). Despite this abundance of studies, however, we observe that publicly available Greek datasets are scarce. Even among the published datasets, limitations exist. Moreover, studies exploring SA through lexicons have generated new lexicons, yet none of these are publicly accessible.

9. Authorship Analysis

9.1 Track Description

Authorship analysis attempts to infer information about the authorship of a piece of work ([El and Kassou 2014](#)). It encompasses three primary tasks: **author profiling**, detecting sociolinguistic attributes of the authors from their text; **authorship verification**, determining whether a text belongs to a specific author; and **authorship attribution**, pinpointing the right author of a particular text from a predefined set of potential authors ([El and Kassou 2014](#)). Both authorship verification and authorship attribution are variations of the broader **author identification** problem, which seeks to determine the author of a text ([Kestemont et al. 2018](#)). Another pertinent task within authorship analysis is **author clustering**, which entails grouping documents authored by the same individual into clusters, with each cluster representing a distinct author ([Rosso et al. 2016](#)). While other tasks may also relate to authorship analysis, our focus is on these four tasks, as research in the Greek language is predominantly limited to them.

9.2 Authorship Analysis: Language Models and Methods

In Greek, Authorship Analysis has been supported by a workshop series addressing various tasks within this field. Furthermore, additional studies concentrating on the fundamental tasks of authorship analysis have been identified.

PAN. A workshop series and a networking initiative, called PAN,³⁹ is dedicated to the fields of digital text forensics and stylometry since 2007. Its objective is to foster collaboration among researchers and practitioners, exploring text analysis in terms of authorship, originality, trustworthiness, and ethics among others. PAN has organized shared tasks focusing on computational challenges related to authorship analysis, computational ethics, and plagiarism detection, amassing a total of 64 shared tasks with 55 datasets provided by the organizing committees and an additional nine contributed by the community (Bevendorff et al. 2023). Among these tasks, four specifically addressed Greek, with three dealing with author identification (Juola and Stamatatos 2013; Stamatatos et al. 2014, 2015), and one with author clustering (Stamatatos et al. 2016).

Authorship Attribution. Juola, Mikros, and Vinsick (2019) benchmarked an attribution framework,⁴⁰ on a corpus of Greek texts that were authored by students who also translated their texts to English. Authorship attribution was substantially more accurate in English compared to Greek. They provided three possible reasons suitable for future investigation. First, the framework or the features tested excel in English-like languages (selection bias). Second, authorship pool bias may exist due to authors' non-native English proficiency, potentially affecting the error rate. Third, linguistically, Greek might possess inherent complexities hindering individual feature extraction.

Authorship Verification. This task has been addressed in Greek in a multilingual setting. Kocher and Savoy (2017) suggested an unsupervised baseline, by concatenating the candidate author's texts and comparing the 200 most frequent occurring terms (words and punctuation symbols) extracted from these texts with those extracted from the disputed text. Hürliemann et al. (2015) trained a binary linear classifier on top of engineered features (e.g., character n-grams, text similarity, visual text attributes),⁴¹ while Halvani, Winter, and Pflug (2016) approached the task with a single-class classification, demonstrating strong performance in the PAN-2020 competition (Halvani, Graner, and Regev 2020; Kestemont et al. 2020).

Author Profiling. Perifanos (2015) and Mikros (2013) performed gender identification in Greek tweets. They deployed Machine Learning (ML) algorithms using stylometric features in the character and word level, most frequent words in the text, as well as gender-related keywords lists, extracted from the texts. Mikros (2013) explored stylometric features, which contained both lexical and sub-lexical units, to explore their usage distribution over texts of male and female authors, concluding that men and women use differently most stylometric features. In a prior study, Mikros (2012) conducted author gender identification and authorship attribution using stylometric features, employing the Sequential Minimal Optimization (SMO) algorithm (Platt 1999). Their findings indicated that author gender is conveyed through distinctive syntactical and morphological patterns, whereas authorship is linked to the over- or under-representation of certain high-frequency words.

³⁹ <https://pan.webis.de/>

⁴⁰ <https://github.com/evllabs/JGAAP>

⁴¹ The source code is available at <https://github.com/pan-webis-de/huerlimann15>.

9.3 Authorship Analysis in Greek: Language Resources

Table 11 displays the corresponding Language Resources (LRs) available for Authorship Analysis in Greek. All the publicly available datasets regarding tasks in Authorship Analysis originate from the PAN workshop series. While our paper retrieval process returned only the task overview papers from the PAN-2013 and PAN-2014 workshops, we include all Greek datasets from the PAN workshop series for comprehensive coverage. Juola and Stamatatos (2013) delivered a corpus for the PAN-2013 author identification task, which contains documents in Greek, English, and Spanish. The Greek part of the corpus comprises newspaper articles published in a Greek weekly newspaper,⁴² from 1996 to 2012. The authors organized the Greek corpus into 50 verification task groups, where each group comprises documents with known authors and one document with an unknown author. Grouping criteria included genre, theme, date of writing, and stylistic relationships. Stamatatos et al. (2014) provided a larger corpus for the PAN-2014 author identification task, consisting of 200 verification task groups of documents and including Dutch in addition to the previously mentioned languages.

Unlike PAN-2013, no stylistic analysis was conducted on the texts to identify authors with very similar styles or texts of the same author with notable differences. The corpus of the following year of the PAN author identification task (Stamatatos et al. 2015), i.e. PAN-2015, maintains the same size and languages as PAN-2014 but allows for cross-topic and cross-genre author verification by not assuming that all documents match in genre and topic. Stamatatos et al. (2016) introduced a dataset for the PAN-2016 author clustering task, including documents in Greek, English, and Dutch, spanning two genres (articles and reviews) and covering various topics. The Greek part of the corpus comprises six document groups specifically designed for author clustering and authorship-link ranking purposes.

Additionally, Halvani, Winter, and Pflug (2016) provided the test part of their dataset, which includes 120 recipes and 70 news articles, but it does not have a license. Juola, Mikros, and Vinsick (2019) performed authorship attribution on Greek and English student essays, which were written by one hundred students following specific instructions. In contrast, Mikros (2013, 2012) focused on identifying gender in news texts and blogs, creating datasets that are equally balanced in terms of gender and topic, with gender and topic information provided by the distributors.

Table 11

Datasets related to authorship analysis with information on availability (Lmt: limited availability, No: no information provided; tags are linkable except for No; see Table 3 for details), annotation type (see Table 4 for details), size, size unit, and domain.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	DOMAIN
Stamatatos et al. (2016)	Yes	MANUAL	330	DOCUMENT	ARTICLES, REVIEWS
Stamatatos et al. (2015)	Yes	MANUAL	393	DOCUMENT	NEWS
Stamatatos et al. (2014)	Yes	MANUAL	385	DOCUMENT	NEWS
Juola and Stamatatos (2013)	Yes	MANUAL	120	ARTICLE	NEWS
Halvani, Winter, and Pflug (2016)	Lmt	CURATED	190	RECIPE, ARTICLE	COOKING, VARIOUS
Juola, Mikros, and Vinsick (2019)	No	MANUAL	200	ESSAY	PERSONAL & ACADEMIC TOPICS
Mikros (2013)	No	CURATED	479,439	WORD	SCIENCE, SOCIETY, ECONOMY, ART
Mikros (2012)	No	CURATED	406,460	WORD	BLOG

⁴² <https://www.tovima.gr/>

9.4 Summary of Authorship Analysis in Greek

Authorship Analysis studies in Greek address all three primary tasks: authorship attribution, verification, and profiling. A significant contribution to this field is the inclusion of Greek benchmark datasets in the PAN workshop series (from PAN-2013 to PAN-2016 workshops), dedicated to digital text forensics and stylometry. The availability of Greek datasets through this workshop series has played a pivotal role in advancing authorship analysis research for Greek, with many early studies using these datasets.⁴³ This initial boost, however, was not followed after 2016, making this track less popular compared to others (Fig. 4). The most recent study retrieved dates back to 2019, with the majority of studies concentrated between 2012 and 2017. Recent global advancements in authorship analysis tasks, e.g., deep and transfer learning (Savoy 2020), are not yet met in Greek. Additionally, the evolution in the field has introduced new tasks, such as bots profiling, author obfuscation, and style change detection, areas for which no relevant studies were found in the Greek context (Potthast et al. 2019).

10. Ethics and NLP

10.1 Track Description

Within the thematic domain of Ethics and Natural Language Processing (NLP), a wide range of topics is addressed globally, encompassing issues such as overgeneralization, dual use of NLP technologies, privacy protection, bias in NLP models, underrepresentation, fairness, and Toxicity Detection, among others (Hovy et al. 2017). Studies pertaining to Greek within this domain primarily focus on **Toxicity Detection**, which regards the automated identification of abusive, offensive, or otherwise harmful user-generated content (more details about definitions are in Appendix 15). This task is a necessity for online content moderation, including social media moderation, content filtering, and prevention of online harassment, all aimed at fostering a safer and more respectful online environment (Schmidt and Wiegand 2017). An exception to the many toxicity detection studies in Greek is the work of Ahn and Oh (2021) that explores ethnic bias detection in Large Language Models (LLMs) (discussed in §4).

Toxicity detection has raised heated debates like no other NLP task. Criticism focuses mainly on datasets and the way researchers approach the problem, often oversimplifying the issue and disregarding the variety of use cases (Díaz et al. 2022). Toxicity can be interpreted differently depending on factors like social group membership, social status, and privilege, leading to unequal impacts on marginalized communities. (Welbl et al. 2021). A second point of criticism highlights the fact that commonly used datasets, where the models are trained and evaluated on, often lack sufficient context to allow reliable judgements (Pavlopoulos et al. 2020; Hovy and Yang 2021). Lastly, it is highlighted that the definition of toxicity is subjective and dependent on the annotator's perspective (Sap et al. 2019; Gordon et al. 2022). These elements, however, are seldom incorporated in research tasks, negatively influencing the task framing and the implementation of automated systems. Furthermore, differences in the interpretation of toxicity are reflected in the developed datasets and models (Sap et al. 2019; Gordon et al. 2022).

⁴³ In contrast, a shared-task (El-Haj et al. 2022) and a workshop (Giannakopoulos 2013) in Summarization (§15), which also provided Greek corpora, not succeeded in attracting attention to the summarization task for Greek.

10.2 Ethics and NLP in Greek: Language Models and Methods

Toxicity Detection - Multilingual Shared Task. In 2020, a subtask of offensive language identification for Greek was introduced as part of the SemEval-2020 Task 12 on Multilingual Offensive Language Identification in Social Media (OffensEval-2020⁴⁴) (Zampieri et al. 2020). The task focused on four other languages besides Greek: Danish, English, Turkish, and Arabic. Overall, 145 teams submitted official runs on the test data, 37 of which made an official submission on Greek, while the submissions for English were approx. the double, i.e. 81. The majority of the high-ranked submissions Ahn et al. (2020); Wang et al. (2020); Socha (2020); Safaya, Abdullatif, and Yuret (2020) opted for large-scale pre-trained Transformers, with BERT being the most prominent among them.

Toxicity Detection - Greek Shared Task Subtask. The Greek dataset used for the SemEval subtask is an extended version of the Offensive Greek Tweet Dataset (OGTD), which was developed by Pitenis, Zampieri, and Ranasinghe (2020). In their original article, the authors trained Machine Learning (ML) classifiers on extracted features, including Term Frequency - Inverse Document Frequency (TF-IDF) unigrams, bigrams, Part of Speech (POS) and dependency relation tags and obtained their best results from a Deep Learning (DL) network, feeding word embeddings Outsios et al. (2018) to Long Short-Term Memory (LSTM) and Gated Recurrent Unit (GRU) cells equipped with self-attention (Plum et al. 2019).⁴⁵ The same extended version of OGTD was used by Ranasinghe and Zampieri (2021) to perform offensive language identification in Greek, by applying cross-lingual contextual word embeddings and transfer learning. They fine-tuned XLM-RoBERTa (XLM-R) (Conneau et al. 2019) on English offensive language data (OLID) (Zampieri et al. 2019), and then used it to classify texts in Greek. They used the same methodology for other 6 low-resource languages.⁴⁶

Toxicity Detection by Companies. Major companies and social media platforms, such as Meta, Twitter, and Reddit.⁴⁷ have shown their interest for automated detection of toxic content. This has been true early enough also for Greek. Considering both fully and semi-automatic user content moderation in Gazzetta sports portal⁴⁸ comments, Pavlopoulos, Malakasiotis, and Androutsopoulos (2017) equipped a GRU-based Recurrent Neural Network (RNN) with a self-attention mechanism for toxicity detection. Their results suggested that an ablated version, using only the self-attention and disregarding the RNN, performs considerably well given its simplicity. In a different study on the same data, the authors showed that user embeddings lead to improved performance (Pavlopoulos et al. 2017).

Hate Speech. Research focusing on the phenomenon of hate speech targeting specific groups has garnered significant interest. Greece, serving as a primary entry point for a large number of immigrants arriving in Europe, has witnessed the emergence of xenophobic and racist opinions directed towards immigrants and refugees. Arcila-Calderón et al. (2022) tackled with racist and/or xenophobic hate speech detection on tweets for Greek, Spanish and Italian using BERT-based Language Models (LMs). The same task was addressed by Perifanos and Goutsos (2021), also for Greek but with a multi-modal approach, in

⁴⁴ <https://sites.google.com/site/offensevalsharedtask/offenseval-2020>

⁴⁵ The source code of Pitenis, Zampieri, and Ranasinghe (2020) is available at <https://github.com/tharindudr/aggression-detection-greek>.

⁴⁶ The source code is available at https://github.com/tharindudr/offenseval_2020

⁴⁷ <https://transparency.fb.com/el-gr/policies/community-standards/hate-speech/>, <https://help.twitter.com/en/rules-and-policies/hateful-conduct-policy>

⁴⁸ <http://www.gazzetta.gr/>

order to take into account hateful content that does not necessarily carry textual streams, i.e. images. For the text modality, they used GreekBERT and they also created the BERTaTweetGR LM (see Table 5), while for joint representations of text and tweet images they used a single model combining the representations of BERT and ResNet models. Pontiki et al. (2020) performed verbal aggression analysis on twitter data. They identified different aspects of verbal aggression related to predefined targets of interest. Lekea and Karampelas (2018) detected hate speech within terrorists manifestos, classifying these manifestos into three categories: no hate speech, moderate hate speech, and apparent hate speech. Finally, Nikiforos, Tzanavaris, and Kermanidis (2020) detected bullying within Virtual Learning Communities (VLCs) and applied linguistic analysis aiming to recognise behaviour patterns.

10.3 Ethics and NLP in Greek: Language Resources

Table 12 presents the relevant Language Resources (LRs) in Greek, along with their availability (see Table 3), annotation type (see Table 4), size, and the type of content targeted for detection. Only one dataset is publicly available, licensed, and accessible to us at the time of this study. Half were publicly available studies with licensing issues, one was non accessible, and two were not publicly available (both with very few data). Half of the studies regarded tweets and two of the studies comprised more than a million of user-generated posts.

Table 12

Datasets designed for toxicity detection related tasks, with information on availability (Yes: publicly available, Lmt: limited availability, Err: unavailable, No: no information provided; tags are linkable except for No; see Table 3 for details), annotation type (see Table 4 for details;† indicates unclear annotation process), size, size unit, detection class.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	CLASS
Zampieri et al. (2020)	Yes	MANUAL	10,287	TWEET	OFFENSE
Perifanos and Goutsos (2021)	Lmt	MANUAL	4,004	TWEET	TOXICITY
Pontiki et al. (2020)	Lmt	AUTOMATIC	4.490M	TWEET	XENOPHOBIA
Pavlopoulos, Malakasiotis, and Androutsopoulos (2017)	Lmt	MANUAL	1,450,000	COMMENT	TOXICITY
Arcila-Calderón et al. (2022)	Err	MANUAL	15,761	TWEET	RACISM, XENOPHOBIA
Nikiforos, Tzanavaris, and Kermanidis (2020)	No	MANUAL	583	SENTENCE	BULLYING
Lekea and Karampelas (2018)	No	AUTOMATIC†	81	MANIFESTO	TERRORISM

Pitenis, Zampieri, and Ranasinghe (2020) introduced a dataset comprising 1,401 offensive and 3,378 non-offensive tweets, sourced from popular and trending hashtags in Greece, keyword queries containing sensitive or obscene language, and tweets featuring /eisai/ (“you are”) as a keyword. Zampieri et al. (2020) extended this dataset for OffensEval-2020, increasing the total to 10,287 tweets. The extension involved manual annotation by three annotators, with the final label determined by majority voting among the annotators.

Perifanos and Goutsos (2021) curated 1,040 racist and/or xenophobic hate-speech tweets and 2,964 non-hate-speech tweets, providing tweet IDs along with code for obtaining their visual appearance as they would have been rendered in a web browser. Their dataset reflects an overlap of neo-Nazi, far-right, and alt-right social media accounts systematically targeting refugees, LGBTQ activists, feminists, and human rights advocates. The dataset was annotated by three human rights activists. The final label for each tweet was determined by majority voting among the annotators. Pontiki et al. (2020) gathered a dataset of 4,490,572 tweets exhibiting verbal attacks against ten predefined target groups during the financial crisis in Greece. The dataset has limited availability as it does not include the tweets or tweet IDs. Pavlopoulos, Malakasiotis, and Androutsopoulos (2017) offered 1.6 million manually moderated

user-generated encrypted comments from Gazzetta,⁴⁹ a Greek sports news portal. Arcila-Calderón et al. (2022) provided a multilingual dataset containing records of racist/xenophobic hate speech from various sources such as news articles, as well as Twitter, YouTube, and Facebook. The content within the dataset is written in Greek, Italian, and Spanish languages. Nikiforos, Tzanavaris, and Kermanidis (2020) developed a manually annotated corpus on bullying within VLCs using conversations from Wikispaces. The corpus was annotated by two annotators; however, they did not publicly release the dataset. Finally, Lekea and Karampelas (2018) annotated manifestos authored by members of the terrorist organization 17 November with hate speech tags (moderate/apparent/no hate speech). However, they did not publicly release these annotated documents, and details regarding the annotation process were not clearly specified in their publication.

10.4 Summary of Ethics and NLP in Greek

Studies concerning Ethics and NLP in the context of Greek language are predominantly focused on Toxicity Detection rather than addressing issues related to Responsible AI, Data Ethics, or Privacy Preservation. Toxicity Detection in Greek has been facilitated with the setting of a multilingual shared task. The Greek subtask attracted approximately half the submissions compared to its English counterpart. Additional studies on Toxicity Detection involve collaborations with private companies and others specifically targeting hate speech against certain groups. Reflecting on the toxicity detection methods and LRs available for Greek, it becomes evident that published studies are more concerned with social issues pertinent to Greek society (Arcila-Calderón et al. 2022; Perifanos and Goutsos 2021; Lekea and Karampelas 2018; Nikiforos et al. 2021) rather than improving existing methods or sharing new LRs. With few exceptions emphasizing hate speech detection from a social perspective (Nikiforos, Tzanavaris, and Kermanidis 2020; Lekea and Karampelas 2018), the predominant approach in this domain relies heavily on DL techniques. Notably, shared language resources for Greek often lack consideration for conversational context, aligning with a global trend observed in toxicity detection research (Pavlopoulos et al. 2020). Furthermore, studies predominantly target social groups responsible for generating hate speech, overlooking hate speech originating from marginalized groups, who may perceive it as a means of self-defense or asserting their rights.

11. Question Answering

11.1 Track Description

Question Answering (QA) aims to automatically answer user questions in natural language (Zhu et al. 2021). There are several real-world applications linked to QA, ranging from decision or customer support systems (Goodwin and Harabagiu 2016; Li et al. 2018), chatbots (Adamopoulou and Moussiades 2020), and personal assistants (de Barcelos Silva et al. 2020). Given a question such as “Which is the birthplace of Plato?”, a QA system is expected to predict the correct answer: “Athens”. However, QA can be very broad in terms of the questions that can be asked (Gardner et al. 2019). For example, a statement such as “My name is John”, which is not a question, could receive an answer of the form “That is a nice name” or “Nice to meet you, John”, or so.

⁴⁹ <http://www.gazzetta.gr/>

The QA Format. The QA format can have multiple variations. For instance, it can extract the answer from a given knowledge base (unstructured or structured, e.g., documents, a database) or it can generate the text of the answer without any such support, as is the case of ChatGPT (Table 13).⁵⁰ These systems can be

QUESTION	ANSWER
<i>What might be the future impact of widespread AI integration in daily life?</i>	In a future with ubiquitous AI, we could experience personalized and efficient services, enhanced decision-making support, and seamless automation across various aspects of daily life, transforming the way we work and interact with technology.

Table 13

Dialogue with ChatGPT to illustrate the generative approach where a model generates answers without relying on a predefined knowledge base

further classified based on various criteria, such as the nature of the questions and the types of answers they require (factoid vs non-factoid). Additionally, classification can be based on the breadth of domain coverage and the sources of knowledge employed to generate answers (closed-domain vs open-domain) (Chen and Yih 2020).

QA Evaluation. A QA system is usually trained and evaluated on an appropriate dataset, tackling tasks such as Natural Language Understanding (NLU), Information Retrieval (IR), reasoning, and world modelling (Rogers, Gardner, and Augenstein 2023; Schlegel et al. 2020; Sugawara et al. 2017). These evaluations serve to measure the system’s performance across different aspects of language understanding and response generation.

11.2 Question Answering in Greek: Language Models and Methods

Existing QA systems for Greek all use extractive algorithms, extracting answers from given knowledge bases. Mountantonakis et al. (2022) introduced an open-domain, factoid cross-lingual QA system. Specifically, they translated user questions from Greek to English and used English BERT-based QA models to retrieve answers from DBpedia abstracts.⁵¹ The answers were then translated back to Greek before being returned to the user. Additionally, the context from which answers are retrieved, known as the knowledge base, can also be structured data, as demonstrated by Tsampos and Marakakis (2023) and Marakakis, Kondylakis, and Aris (2017), who employed closed-domain factoid QA systems. Tsampos and Marakakis (2023) created a medical QA system by syntactically analyzing texts and representing the dependency parse tree as nodes and relationships in a graph database. User queries were transformed into database queries, and rule-based matching methods were used to return the answer in natural language. Marakakis, Kondylakis, and Aris (2017) converted the user’s question into a database query, searched the database, and combined the noun and verb phrase of the question with the response to form an answer in natural language.

⁵⁰ <https://chat.openai.com/>

⁵¹ <https://www.dbpedia.org/>

Off-the-shelf services have been used to build QA systems, providing conversational interfaces even without any programming knowledge (Braun et al. 2017). Specifically, Malamas, Papangelou, and Symeonidis (2022) and Ventoura et al. (2021) developed e-healthcare assistants, the latter providing information and support specifically for the Covid19 pandemic. Both these studies used a NLU service,⁵² in order to generate the answer, which first extracted the intent (e.g., pharmacy finder) and the entities (e.g., “city”, “time”) from the question (e.g. “What pharmacies will be open in Athens tomorrow morning at 8?”).

11.3 Question Answering in Greek: Language Resources

Table 14 presents the QA Language Resources (LRs) for Greek. In terms of monolingual QA LR, Mountantonakis et al. (2022) curated an evaluation dataset for QA systems, comprising 20 texts of diverse subjects, derived from a Greek text bank,⁵³. For each of these 20 texts, they crafted 10 questions along with their respective golden answers, resulting in a total of 200 questions and answers. Lopes et al. (2016) offer a dataset of audio recordings and the respective transcriptions of 200 dialogues collected from call center interactions regarding movie inquiries. This dataset, available upon request, is also manually annotated on gender, task success, anger, satisfaction and miscommunication annotations, rendering it suitable for a range of Natural Language Processing (NLP) tasks beyond QA. Additionally, we have addressed a promising initiative by the Artificial Intelligence Team of University of Athens⁵⁴ to create a Greek QA dataset⁵⁵, though it remains unavailable as of the time of writing.

Multilingual LR can be used to overcome the existing barriers for low-resource languages. Only a few include Greek and could therefore be used to build a QA system. Here, we introduce multilingual QA datasets that were not initially retrieved through our search protocol, but were accessed via the Hugging Face repository to ensure their inclusion for comprehensive Greek NLP research purposes. Among them, XQuAD (Artetxe, Ruder, and Yogatama 2019) stands out as a cross-lingual QA dataset comprising 1,190 question-answer pairs derived from the development set of SQuAD v1.1 (Rajpurkar et al. 2016), along with their professional translations into ten languages, including Greek. In contrast, XQuAD-R (Roy et al. 2020) serves as a retrieval version of XQuAD. Lastly, MQA (De Bruyn et al. 2021) is a multilingual corpus of questions and answers parsed from Common Crawl⁵⁶, making it unique as it includes data written in Greek rather than translated from English.

Table 14

QA datasets, indicating availability (Yes: publicly available, Lmt: limited availability; tags are linkable except for datasets available upon request; see Table 3 for details), annotation type (see Table 4 for details), the size of the Greek part of the dataset, size unit, and (if it is multilingual) whether it is a translation from English.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	TRANSLATED
De Bruyn et al. (2021)	Yes	USER-GENERATED	1.77M	QUESTION-ANSWER PAIR	NO
Roy et al. (2020)	Yes	MANUAL	1,190-1,234	QUESTION-CANDIDATE ANSWER	YES
Artetxe, Ruder, and Yogatama (2019)	Yes	MANUAL	1,190	QUESTION-ANSWER PAIR	YES
Mountantonakis et al. (2022)	Lmt	MANUAL	200	QUESTION-ANSWER PAIR	N/A
Lopes et al. (2016)	Lmt	MANUAL	200	DIALOGUE	N/A

⁵² <https://rasa.com/>

⁵³ <https://www.greek-language.gr/certification/dbs/teachers/index.html>

⁵⁴ <https://ai.di.uoa.gr/>

⁵⁵ <https://greekqa.di.uoa.gr/>

⁵⁶ <https://commoncrawl.org/>

11.4 Summary of Question Answering in Greek

Reflecting on the QA LR architectures available for Greek, several observations emerge. Firstly, there is a notable scarcity of monolingual QA language resources tailored specifically for Greek. Consequently, the reliance on multilingual QA LR architectures becomes essential for advancing Greek NLP tasks. Notably, MQA (De Bruyn et al. 2021) stands out as the sole multilingual LR, and not a translation from English, applicable to Greek QA, using a representative sample of Greek questions. This aligns with the observation by Rogers, Gardner, and Augenstein (2023) that multilingual QA benchmarks aim for homogeneity across languages and, thus, may disregard natural or representative samples of individual languages. Furthermore, the landscape of QA architectures developed for Greek remains relatively underexplored, with only a few studies addressing this domain thus far. Remarkably, there has been no proposition of a Deep Learning (DL)-based QA solution tailored specifically for Greek, possibly attributable to the absence of dedicated monolingual QA LR architectures for the language.

12. Machine Translation, Multilingualism, and Cross-Lingual NLP

12.1 Track Description

This section concerns studies handling multiple languages in Natural Language Processing (NLP), including Greek. The most typical canonical task under this thematic domain is Machine Translation (MT), which is the task of automated translation from one natural language to another. Emerged as one of the earliest tasks a computer could possibly solve, it was inspired by Warren Weaver's "translation memorandum" in 1947 and IBM's word-for-word translation system in 1954 (Hutchins 1997). Greek is considered as a mid-resource language regarding MT, considering the sufficient number of parallel corpora available for training MT systems (§12.3). Most of the work is focused on evaluation and using MT for data augmentation or to enable NLP tools in other languages.

12.2 Machine Translation, Multilingualism, and Cross-Lingual NLP in Greek: Language Models and Methods

MT. Kouremenos, Ntalianis, and Kollias (2018) developed a rule-based MT system between Greek and Greek Sign Language (GSL) for producing parallel corpora of Greek and GSL glossed text.⁵⁷ The authors opted for a rule-based approach due to the absence of a standardized writing system for GSL, the scarcity of publicly available GSL grammar resources and Greek-GSL parallel data. Beinborn, Zesch, and Gurevych (2013) focused on the automatic production of cognates using character-based MT, applying their method on language pairs with different alphabets, specifically from English to Greek, Russian, and Farsi. They aimed to identify not only genetic cognates,⁵⁸ but also words that are sufficiently similar to be associated by a language learner.⁵⁹ Their approach relied on phrase-based Statistical Machine Translation (SMT) using the MOSES framework (Koehn et al. 2007), but instead of translating phrases, they transformed character sequences from one language into the other, using words instead of sentences and

⁵⁷ In this context, glossing is a method for representing the meaning and grammatical structure of signed language in written form.

⁵⁸ Two words in two languages are considered as genetic cognates when they have the same etymological origin (Crystal 2011).

⁵⁹ For example, the English word "strange" has the Italian correspondent "strano". The two words have different roots and are therefore genetically unrelated. For language learners, however, the similarity is more evident than for example the English-Italian genetic cognate father-padre.

characters instead of words. The goal of Pecina et al. (2012) was to adapt a general-domain SMT system to specific domains by acquiring in-domain monolingual and parallel data through domain-focused web-crawling. The authors specifically focused on two language pairs: English–Greek and English–French; and two domains: Natural Environment and Labour Legislation.

Studies focusing on the evaluation of MT systems have consistently demonstrated the superior performance of Neural Machine Translation (NMT) over SMT. Mouratidis, Kermanidis, and Sosoni (2021) tackled MT evaluation specifically for the English–Greek and English–Italian language pairs. They developed a Deep Learning (DL) framework using a Recurrent Neural Network (RNN) that incorporated linguistic features, word embeddings, and automatic MT metrics. The evaluation was conducted on small and noisy datasets comprising educational video subtitles. In an earlier study, Stasimioti et al. (2020) also considered human evaluation, taking into account factors such as post-editing effort, adequacy and fluency ratings, and error classification.⁶⁰ Also, Castilho et al. (2018), performed a quantitative and qualitative comparative evaluation of SMT and NMT, using automatic metrics and input from a small group of professional translators. The evaluation focused on the translation of educational texts in four language pairs: English to Greek, German, Portuguese and Russian. These studies contribute to the understanding of MT system evaluation and highlight the advantages of NMT over SMT in terms of performance.

Multilingualism. The studies discussed below, investigate various aspects of language analysis and processing across multiple languages. Giorgi et al. (2021) developed a cognitive architecture based on a large-scale neural network, for processing and producing four natural languages simultaneously, exhibiting disambiguation in semantic and grammatical levels. It was evaluated through two approaches: individual training for each language and cumulative training across all languages, showing competence in comprehending and responding to questions in a preschool literature context. Gamallo, Pichel, and Alegria (2020) focused on measuring the intra linguistic distances between six isolated European languages (incl. Greek), and the inter distances with other European languages. Various linguistic measures were deployed to assess the distance between language pairs. Fragkou (2014) conducted language identification. The author used forums containing content written in Greek, English, and Greeklish, and employed techniques borrowed from topic change segmentation. Bollegala, Kontonatsios, and Ananiadou (2015) detected automatically translations for biomedical terms, introducing also a dimensionality reduction technique.

Cross-Lingual NLP. MT can assist in overcoming the lack of Greek Language Resources (LRs). That is either through data augmentation or by enabling the use of English LRs and leveraging NMT models to bridge the language gap. Moreover, multi-lingual Large Language Models (LLMs) facilitate the knowledge transfer across languages. Papaioannou et al. (2022) investigated cross-lingual knowledge-transfer strategies for clinical phenotyping. They evaluated three approaches, namely: 1) translating Greek and Spanish notes into English before using a medical-specific English encoder, 2) using multi-lingual encoders (Conneau et al. 2020), and 3) expanding multi-lingual encoders with adapters (Pfeiffer et al. 2020). Their findings indicated that the second approach lags behind the other two, but they also recommended preferred method for various scenarios.⁶¹

60 Previous studies of the same team retrieved by our search protocol dealing with MT evaluation are Mouratidis, Kermanidis, and Sosoni (2020); Mouratidis and Kermanidis (2019)

61 The source code is available at <https://github.com/neuron1682/cross-lingual-phenotype-prediction/tree/main>.

The rest of the studies discussed here employed data augmentation techniques or translation to English for using English systems for task resolution. To augment their data, Athanasiou and Maragoudakis (2017) automatically translated original Greek data to English, using afterwards both the original and the translated data for Sentiment Analysis (SA) (§8). Manias et al. (2020) investigated the impact of NMT on SA by comparing English Deep Neural Network (DNN) Language Models (LMs) for SA (§8) when applied to both source (English) and target (Greek, German) languages. Singh et al. (2019) did not use augmentation but proposed a cross-lingual augmentation approach, by replacing part of the natural language input with its translation into another language (assessing 14 languages, including Greek), in Natural Language Inference (NLI) (§6) and QA (§11). For the latter task, Mountantonakis et al. (2022) translated user questions from Greek to English, employing English Question Answering (QA) LMs for answer retrieval and then translating the answers back to Greek. Similarly, Papadopoulos, Papadakis, and Matsatsinis (2021) developed Transformer-based NMT from English to Greek and from Greek to English.⁶² By using, then, the English translations of Greek texts as input, Open Information Extraction (Open IE) (§7) in English was performed and the responses were translated back to Greek. A similar strategy was followed by Shukla et al. (2022), the top team in a financial narrative summarization shared task (El-Haj et al. 2022), who used text classification for English reports and then translated the top-rated narrative sections to Greek (and Spanish) (§15). MT has also been used in SA for Greek, to allow English lexicon-based feature extraction (Chatzakou, Vakali, and Kafetsios 2017).

12.3 Machine Translation, Multilingualism, and Cross-Lingual NLP in Greek: Language Resources

Table 15 presents multilingual LRs created by the studies discussed in this track. Prokopidis, Papavasiliou, and Piperidis (2016) created multilingual corpora (756 language pairs) from content available in Global Voices, where volunteers publish and translate news stories in 41 languages. The resource of Bollegala, Kontonatsios, and Ananiadou (2015) consists of pairs of biomedical terms in multiple languages, comprising also the corresponding character n-gram and contextual features. Giorgi et al. (2021) created a dataset simulating parent-child verbal interactions, featuring a fictional 4-year-old. Initially in English, the dataset includes around 700 sentences (declarative and interrogative), translated into Greek, Italian, and Albanian.

Table 15

Parallel LRs, containing Greek, with information on availability (Yes: publicly available, Lmt: limited availability, No: no information provided; tags are linkable except for No; see Table 3 for details), annotation type (see Table 4 for details), size, size unit, number of languages, and language pairs.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	LANGUAGES	LANGUAGE PAIRS
Prokopidis, Papavasiliou, and Piperidis (2016)	Yes	USER-GENERATED	302,617	DOCUMENT PAIR	41	756
Bollegala, Kontonatsios, and Ananiadou (2015)	Lmt	AUTOMATIC	-	TERM	5	4
Giorgi et al. (2021)	No	MANUAL	700	SENTENCE	4	n/a

Multilingual datasets for MT comprising Greek can be found in online repositories, such as Hugging Face or the CLARIN:EL repository. For instance, Hugging Face currently hosts a collection of 35

⁶² <https://huggingface.co/lighteternal>

multilingual parallel corpora,⁶³ and 49 multilingual LMs,⁶⁴ where Greek is one of the many languages. Additionally, CLARIN:EL repository hosts 25 multilingual and 200 bilingual corpora, with many of them derived from the multilingual datasets within the repository. Hence, the availability of potential LRs for MT in Greek (e.g., in [Hugging Face](#)) is not reflected by the respective number of studies in our survey. This is mainly due to the fact that our search protocol (§3.1, Appendix 15) could not capture recent research NMT encompassing numerous languages not explicitly mentioned in the title or the abstract. However, our online repository will be hopefully updated with new resources becoming available over time as well as with links to other publicly available Greek resources.

12.4 Summary of Machine Translation, Multilingualism, and Cross-Lingual NLP in Greek

Work related to MT, multilingualism, and cross-lingual NLP in Greek regards mainly studies for evaluation and usage for augmentation and transformation purposes. Although LRs appear to be limited in our survey (Table 15), we also note that available useful Greek resources exist online, not necessarily described in literature or not explicitly mentioning all the languages in the title or the abstract. That is because building NMT models per language pair is impractical, even when parallel data are available ([Haddow et al. 2022](#)). Instead, multilingual NMT models enable translation between multiple language pairs using a single model ([Dabre, Chu, and Kunchukuttan 2020](#)).

13. NLP Applications

13.1 Track Description

Besides the thematic topics discussed thus far, this section presents studies with Natural Language Processing (NLP) applications in various domains, which for Greek are three: business, education, and legal.

13.2 NLP Applications in Greek: Language Models and Methods

The studies we have identified leverage NLP tasks for applications in legal, business, and educational domains.

Legal. [Papaloukas et al. \(2021\)](#) engaged in multi-class legal topic classification, leveraging a range of techniques, from traditional Machine Learning (ML) techniques to Recurrent Neural Network (RNN)-based methods, and multilingual and monolingual transformer-based methods, highlighting the efficacy of monolingual transformer models. [Lachana et al. \(2020\)](#) created an information retrieval tool for legal documents, where users can search for legal documents based on their unique number, keywords, or individual articles. The system retrieves correlations among Greek laws based on their number format, extracts tags from legal documents using Term Frequency - Inverse Document Frequency (TF-IDF), and decomposes laws into their articles using regular expressions. [Garofalakis, Plessas, and Plessas \(2016\)](#)

63 Accessed on June 15, 2023: https://huggingface.co/datasets?task_categories=task_categories:translation&language=language:el&sort=downloads

64 Accessed on June 15, 2023: https://huggingface.co/models?pipeline_tag=translation&language=el&sort=downloads created by only 7 teams.

proposed a system based on regular expressions and pattern matching to locate and update new laws for the purpose of consolidating the historical revisions of legal documents.

Business. [Paraskevopoulos et al. \(2022\)](#) classified safety reports and workplace images. They employed a multimodal fusion pipeline, experimenting with transformer-based text encoders, a visual transformer-based model, and a visual CNN-based architecture, for predicting workplace safety audits.⁶⁵ [Boskou, Kirkos, and Spathis \(2018\)](#) assessed internal audit by combining 26 internal audit criteria into a single quality measure and using Linear Regression with TF-IDF.

Education. [Chatzipanagiotidis, Giagkou, and Meurers \(2021\)](#) focused on readability classification for Greek. The task aims at assessing whether a text is appropriate for a given group of readers with varying education level, such as first (L1) or second language proficiency (L2), or in terms of special needs (e.g., due to cognitive disabilities). Using handcrafted features and conventional ML algorithms, the authors classified textbooks covering various school subjects and Greek as a second language.

13.3 NLP Applications in Greek: Language Resources

Table 16 displays the datasets related to Greek NLP Applications. The dataset presented by [Papaloukas et al. \(2021\)](#), consisting of legal resources from Greek legislation, is the only publicly available one. The corpus comes from a collection of Greek legislative documents, titled “Permanent Greek Legislation Code - Raptarchis”, classified from broader to more specialized categories. [Garofalakis, Plessas, and Plessas \(2016\)](#) provided an alpha version of historical consolidation of 320 laws of the period 2004-2015, including the history of their revisions. [Paraskevopoulos et al. \(2022\)](#) shared a multi-modal dataset (upon request), containing 5,344 safety-related observations reported by 86 Safety Officers after inspecting 486 sites. Each observation includes a brief description of the issue, accompanying images, relevant meta-data, and a priority score. [Lachana et al. \(2020\)](#) obtained a subset of Greek laws from the Government Gazette, establishing connections between the laws and categorizing the modification type of each law. Lastly, [Boskou, Kirkos, and Spathis \(2018\)](#) compiled a corpus from the internal audit texts found in the annual reports of 133 Greek publicly traded companies for the year 2014. The texts were manually evaluated against 26 internal audit quality criteria. However, information on how to access the latter two datasets was not provided in the studies.

Table 16

Datasets related to NLP Applications with information on availability (Yes: publicly available, Lmt: limited availability, No: no information provided; tags are linkable except for No; see Table 3 for details), annotation type (see Table 4 for details; † indicates unclear annotation process), size, size unit, domain, and annotation type.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	DOMAIN	ANNOTATION TYPE
Papaloukas et al. (2021)	Yes	CURATED†	47,563	DOCUMENT	LEGAL	TOPIC CLASS
Garofalakis, Plessas, and Plessas (2016)	Lmt	AUTOMATIC	3,209	DOCUMENT	LEGAL	LAW REVISION
Paraskevopoulos et al. (2022)	Lmt	MANUAL	5,344	ISSUE	INDUSTRY	SAFETY OBSERVATION
Lachana et al. (2020)	No	AUTOMATIC	70	DOCUMENT	LEGAL	LAW REVISION
Boskou, Kirkos, and Spathis (2018)	No	MANUAL	133	DOCUMENT	FINANCE	INTERNAL AUDIT CRITERIA

⁶⁵ The source code is available at <https://gitlab.com/ilsp-spm-d-all/public/s4a-models-public>

13.4 Summary of NLP Applications in Greek

Greek NLP Applications regard the domains of legal, business, and education. The approaches are often domain-specific, as for example consolidating historical revisions in the legal domain. Alternatively, they regard text classification tasks, such as assessing text readability education purposes. Also, approaches rather uncommon in the Greek NLP literature were employed, including multimodal ones, information retrieval, and topic classification.

14. Discussion

14.1 Challenges for Monolingual NLP Surveys

By undertaking a monolingual survey for Greek we were able to record two major challenges. We describe them next to assist future monolingual surveys irrespective of language.

Missed Multilingual Entries. Monolingual surveys operate on a reduced search space, because the name of the language in question is part of the query. This is particularly challenging for studies addressing a specific language in a multilingual context, because studies touching multilingual subjects will hardly mention explicitly the names of all the languages in their title or abstracts.

False Positives. On the other hand, the language name may be mentioned in the title or abstract not because it was the focus of the study, but for a variety of other reasons (e.g., in the case of Greek, etymology, terminology, classical studies, etc.). [Liu et al. \(2021\)](#), for example, while mentioning an English term that is derived from a Greek one, explicitly mention the language in the abstract, which confused our search.⁶⁶ Another example is the work of [Das, Das, and Mahesh \(2016\)](#), who referenced Ancient Greek, which falls out of the scope of this study.⁶⁷

This challenge of retrieving false positives was considerable for Greek. This is showcased by the following observation: we compared the search results in Google Scholar for specific languages, sampled from well-supported (i.e., first tier) or moderately supported (i.e., second tier) languages (Figure 1). A search for the German language, which belongs to the first tier, yielded 5,100,000 results, for Arabic (first tier) 3,010,000, for Finnish (second tier) 2,440,000, and for Latin (second tier) 4,700,000. Greek (second tier) returned 4,840,000 results, a number that is comparable or higher than languages with stronger support.

Our search protocol limited the search for the language name, i.e. “Greek”, to the title or abstract of the papers. Meanwhile, the term “Natural Language Processing” was searched across the entire paper (see §3.1 for details). This approach retrieved 1,035 unique papers, of which 122 were relevant to the survey’s purpose. Although restricting the language name to the title or abstract might not capture all published papers for Greek Natural Language Processing (NLP), it was a necessary measure to reduce the high number of false positives that could have been returned without this limitation.

Monolingual NLP Survey Scarcity. The level of the challenge ultimately depends on the language, but both issues mentioned above (missed multilingual entries and false positives) apply for any language at

⁶⁶ The exact sentence was “Meme is derived from the Greek word “Mimema” and refers to the idea being imitated.”.

⁶⁷ The exact sentence mentioned in the abstract was: “Indian epics have not been analyzed computationally to the extent that Greek epics have.”.

some level. This extra difficulty may explain the scarcity of monolingual NLP surveys more generally. By retrieving language-specific NLP surveys from Google Scholar, published during the period from 2012 to 2023, we found that only the 25% of well- and moderately-supported languages have monolingual surveys for NLP (see §2.3.2). These surveys, however, do not provide the search protocol used, hindering reproducibility and interpretability, and do not classify the available Language Resources (LRs) for quality and licensing, which makes them of limited use for experiments with multilingual and Large Language Models (LLMs).

14.2 Greek NLP Trends

From the outcomes of our survey we were able to extract insights regarding trends in the NLP tracks. These shed light on shifts in the prevalence of NLP thematic areas for Greek spanning a decade. Figure 4 illustrates the relative track popularity, each presented as a time-series (bold blue line) that is as opposed to the rest of the tracks that appear in the background shadowed.

Sentiment Analysis (SA) emerges as the most prominent topic, constituting about a quarter of publications (see Figure 4), yet shows a declining trend since 2018, echoing global patterns (Rohatgi et al. 2023). Besides SA, the most popular tracks recently are Ethics and NLP, Question Answering (QA), and NLP Applications with their gained focus being likely driven by the rise of LLMs. This probably explains also the recent relative interest in Machine Learning (ML) for NLP.

Semantics experiences fluctuations with three peaks across the decade. The latest peak in 2020 is smaller than the initial peak in 2014, signalling a decline in interest after a small rise around 2018. Notably, Semantics studies in Greek predominantly focus on Lexical Semantics rather than Sentence-Level Semantics or Discourse Analysis. Syntax maintains interest within the Greek NLP community, particularly due to Grammatical Error Correction (GEC) task. This is in contrast with the global trends, as reflected in the shrinking number of submissions to ACL tracks focused on Syntax: Tagging, Chunking and Parsing (Rohatgi et al. 2023).

Summarization is the least popular among the NLP tracks, evidenced with only two studies serving as overviews of shared tasks (2013, 2022). Authorship Analysis shows a decline in interest, with the most recent paper dating back to 2019 and the majority of publications concentrated between 2012 and 2017. Notably, studies within this topic primarily focus on traditional tasks like author profiling, authorship attribution and verification, rather than exploring newer tasks such as robots profiling or style change detection.

14.3 Analysing Greek LRs

We compiled a list of Greek datasets and lexical resources, as these were generated by the authors of the retrieved studies. Then, we categorized each resource in the list based on its availability, licensing, and other pertinent characteristics. Our goal is to highlight high-quality, open-access, reusable datasets, to support the advancement of the field of Greek NLP.

Dataset availability. Overall, more than half of the Greek LR (58.1%) are considered as available by their creators. However, only 18.1% of these are publicly available and accessible without any limitations. The rest are either limited (24.8%) or yielded an HTTP error when we attempted to access them (15.2%). The limited accessibility refers to datasets that either lack associated licences (usually interpreted as exclusive copyright by the author), or pose restrictions (e.g., “available upon request”) or are accessible for a fee (e.g., annotated tweets, for which access may require a payment). Publicly available resources (e.g., men-

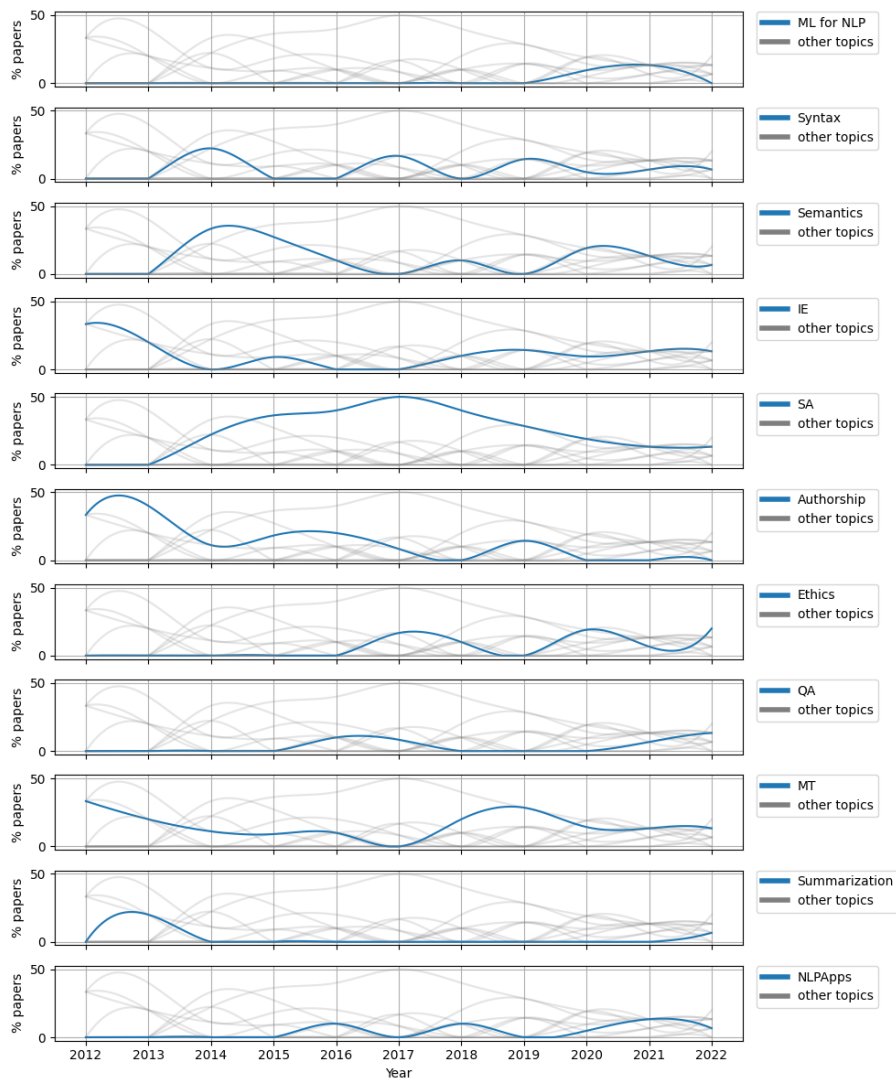


Figure 4

Relative popularity of tracks over time. Each time-series illustrates the relative percentage of studies per year for a specific track (bold blue line) with time-series of other tracks appearing shadowed in the background.

tioned in the study) that were not accessible to us (e.g., due to HTTP errors when accessed) were typically stored on web pages that may lack comprehensive curation, such as institutional repositories or personal websites. These web pages often do not provide the same preservation guarantees as established trusted data repositories, such as GitHub⁶⁸ (used by Korre, Chatzipanagiotou, and Pavlopoulos (2021); Kavros

⁶⁸ <https://github.com/>

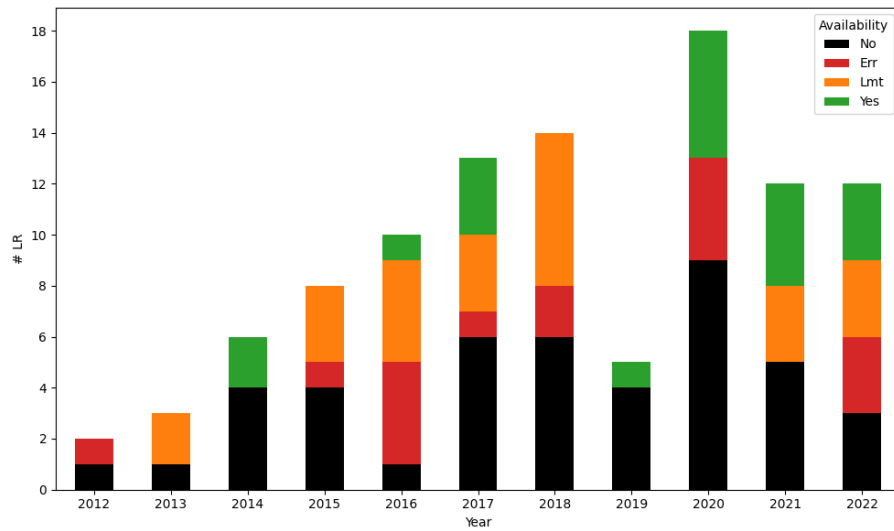


Figure 5

Number of Greek LR per year according to an availability classification (Yes: publicly available, Lmt: limited public availability, Err: unavailable, No: no information provided).

and Tzitzikas (2022); Bilianos (2022); Perifanos and Goutsos (2021); Garí Soler and Apidianaki (2021)), Zenodo⁶⁹ (used by Dritsa et al. (2022); Fitsilis and Mikros (2021); Stamatatos et al. (2016)), Hugging Face⁷⁰ (used by Papaloukas et al. (2021); Zampieri et al. (2020)), or CLARIN:EL⁷¹ (used by Pontiki et al. (2020)). Consequently, only one out of eight datasets approx. is truly publicly available with access issues.

Figure 5 shows the availability of Greek LR over the years. The number of publicly available resources (in green) has increased in the last three years. Most often, at least one resource was shared as publicly available, but there were also years where no such resources were shared at all (2012, 2013, 2015, 2018). On the other hand, resources not providing any access information (black) exist consistently across the years. The number of resources with limited availability (orange), or ones that should, but could not be accessed (red), is relatively high, with the exception of 2019-2020.

Standardization of Annotations. Annotated datasets constitute the majority of the datasets created by researchers, as opposed to raw data. The annotation scheme used by researchers to annotate their data should adhere to standardized guidelines to facilitate methodological comparisons. In Syntax, Prokopidis and Papageorgiou (2017) developed the Greek Universal Dependencies (UD) treebank for dependency parsing. This is part of the UD project (Nivre et al. 2016) that offers standardized treebanks and provides consistent and unified annotation practices across languages. In GEC, Korre, Chatzipanagiotou, and Pavlopoulos (2021) established an annotation schema for the grammatical error types in Greek. For Named Entity Recognition (NER), Bartziokas, Mavropoulos, and Kotropoulos (2020) provided two annotated datasets, one with 4 label tags akin to the CONLL-2003 dataset (Sang and De Meulder 2003),

⁶⁹ <https://zenodo.org/>

⁷⁰ <https://huggingface.co/>

⁷¹ <https://inventory.clarin.gr/>

and the other incorporating 18 tags for entities, as in the OntoNotes 5 English dataset (Pradhan et al. 2007).

Multilingual nature of datasets. In terms of linguality (number of languages covered, i.e., mono- or multilingual), approximately 84% of the datasets are monolingual, while the remaining portion comprises bilingual or multilingual datasets. Only a small fraction (approx. 6%) are translations into Greek. Given that translations may not accurately represent the natural language as spoken by native speakers (Rogers, Gardner, and Augenstein 2023), this is a fortunate fact.

14.4 Language Resources in Greek

Table 17

Raw and annotated for various NLP tasks Greek datasets classified according to their availability (Yes: publicly available, Lmt: limited availability, Err: unavailable; tags are linkable; see Table 3 for details), annotation type (see Table 4 for details;† indicates unclear annotation process), size, size unit, and automatically-extracted meta-information.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	META-INFORMATION
Dritsa et al. (2022)	Yes	AUTOMATIC	1.28M	POLITICAL SPEECH	MEMBER NAME, SITTING DATE, PARLIAMENTARY PERIOD, PARLIAMENTARY SESSION, PARLIAMENTARY SITTING, POLITICAL PARTY, GOVERNMENT, MEMBER REGION, ROLES, MEMBER GENDER, SPEECH
Fitsilis and Mikros (2021)	Yes	AUTOMATIC	2,000	PARLIAMENTARY QUESTION	QUESTION TYPE, SUBJECT, PARLIAMENTARY PERIOD, PARLIAMENTARY SESSION, POLITICAL PARTY, SUBMITTER, MINISTERS, MINISTERS
Prokopidis and Piperidis (2020)	Yes	NO ANNOTATION	101,857	WEB PAGE	N/A
Barzokas, Papagiannopoulou, and Tsoumakas (2020)	Yes	CURATED	34.88M	TOKEN	LITERATURE TYPE, AUTHOR, PUB. YEAR, ISBN
Lopes et al. (2016)	Lmt	MANUAL	200	DIALOGUE	GENDER, TASK SUCCESS, ANGER, SATISFACTION, AND MISCOMMUNICATION
Lioudakis, Outsios, and Vazirgiannis (2019)	Err	CURATED†	8,005	ARTICLE	TOPIC
Iosif, Georgiladakis, and Potamianos (2016)	Err	NO ANNOTATION	66M	WEB DOCUMENT SNIPPET	N/A

The LR discussed so far include annotations for specific NLP tasks. Additionally, we identified corpora that provide raw text without any meta-information, as well as those with meta-information that can be used for various NLP tasks. Table 17 shows all these datasets in Greek, classified as regards their availability, annotation type, and describing any automatically-extracted meta-information included.

14.4.1 Greek datasets with no annotations. Datasets with no annotations are versatile resources that are potentially applicable to various NLP tasks beyond their original intended purposes. For instance, publicly available raw LR can facilitate pre-training purposes, e.g., through (masked) language modeling or so. Prokopidis and Piperidis (2020) created a dataset of 101,857 Open Content web-pages, comprising online archives of Greek newspapers from 2003 to 2020 and the Greek part of the w2c corpus (Majliš and Žabokrtský 2012), scrapped and pre-processed. Iosif, Georgiladakis, and Potamianos (2016) shared a dataset consisting of web document snippets in English, German, Italian, and Greek, with the Greek portion comprising 66M.

14.4.2 Greek Datasets for various NLP tasks. Fitsilis and Mikros (2021) assembled a corpus of 2,000 parliamentary questions from 2009 to 2019 while Dritsa et al. (2022) processed 1.28M political speeches

from Greek parliamentary records, spanning from July 1989 to July 2020. Both these datasets are publicly available and they comprise automatically-extracted metadata related to parliamentary procedures (e.g., parliamentary period, political party). Barzokas, Papagiannopoulou, and Tsoumakas (2020) generated a corpus of 34.88M tokens by processing e-books from Project Gutenberg,⁷² and Open Library.⁷³ Lopes et al. (2016) developed a dataset comprising audio recordings and transcripts of 200 dialogues from call-center interactions regarding movie inquiries, annotated with gender, task success, anger, satisfaction, and miscommunication. Additionally, Lioudakis, Outsios, and Vazirgiannis (2019) compiled a dataset sourced from the newspaper *Makedonia*, consisting of 8,005 articles annotated with their respective topics.

Table 18

Greek annotated datasets per NLP track. We sum the reported number of tokens, documents, or sentences and classify each track to support levels: Greek is low-supported in three and moderately/well in eight tracks.

TRACK	TOKENS	DOCUMENTS	SENTENCES	SUPPORT LEVEL
SA	-	330,919	19,579M	Well
Information Extraction (IE)	631,700	644	5,473	Well
Ethics and NLP	-	81	5,97M	Well
Machine Translation (MT)	-	302,617	700	Well
NLP Applications	-	56,319	-	Moderately
Authorship Analysis	885,899	1,618	-	Moderately
Semantics	-	-	1,332	Moderately
Summarization	-	1,612	-	Moderately
QA	-	200	200	Low
Syntax	-	-	-	Low
GEC	-	-	327	Low

14.4.3 Support per Track. In the context of NLP, well- and moderately-supported languages are defined based on the availability of linguistic resources and tools, which is often the result of research dedicated to processing and understanding these languages. Well-supported languages in NLP have extensive resources, including large annotated corpora, pre-trained models, and comprehensive lexicons that are often the result of robust community and research support. Moderately-supported languages in NLP have a reasonable amount of resources and tools, but these are less comprehensive and less mature compared to well-supported languages. In Table 18, we classify each NLP track based on how well is the Greek language supported, in terms of annotated datasets for that track, which can be used for training and/or evaluation purposes.

We find that Greek is low-supported in three tracks: QA, Syntax, and GEC. In eight tracks, Greek is either moderately (NLP applications, Authorship Analysis, Semantics, Summarization) or well-supported (IE, SA, MT, Ethics and NLP). Although not all of the moderately/well-supported datasets are publicly available, the majority is available and easily accessible, which moves Greek away from the resource-lean/scarse level for NLP tracks, an assumption that is not uncommon in literature (Giarelis, Mas-

⁷² <https://www.gutenberg.org/>

⁷³ <https://www.openbook.gr/>

trokostas, and Karacapilidis 2023; Papadopoulos, Papadakis, and Matsatsinis 2021). That is true except from the tracks of QA, Syntax, and GEC, where we highlight the need for more publicly available and easily/consistently accessible resources.

14.5 Greek Datasets and Data Leakage

In Table 19, we summarize the publicly-available datasets in Greek comprising human-generated annotations. These are datasets that can serve both training and evaluation purposes, which make them applicable to data leakage (i.e, models trained on the evaluation data) and contamination (i.e., models pre-trained on the evaluation data). Most of these datasets share the train/test split information, making such a leakage/contamination issue unlikely. In two, however, where the split is not known (Korre, Chatzipanagiotou, and Pavlopoulos 2021; Antonakaki et al. 2017; Prokopidis, Papavassiliou, and Piperidis 2016), leakage and contamination are very likely. Therefore, these two datasets should be treated with cautious, when used for evaluation purposes.

Table 19

Publicly-available Greek datasets for NLP tasks with human-generated annotations. We show whether a train/test split is defined (a dagger is added when only training are released).

AUTHORS	TASK	SPLIT
Papaloukas et al. (2021)	TOPIC CLASSIFICATION	YES
Korre, Chatzipanagiotou, and Pavlopoulos (2021)	GEC	NO
Bartziokas, Mavropoulos, and Kotropoulos (2020)	NER	YES†
Zampieri et al. (2020)	TOXICITY	YES
Antonakaki et al. (2017)	SA	NO
Stamatatos et al. (2016)	AUTHORSHIP	YES
Prokopidis, Papavassiliou, and Piperidis (2016)	MT	NO
Stamatatos et al. (2014)	AUTHORSHIP	YES
Juola and Stamatatos (2013)	AUTHORSHIP	YES

We exclude from this discussion datasets with no or automated annotations, because we consider these as invalid for proper evaluation. Although datasets with other availability are also excluded here, we note that leakage and contamination are applicable, in principle, also on those datasets.

15. Conclusions

This study highlights the importance of monolingual Natural Language Processing (NLP) surveys in advancing the field of NLP for specific languages. Monolingual surveys provide detailed insights into language-specific challenges, progress, and resources, making them one of the most comprehensive approaches for synthesizing and organizing existing knowledge. They are crucial for identifying and cataloging language-specific datasets and tools, addressing underrepresented languages, and capturing cultural and linguistic nuances essential for accurate NLP applications.

Our work is two-fold: it introduces a robust and systematic method for creating monolingual NLP surveys and applies this method to conduct an extensive survey of Greek NLP from 2012 to 2022. We identified trends in NLP thematic areas, highlighting which tasks are popular or overlooked, thus helping to direct future research efforts. Additionally, examining the methodological shift from traditional Machine

Learning (ML) to Deep Learning (DL) approaches provides insight into the evolution of techniques and the current state-of-the-art practices in Greek NLP.

Regarding the Language Resources (LRs) produced in the surveyed papers, we catalogued publicly available pre-trained Language Model (LM), which are essential for researchers to build and evaluate new models. We also catalogued datasets and lexical resources per NLP topic, including raw and annotated datasets for various NLP tasks. By classifying datasets by their availability and annotation type, we identified publicly available, machine-actionable datasets for specific NLP tasks, thus facilitating resource sharing and reuse. This classification also allows for assessing the support level of each NLP task for the Greek language, highlighting areas where resources are lacking and need development.

In conclusion, our method offers a robust and reliable approach to conducting monolingual NLP surveys, providing valuable insights and fostering the advancement of NLP technologies for a wide range of languages. Specifically, our survey of Greek NLP demonstrates the applicability and benefits of our method, contributing to the development of Greek NLP and serving as a model for other languages. By addressing the unique needs and challenges of specific languages, we contribute to making NLP advancements more inclusive and widely accessible.

Acknowledgment

This work has been partially supported by project MIS 5154714 of the National Recovery and Resilience Plan Greece 2.0 funded by the European Union under the NextGenerationEU Program.

References

- Achiam, Josh, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.
- Adamopoulou, Eleni and Lefteris Moussiades. 2020. Chatbots: History, technology, and applications. *Machine Learning with Applications*, 2:100006.
- Ahn, Hwijeon, Jimin Sun, Chan Young Park, and Jungyun Seo. 2020. Nlpdove at semeval-2020 task 12: Improving offensive language detection with cross-lingual transfer. *arXiv preprint arXiv:2008.01354*.
- Ahn, Jaimeen and Alice Oh. 2021. Mitigating language-dependent ethnic bias in bert. *arXiv preprint arXiv:2109.05704*.
- Al-Ayyoub, Mahmoud, Aya Nuseir, Kholoud Alsmearat, Yaser Jararweh, and Brij Gupta. 2018. Deep learning for arabic nlp: A survey. *Journal of computational science*, 26:522–531.
- Al-Ghuribi, Sumaia Mohammed and Shahrul Azman Mohd. Noah. 2021. A comprehensive overview of recommender system and sentiment analysis. *CoRR*, abs/2109.08794.
- Alam, Firoj, Arid Hasan, Tanvirul Alam, Akib Khan, Janntatul Tajrin, Naira Khan, and Shammur Absar Chowdhury. 2021. A review of bangla natural language processing tasks and the utility of transformer models. *arXiv preprint arXiv:2107.03844*.
- Alexandridis, Georgios, Konstantinos Korovesis, Iraklis Varlamis, Panagiotis Tsantilas, and George Caridakis. 2022. Emotion detection on greek social media using bidirectional encoder representations from transformers. In *25th Pan-Hellenic Conference on Informatics, PCI 2021*, page 28–32, Association for Computing Machinery, New York, NY, USA.
- Alexandridis, Georgios, Iraklis Varlamis, Konstantinos Korovesis, George Caridakis, and Panagiotis Tsantilas. 2021. A survey on sentiment analysis and opinion mining in greek social media. *Information*, 12(8).
- Angelidis, Iosif, Ilias Chalkidis, and Manolis Koubarakis. 2018. Named entity recognition, linking and generation for greek legislation. In *JURIX*, pages 1–10.
- Antonakaki, Despoina, Dimitris Spiliotopoulos, Christos V. Samaras, Sotiris Ioannidis, and Paraskevi Fragopoulou. 2016. Investigating the complete corpus of referendum and elections tweets. In *2016 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining (ASONAM)*, pages 100–105.
- Antonakaki, Despoina, Dimitris Spiliotopoulos, Christos V. Samaras, Polyvios Pratikakis, Sotiris Ioannidis, and Paraskevi Fragopoulou. 2017. Social media analysis during political turbulence. *PloS one*, 12(10):e0186836.

- Arcila-Calderón, Carlos, Javier J. Amores, Patricia Sánchez-Holgado, Lazaros Vrysis, Nikolaos Vryzas, and Martín Oller Alonso. 2022. How to detect online hate towards migrants and refugees? developing and evaluating a classifier of racist and xenophobic hate speech using shallow and deep learning. *Sustainability*, 14(20).
- Arnold, M.B. 1960. *Emotion and Personality: Psychological aspects*. Emotion and Personality. Columbia University Press.
- Artetxe, Mikel, Sebastian Ruder, and Dani Yogatama. 2019. On the cross-lingual transferability of monolingual representations. *CoRR*, abs/1910.11856.
- Athanasiou, Vasileios and Manolis Maragoudakis. 2017. A novel, gradient boosting framework for sentiment analysis in languages where nlp resources are not plentiful: A case study for modern greek. *Algorithms*, 10(1).
- Balloccu, Simone, Patrícia Schmidová, Mateusz Lango, and Ondrej Dusek. 2024. Leak, Cheat, Repeat: Data Contamination and Evaluation Malpractices in Closed-Source LLMs. In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 67–93, Association for Computational Linguistics, St. Julian's, Malta.
- Barbaresi, Adrien and Gaël Lejeune. 2020. Out-of-the-box and into the ditch? multilingual evaluation of generic text extraction tools. In *Proceedings of the 12th Web as Corpus Workshop*, pages 5–13, European Language Resources Association, Marseille, France.
- Bartziokas, Nikos, Thanassis Mavropoulos, and Constantine Kotropoulos. 2020. Datasets and performance metrics for greek named entity recognition. In *11th Hellenic Conference on Artificial Intelligence*, SETN 2020, page 160–167, Association for Computing Machinery, New York, NY, USA.
- Barzokas, Vasileios, Eirini Papagiannopoulou, and Grigorios Tsoumakas. 2020. Studying the evolution of greek words via word embeddings. In *11th Hellenic Conference on Artificial Intelligence*, SETN 2020, page 118–124, Association for Computing Machinery, New York, NY, USA.
- Beinborn, Lisa, Torsten Zesch, and Iryna Gurevych. 2013. Cognate production using character-based machine translation. In *Proceedings of the sixth international joint conference on natural language processing*, pages 883–891.
- Belevessis, Dimosthenis, Christos Tjortjis, Dimitris Psaradelis, and Dimitris Nikoglou. 2019. A hybrid method for sentiment analysis of election related tweets. In *2019 4th South-East Europe Design Automation, Computer Engineering, Computer Networks and Social Media Conference (SEEDA-CECNSM)*, pages 1–6.
- Belinkov, Yonatan, Sebastian Gehrmann, and Ellie Pavlick. 2020. Interpretability and analysis in neural nlp. In *Proceedings of the 58th annual meeting of the association for computational linguistics: tutorial abstracts*, pages 1–5.
- Bender, Emily. 2019. The# benderrule: On naming the languages we study and why it matters. *The Gradient*, 14.
- Bevendorff, Janek, Mara China-Ríos, Marc Franco-Salvador, Annina Heini, Erik Körner, Krzysztof Kredens, Maximilian Mayerl, Piotr Pęzik, Martin Potthast, Francisco Rangel, et al. 2023. Overview of pan 2023: Authorship verification, multi-author writing style analysis, profiling cryptocurrency influencers, and trigger detection. In *European Conference on Information Retrieval*, pages 518–526, Springer.
- Bilanos, Dimitris. 2022. Experiments in text classification: Analyzing the sentiment of electronic product reviews in greek. *Journal of Quantitative Linguistics*, 29(3):374–386.
- Bird, Steven. 2006. Nltk: the natural language toolkit. In *Proceedings of the COLING/ACL 2006 Interactive Presentation Sessions*, pages 69–72.
- Bojanowski, Piotr, Edouard Grave, Armand Joulin, and Tomas Mikolov. 2017. Enriching word vectors with subword information. *Transactions of the Association for Computational Linguistics*, 5:135–146.
- Bollegala, Danushka, Georgios Kontonatsios, and Sophia Ananiadou. 2015. A cross-lingual similarity measure for detecting biomedical term translations. *PloS one*, 10(6):e0126196.
- Bommasani, Rishi, Drew A Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S Bernstein, Jeannette Bohg, Antoine Bosselut, Emma Brunskill, et al. 2021. On the opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258*.
- Bommasani, Rishi, Percy Liang, and Tony Lee. 2023. Holistic Evaluation of Language Models. *Annals of the New York Academy of Sciences*.
- Boskou, Georgia, Efstathios Kirkos, and Charalambos Spathis. 2018. Assessing internal audit with text mining. *Journal of Information & Knowledge Management*, 17(02):1850020.
- Bovi, Claudio Delli, Jose Camacho-Collados, Alessandro Raganato, and Roberto Navigli. 2017. Eurosense: Automatic harvesting of multilingual sense annotations from parallel text. In *Proceedings of the 55th Annual Meeting of the Association for*

- Computational Linguistics (Volume 2: Short Papers)*, pages 594–600.
- Bowman, Samuel R. and George Dahl. 2021. What will it take to fix benchmarking in natural language understanding? In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4843–4855, Association for Computational Linguistics, Online.
- Bradley, Margaret M and Peter J Lang. 1999. Affective norms for english words (anew): Instruction manual and affective ratings. Technical report, Technical report C-1, the center for research in psychophysiology
- Braoudaki, Angela, Eleni Kanellou, Christos Kozanitis, and Panagiota Fatourou. 2020. Hybrid data driven and rule based sentiment analysis on greek text. *Procedia Computer Science*, 178:234–243. 9th International Young Scientists Conference in Computational Science, YSC2020, 05-12 September 2020.
- Braun, Daniel, Adrian Hernandez Mendez, Florian Matthes, and Manfred Langen. 2017. Evaluating natural language understanding services for conversational question answering systems. In *Proceedings of the 18th annual SIGdial meeting on discourse and dialogue*, pages 174–185.
- Brixtel, Romain, Gaël Lejeune, Antoine Doucet, and Nadine Lucas. 2013. Any language early detection of epidemic diseases from web news streams. In *2013 IEEE International Conference on Healthcare Informatics*, pages 159–168, IEEE.
- Brown, Tom, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Cabrio, Elena and Serena Villata. 2018. Five years of argument mining: A data-driven analysis. In *IJCAI*, volume 18, pages 5427–5433.
- Cambria, Erik, Soujanya Poria, Alexander Gelbukh, and Mike Thelwall. 2017. Sentiment analysis is a big suitcase. *IEEE Intelligent Systems*, 32(6):74–80.
- Castilho, Sheila, Joss Moorkens, Federico Gaspari, Rico Sennrich, Andy Way, and Panayota Georgakopoulou. 2018. Evaluating mt for massive open online courses: A multifaceted comparison between pbsmt and nmt systems. *Machine translation*, 32(3):255–278.
- Charalampakis, Basilis, Dimitris Spathis, Elias Kouslis, and Katia Kermanidis. 2015. Detecting irony on greek political tweets: A text mining approach. In *Proceedings of the 16th International Conference on Engineering Applications of Neural Networks (INNS)*, EANN '15, Association for Computing Machinery, New York, NY, USA.
- Charalampakis, Basilis, Dimitris Spathis, Elias Kouslis, and Katia Kermanidis. 2016. A comparison between semi-supervised and supervised text mining techniques on detecting irony in greek political tweets. *Engineering Applications of Artificial Intelligence*, 51:50–57. Mining the Humanities: Technologies and Applications.
- Chatzakou, Despoina, Athena Vakali, and Konstantinos Kafetsios. 2017. Detecting variation of emotions in online activities. *Expert Systems with Applications*, 89:318–332.
- Chatzipanagiotidis, Savvas, Maria Giagkou, and Detmar Meurers. 2021. Broad linguistic complexity analysis for greek readability classification. In *Proceedings of the 16th Workshop on Innovative Use of NLP for Building Educational Applications*, pages 48–58.
- Chauhan, Priyavrat, Nonita Sharma, and Geeta Sikka. 2021. The emergence of social media data and sentiment analysis in election prediction. *Journal of Ambient Intelligence and Humanized Computing*, 12:2601–2627.
- Chen, Danqi and Wen-tau Yih. 2020. Open-domain question answering. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: Tutorial Abstracts*, pages 34–37, Association for Computational Linguistics, Online.
- Chen, Yanqing and Steven Skiena. 2014. Building sentiment lexicons for all major languages. In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 383–389.
- Chen, Zeming and Qiyue Gao. 2022. Curriculum: A broad-coverage benchmark for linguistic phenomena in natural language understanding. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3204–3219, Association for Computational Linguistics, Seattle, United States.
- Chowdhury, Shammur Absar, Arindam Ghosh, Evgeny A Stepanov, Ali Orkan Bayer, Giuseppe Riccardi, Ioannis Klasinas, et al. 2014. Cross-language transfer of semantic annotation via targeted crowdsourcing. In *INTERSPEECH*, pages 2108–2112.
- Conneau, Alexis, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Unsupervised cross-lingual representation learning at scale. *arXiv preprint arXiv:1911.02116*.

- Conneau, Alexis, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Édouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. Unsupervised cross-lingual representation learning at scale. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451.
- Conneau, Alexis, Ruty Rinott, Guillaume Lample, Adina Williams, Samuel R. Bowman, Holger Schwenk, and Veselin Stoyanov. 2018. Xnli: Evaluating cross-lingual sentence representations. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, Association for Computational Linguistics.
- Cruse, D Alan. 1986. *Lexical semantics*. Cambridge university press.
- Crystal, David. 2011. *A dictionary of linguistics and phonetics*. John Wiley & Sons.
- Dabre, Raj, Chenhui Chu, and Anoop Kunchukuttan. 2020. A survey of multilingual neural machine translation. *ACM Computing Surveys (CSUR)*, 53(5):1–38.
- Dai, Andrew M and Quoc V Le. 2015. Semi-supervised sequence learning. *Advances in neural information processing systems*, 28.
- Darwish, Kareem, Nizar Habash, Mourad Abbas, Hend Al-Khalifa, Huseein T Al-Natsheh, Houda Bouamor, Karim Bouzoubaa, Violetta Cavalli-Sforza, Samhaa R El-Beltagy, Wassim El-Hajj, et al. 2021. A panoramic survey of natural language processing in the arab world. *Communications of the ACM*, 64(4):72–81.
- Das, Debarati, Bhaskarjyoti Das, and Kavi Mahesh. 2016. A computational analysis of mahabharata. In *Proceedings of the 13th International Conference on Natural Language Processing*, pages 219–228.
- de Barcelos Silva, Allan, Marcio Miguel Gomes, Cristiano André da Costa, Rodrigo da Rosa Righi, Jorge Luis Victoria Barbosa, Gustavo Pessin, Geert De Doncker, and Gustavo Federizzi. 2020. Intelligent personal assistants: A systematic literature review. *Expert Systems with Applications*, 147:113193.
- De Bruyn, Maxime, Ehsan Lotfi, Jeska Buhmann, and Walter Daelemans. 2021. MFAQ: a multilingual FAQ dataset. In *Proceedings of the 3rd Workshop on Machine Reading for Question Answering*, pages 1–13, Association for Computational Linguistics, Punta Cana, Dominican Republic.
- Desai, Nikita P and Vipul K Dabhi. 2021. Taxonomic survey of Hindi Language NLP systems. *arXiv preprint arXiv:2102.00214*.
- Devlin, Jacob, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Association for Computational Linguistics, Minneapolis, Minnesota.
- Di Carlo, Valerio, Federico Bianchi, and Matteo Palmonari. 2019. Training temporal word embeddings with a compass. In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pages 6326–6334.
- Díaz, Mark, Razvan Amironesei, Laura Weidinger, and Iason Gabriel. 2022. Accounting for offensive speech as a practice of resistance. In *Proceedings of the Sixth Workshop on Online Abuse and Harms (WOAH)*, pages 192–202.
- Dong, Li, Nan Yang, Wenhui Wang, Furu Wei, Xiaodong Liu, Yu Wang, Jianfeng Gao, Ming Zhou, and Hsiao-Wuen Hon. 2019. Unified language model pre-training for natural language understanding and generation. *Advances in neural information processing systems*, 32.
- Dozat, Timothy and Christopher D Manning. 2016. Deep biaffine attention for neural dependency parsing. *arXiv preprint arXiv:1611.01734*.
- Drakopoulos, Georgios, Ioanna Giannoukou, Phivos Mylonas, and Spyros Sioutas. 2020. A graph neural network for assessing the affective coherence of twitter graphs. In *2020 IEEE International Conference on Big Data (Big Data)*, pages 3618–3627.
- Dritsa, Konstantina, Aikaterini Thoma, Ioannis Pavlopoulos, and Panos Louridas. 2022. A greek parliament proceedings dataset for computational linguistics and political analysis. *Advances in Neural Information Processing Systems*, 35:28874–28888.
- Ekman, Paul. 1982. What emotion categories or dimensions can observers judge from facial behavior? *Emotions in the human face*, pages 39–55.
- El, Sara El Manar and Ismail Kassou. 2014. Authorship analysis studies: A survey. *International Journal of Computer Applications*, 86(12).
- El-Haj, Mahmoud, Paul Rayson, and Nadhem Zmandar. 2022. *Proceedings of the 4th Financial Narrative Processing Workshop (FNP 2022)*, volume 13. European Language Resources Association (ELRA).
- El-Haj, Mahmoud, Nadhem Zmandar, Paul Rayson, Ahmed AbuRa’ed, Marina Litvak, Nikiforos Pittaras, George Giannakopoulos, Aris Kosmopoulos, Blanca Carbajo-Coronado, and Antonio Moreno-Sandoval.

2022. The financial narrative summarisation shared task (FNS 2022). In *Proceedings of the 4th Financial Narrative Processing Workshop @LREC2022*, pages 43–52, European Language Resources Association, Marseille, France.
- Elman, Jeffrey L. 1990. Finding structure in time. *Cognitive science*, 14(2):179–211.
- Evdaïmon, Iakovos, Hadi Abdine, Christos Xypolopoulos, Stamatis Outsios, Michalis Vazirgiannis, and Giorgos Stamou. 2023. Greekbart: The first pretrained greek sequence-to-sequence model. *arXiv preprint arXiv:2304.00869*.
- Finkelstein, Lev, Evgeniy Gabrilovich, Yossi Matias, Ehud Rivlin, Zach Solan, Gadi Wolfman, and Eytan Ruppin. 2001. Placing search in context: The concept revisited. In *Proceedings of the 10th international conference on World Wide Web*, pages 406–414.
- Fitsilis, Fotios and George Mikros. 2021. Development and validation of a corpus of written parliamentary questions in the hellenic parliament. *Journal of Open Humanities Data*, 7.
- Florou, Eirini, Konstantinos Perifanos, and Dionysis Goutsos. 2018. Neural embeddings for metaphor detection in a corpus of greek texts. In *2018 9th International Conference on Information, Intelligence, Systems and Applications (IISA)*, pages 1–4.
- Fragkou, Pavlina. 2014. Text segmentation for language identification in greek forums. *Procedia-Social and Behavioral Sciences*, 147:160–166.
- Gakis, Panagiotis, Christos Panagiotakopoulos, Kyriakos Sgarbas, and Christos Tsalidis. 2012. Design and implementation of an electronic lexicon for Modern Greek. *Literary and Linguistic Computing*, 27(2):155–169.
- Gakis, Panagiotis, Christos Panagiotakopoulos, Kyriakos Sgarbas, and Christos Tsalidis. 2015. Analysis of lexical ambiguity in modern greek using a computational lexicon. *Digital Scholarship in the Humanities*, 30(1):20–38.
- Gakis, Panagiotis, Christos Panagiotakopoulos, Kyriakos Sgarbas, Christos Tsalidis, and Vassilios Verykios. 2016. Design and construction of the Greek grammar checker. *Digital Scholarship in the Humanities*, 32(3):554–576.
- Gamallo, Pablo, José Ramon Pichel, and Iñaki Alegria. 2020. Measuring language distance of isolated european languages. *Information*, 11(4):181.
- Ganitkevitch, Juri and Chris Callison-Burch. 2014. The multilingual paraphrase database. In *LREC*, pages 4276–4283, Citeseer.
- Ganitkevitch, Juri, Benjamin Van Durme, and Chris Callison-Burch. 2013. Ppdb: The paraphrase database. In *Proceedings of the 2013 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 758–764.
- Gardner, Matt, Jonathan Berant, Hannaneh Hajishirzi, Alon Talmor, and Sewon Min. 2019. Question answering is a format; when is it useful? *CoRR*, abs/1909.11291.
- Gari Soler, Aina and Marianna Apidianaki. 2021. Let's play mono-poly: Bert can reveal words' polysemy level and partitionability into senses. *Transactions of the Association for Computational Linguistics*, 9:825–844.
- Garofalakis, John, Konstantinos Plessas, and Athanasios Plessas. 2016. A semi-automatic system for the consolidation of greek legislative texts. In *Proceedings of the 20th Pan-Hellenic Conference on Informatics, PCI '16*, Association for Computing Machinery, New York, NY, USA.
- Gavriilidou, Maria, Maria Koutsombogera, Anastasios Patrikakos, and Stelios Piperidis. 2012. *The Greek Language in the Digital Age*. META-NET White Paper Series. Georg Rehm and Hans Uszkoreit (Series Editors). Springer.
- Giannakopoulos, George. 2013. Multi-document multilingual summarization and evaluation tracks in acl 2013 multiling workshop. In *Proceedings of the multiling 2013 workshop on multilingual multi-document summarization*, pages 20–28.
- Giarelis, Nikolaos, Charalampos Mastrokostas, and Nikos Karacapilidis. 2023. Greekt5: A series of greek sequence-to-sequence models for news summarization. *arXiv preprint arXiv:2311.07767*.
- Giarelis, Nikolaos, Charalampos Mastrokostas, and Nikos Karacapilidis. 2024. Greekt5: Sequence-to-sequence models for greek news summarization. In *IFIP International Conference on Artificial Intelligence Applications and Innovations*, pages 60–73, Springer.
- Giatsoglou, Maria, Manolis G. Vozalis, Konstantinos Diamantaras, Athena Vakali, George Sarigiannidis, and Konstantinos Ch. Chatzisavvas. 2017. Sentiment analysis leveraging emotions and word embeddings. *Expert Systems with Applications*, 69:214–224.
- Giorgi, Ioanna, Bruno Golosio, Massimo Esposito, Angelo Cangelosi, and Giovanni L. Masala. 2021. Modeling multiple language learning in a developmental cognitive architecture. *IEEE Transactions on Cognitive and Developmental Systems*, 13(4):922–933.
- Giouli, Voula, Vera Pilitsidou, and Hephæstion Christopoulos. 2020. Greek within the global FrameNet initiative: Challenges and conclusions so far. In *Proceedings of the International FrameNet*

- Workshop 2020: Towards a Global, Multilingual FrameNet*, pages 48–55, European Language Resources Association, Marseille, France.
- Goddard, Cliff. 2011. *Semantic analysis: A practical introduction*. Oxford University Press, USA.
- Gonen, Hila, Ganesh Jawahar, Djamé Seddah, and Yoav Goldberg. 2020a. Simple, interpretable and stable method for detecting words with usage change across corpora. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 538–555, Association for Computational Linguistics, Online.
- Gonen, Hila, Shauli Ravfogel, Yanai Elazar, and Yoav Goldberg. 2020b. It's not greek to mbert: Inducing word-level translations from multilingual BERT. *CoRR*, abs/2010.08275.
- Gonzalez-Dios, Itziar and Begoña Altuna. 2022. Natural Language Processing and Language Technologies for the Basque Language. *Cuadernos Europeos de Deusto*, pages 203–230.
- Goodwin, Travis R and Sanda M Harabagiu. 2016. Medical question answering for clinical decision support. In *Proceedings of the 25th ACM international on conference on information and knowledge management*, pages 297–306.
- Gordon, Mitchell L, Michelle S Lam, Joon Sung Park, Kayur Patel, Jeff Hancock, Tatsunori Hashimoto, and Michael S Bernstein. 2022. Jury learning: Integrating dissenting voices into machine learning models. In *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems*, pages 1–19.
- Guellil, Imane, Houda Saâdane, Faical Azouaou, Billel Gueni, and Damien Nouvel. 2021. Arabic natural language processing: An overview. *Journal of King Saud University-Computer and Information Sciences*, 33(5):497–507.
- Haddow, Barry, Rachel Bawden, Antonio Valerio Miceli Barone, Jindřich Helcl, and Alexandra Birch. 2022. Survey of low-resource machine translation. *Computational Linguistics*, 48(3):673–732.
- Halvani, Oren, Lukas Graner, and Roey Regev. 2020. Taveer: an interpretable topic-agnostic authorship verification method. In *Proceedings of the 15th International Conference on Availability, Reliability and Security*, pages 1–10.
- Halvani, Oren, Christian Winter, and Anika Pflug. 2016. Authorship verification for different languages, genres and topics. *Digital Investigation*, 16:S33–S43.
- Ham, Jiyeon, Yo Joong Choe, Kyubyong Park, Ilji Choi, and Hyungjoon Soh. 2020. Kornli and korsts: New benchmark datasets for korean natural language understanding. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 422–430.
- Hämäläinen, Mika and Khalid Alnajjar. 2021. The Current State of Finnish NLP. In *Proceedings of the Seventh International Workshop on Computational Linguistics of Uralic Languages*, pages 65–72.
- Hamilton, William L, Jure Leskovec, and Dan Jurafsky. 2016a. Cultural shift or linguistic drift? comparing two computational measures of semantic change. In *Proceedings of the conference on empirical methods in natural language processing. Conference on empirical methods in natural language processing*, volume 2016, page 2116, NIH Public Access.
- Hamilton, William L, Jure Leskovec, and Dan Jurafsky. 2016b. Diachronic word embeddings reveal statistical laws of semantic change. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1489–1501.
- Harris, Zellig S. 1954. Distributional structure. *Word*, 10(2-3):146–162.
- Hemphill, Charles T., John J. Godfrey, and George R. Doddington. 1990. The ATIS spoken language systems pilot corpus. In *Speech and Natural Language: Proceedings of a Workshop Held at Hidden Valley, Pennsylvania, June 24-27, 1990*.
- Holtzman, Ari, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. 2019. The curious case of neural text degeneration. *arXiv preprint arXiv:1904.09751*.
- Honnibal, Matthew and Ines Montani. 2017. spacy 2: Natural language understanding with bloom embeddings, convolutional neural networks and incremental parsing. *To appear*, 7(1):411–420.
- Hovy, Dirk, Shannon L Spruit, Margaret Mitchell, Emily M Bender, Michael Strube, and Hanna Wallach. 2017. Proceedings of the first acl workshop on ethics in natural language processing. In *Proceedings of the First ACL Workshop on Ethics in Natural Language Processing*.
- Hovy, Dirk and Diyi Yang. 2021. The importance of modeling social factors of language: Theory and practice. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 588–602.
- Howard, Jeremy and Sebastian Ruder. 2018. Universal language model fine-tuning for text classification. *arXiv preprint arXiv:1801.06146*.
- Hua, Yiqing, Cristian Danescu-Niculescu-Mizil, Dario Taraborelli, Nithum Thain, Jeffery Sorensen, and Lucas Dixon. 2018. WikiConv: A corpus of the complete conversational history of a large online collaborative community. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2818–2823, Association

- for Computational Linguistics, Brussels, Belgium.
- Hürlimann, Manuela, Benno Weck, Esther van den Berg, Simon Suster, and Malvina Nissim. 2015. Glad: Groningen lightweight authorship detection. In *CLEF (working notes)*, Toulouse.
- Hutchins, John. 1997. From first conception to first demonstration: the nascent years of machine translation, 1947–1954. a chronology. *Machine Translation*, 12:195–252.
- Iosif, Elias, Spiros Georgiladakis, and Alexandros Potamianos. 2016. Cognitively motivated distributional representations of meaning. In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC'16)*, pages 1226–1232, European Language Resources Association (ELRA), Portorož, Slovenia.
- Ji, Ziwei, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Ye Jin Bang, Andrea Madotto, and Pascale Fung. 2023. Survey of hallucination in natural language generation. *ACM Computing Surveys*, 55(12):1–38.
- Juola, Patrick, George K Mikros, and Sean Vinsick. 2019. A comparative assessment of the difficulty of authorship attribution in greek and in english. *Journal of the Association for Information Science and Technology*, 70(1):61–70.
- Juola, Patrick and Efstathios Stamatatos. 2013. Overview of the author identification task at pan 2013. *CLEF (Working Notes)*, 1179.
- Kafetsios, Konstantinos and John B Nezelek. 2012. Emotion and support perceptions in everyday social interaction: Testing the “less is more” hypothesis in two cultures. *Journal of Social and Personal Relationships*, 29(2):165–184.
- Kahneman, Daniel. 2013. Thinking, fast and slow. *New York: Farrar, Straus and Giroux*, 499.
- Kamath, Aishwarya and Rajarshi Das. 2018. A survey on semantic parsing. *arXiv preprint arXiv:1812.00978*.
- Kapoteli, Evridiki, Paraskevas Koukaras, and Christos Tjortjis. 2022. Social media sentiment analysis related to covid-19 vaccines: Case studies in english and greek language. In *Artificial Intelligence Applications and Innovations*, pages 360–372, Springer International Publishing, Cham.
- Kavros, Antrei and Yannis Tzitzikas. 2022. Soundexgr: An algorithm for phonetic matching for the greek language. *Natural Language Engineering*, pages 1–36.
- Kestemont, Mike, Enrique Manjavacas, Ilia Markov, Janek Bevendorff, Matti Wiegmann, Efstathios Stamatatos, Martin Potthast, and Benno Stein. 2020. Overview of the cross-domain authorship verification task at pan 2020. In *Working notes of CLEF 2020-Conference and Labs of the Evaluation Forum*, 22-25 September, Thessaloniki, Greece, pages 1–14.
- Kestemont, Mike, Michael Tschuggnall, Efstathios Stamatatos, Walter Daelemans, Günther Specht, Benno Stein, and Martin Potthast. 2018. Overview of the author identification task at pan-2018: cross-domain authorship attribution and style change detection. In *Working Notes Papers of the CLEF 2018 Evaluation Labs. Avignon, France, September 10-14, 2018/Cappellato, Linda [edit.]; et al.*, pages 1–25.
- Khurana, Diksha, Aditya Koli, Kiran Khatter, and Sukhdev Singh. 2023. Natural language processing: State of the art, current trends and challenges. *Multimedia tools and applications*, 82(3):3713–3744.
- Kiss, Tibor and Jan Strunk. 2006. Unsupervised multilingual sentence boundary detection. *Computational linguistics*, 32(4):485–525.
- Kocher, Mirco and Jacques Savoy. 2017. A simple and efficient algorithm for authorship verification. *Journal of the Association for Information Science and Technology*, 68(1):259–269.
- Koehn, Philipp, Hieu Hoang, Alexandra Birch, Chris Callison-Burch, Marcello Federico, Nicola Bertoldi, Brooke Cowan, Wade Shen, Christine Moran, Richard Zens, et al. 2007. Moses: Open source toolkit for statistical machine translation. In *Proceedings of the 45th annual meeting of the association for computational linguistics companion volume proceedings of the demo and poster sessions*, pages 177–180.
- Korre, Katerina, Marita Chatzipanagiotou, and John Pavlopoulos. 2021. Elerrant: Automatic grammatical error type classification for greek. In *Proceedings of the International Conference on Recent Advances in Natural Language Processing (RANLP 2021)*, pages 708–717.
- Kouremenos, Dimitrios, Klimis Ntalianis, and Stefanos Kollias. 2018. A novel rule based machine translation scheme from greek to greek sign language: Production of different types of large corpora and language models evaluation. *Computer Speech & Language*, 51:110–135.
- Koutsikakis, John, Ilias Chalkidis, Prodromos Malakasiotis, and Ion Androutsopoulos. 2020. Greek-bert: The greeks visiting sesame street. In *11th Hellenic Conference on Artificial Intelligence, SETN 2020*, page 110–117, Association for Computing Machinery, New York, NY, USA.
- Krasadakis, Panteleimon, Evangelos Sakkopoulos, and Vassilios S. Verykios. 2022. A natural language processing survey on legislative and greek documents. In *25th Pan-Hellenic Conference on Informatics, PCI 2021*, page 407–412, Association

- for Computing Machinery, New York, NY, USA.
- Küçük, Dilek and Fazli Can. 2020. Stance detection: A survey. *ACM Computing Surveys (CSUR)*, 53(1):1–37.
- Kydros, Dimitrios, Maria Argyropoulou, and Vasiliki Vrana. 2021. A content and sentiment analysis of greek tweets during the pandemic. *Sustainability*, 13(11):6150.
- Lachana, Zoi, Michalis Avgerinos Loutsaris, Charalampos Alexopoulos, and Yannis Charalabidis. 2020. Automated analysis and interrelation of legal elements based on text mining. *International Journal of E-Services and Mobile Applications (IJESMA)*, 12(2):79–96.
- Lafferty, John D, Andrew McCallum, and Fernando CN Pereira. 2001. Conditional random fields: Probabilistic models for segmenting and labeling sequence data. In *Proceedings of the Eighteenth International Conference on Machine Learning*, pages 282–289.
- Larabi Marie-Sainte, Souad, Nada Alalyani, Sihaam Alotaibi, Sanaa Ghouzali, and Ibrahim Abunadi. 2019. Arabic natural language processing and machine learning-based systems. *IEEE Access*, 7:7011–7020.
- Lawrence, John and Chris Reed. 2020. Argument mining: A survey. *Computational Linguistics*, 45(4):765–818.
- Lejeune, Gaël, Romain Brixte, Antoine Doucet, and Nadine Lucas. 2012. Daniel: Language independent character-based news surveillance. In *International Conference on NLP*, pages 64–75, Springer.
- Lejeune, Gaël, Romain Brixte, Antoine Doucet, and Nadine Lucas. 2015. Multilingual event extraction for epidemic detection. *Artificial intelligence in medicine*, 65(2):131–143.
- Lekea, Ioanna K and Panagiotis Karampelas. 2018. Detecting hate speech within the terrorist argument: a greek case. In *2018 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining (ASONAM)*, pages 1084–1091, IEEE.
- Lenci, Alessandro, Magnus Sahlgren, Patrick Jeuniaux, Amaru Cuba Gyllensten, and Martina Miliani. 2022. A comparative evaluation and analysis of three generations of distributional semantic models. *Language resources and evaluation*, 56(4):1269–1313.
- Lewis, Mike, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Ves Stoyanov, and Luke Zettlemoyer. 2019. Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. *arXiv preprint arXiv:1910.13461*.
- Lewis, Mike, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, Association for Computational Linguistics, Online.
- Li, Junhui, Muhua Zhu, Wei Lu, and Guodong Zhou. 2015. Improving semantic parsing with enriched synchronous context-free grammar. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 1455–1465.
- Li, Lei, Corina Forăscu, Mahmoud El-Haj, and George Giannakopoulos. 2013. Multi-document multilingual summarization corpus preparation, part 1: Arabic, english, greek, chinese, romanian. In *Proceedings of the multiling 2013 workshop on multilingual multi-document summarization*, pages 1–12.
- Li, Yang, Qingliang Miao, Ji Geng, Christoph Alt, Robert Schwarzenberg, Leonhard Hennig, Changjian Hu, and Feiyu Xu. 2018. Question answering for technical customer support. In *Natural Language Processing and Chinese Computing: 7th CCF International Conference, NLPCC 2018, Hohhot, China, August 26–30, 2018, Proceedings, Part I* 7, pages 3–15, Springer.
- Lioudakis, Michalis, Stamatis Outsios, and Michalis Vazirgiannis. 2019. An ensemble method for producing word representations for the greek language. *CoRR*, abs/1912.04965.
- Liu, Bing. 2020. *Sentiment analysis: Mining opinions, sentiments, and emotions*. Cambridge university press.
- Liu, Yinhan, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: a robustly optimized bert pretraining approach (2019). *arXiv preprint arXiv:1907.11692*, 364.
- Liu, Zhiyuan, Chuanzheng Sun, Yuxin Jiang, Shiqi Jiang, and Mei Ming. 2021. Multi-modal application: Image memes generation. *arXiv preprint arXiv:2112.01651*.
- Lopes, José, Arodami Chorianopoulou, Elisavet Palogiannidi, Helena Moniz, Alberto Abad, Katerina Louka, Elias Iosif, and Alexandros Potamianos. 2016. The SpeDial datasets: datasets for spoken dialogue systems analytics. In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC’16)*, pages 104–110, European Language Resources Association (ELRA), Portorož, Slovenia.

- Lu, Jiasen, Christopher Clark, Rowan Zellers, Roozbeh Mottaghi, and Aniruddha Kembhavi. 2022. Unified-io: A unified model for vision, language, and multi-modal tasks. *arXiv preprint arXiv:2206.08916*.
- Majliš, Martin and Zdeněk Žabokrtský. 2012. Language richness of the web. In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC'12)*, pages 2927–2934.
- Makrynioti, Nantia and Vasilis Vassalos. 2015. Sentiment extraction from tweets: Multilingual challenges. In *Big Data Analytics and Knowledge Discovery*, pages 136–148, Springer International Publishing, Cham.
- Malamas, Nikolaos, Konstantinos Papangelou, and Andreas L. Symeonidis. 2022. Upon improving the performance of localized healthcare virtual assistants. *Healthcare*, 10(1):99.
- Manias, George, Argyro Mavrogiorgou, Athanasios Kiourtis, and Dimosthenis Kyriazis. 2020. An evaluation of neural machine translation and pre-trained word embeddings in multilingual neural sentiment analysis. In *2020 IEEE International Conference on Progress in Informatics and Computing (PIC)*, pages 274–283.
- Manning, Christopher D. 2015. Last words: Computational linguistics and deep learning. *Computational Linguistics*, 41(4):701–707.
- Marakakis, Emmanouil, Haridimos Kondylakis, and Papakonstantinou Aris. 2017. Apantisis: A greek question-answering system for knowledge-base exploration. In *Strategic Innovative Marketing*, pages 501–510, Springer International Publishing, Cham.
- Markopoulos, George, George Mikros, Anastasia Iliadi, and Michalis Lontos. 2015. Sentiment analysis of hotel reviews in greek: A comparison of unigram features. In *Cultural Tourism in a Digital Era*, pages 373–383, Springer International Publishing, Cham.
- Maynez, Joshua, Shashi Narayan, Bernd Bohnet, and Ryan McDonald. 2020. On faithfulness and factuality in abstractive summarization. *arXiv preprint arXiv:2005.00661*.
- Medrouk, Lisa and Anna Pappa. 2017. Deep learning model for sentiment analysis in multi-lingual corpus. In *Neural Information Processing*, pages 205–212, Springer International Publishing, Cham.
- Medrouk, Lisa and Anna Pappa. 2018. Do deep networks really need complex modules for multilingual sentiment polarity detection and domain classification? In *2018 International Joint Conference on Neural Networks (IJCNN)*, pages 1–6.
- Mikolov, Tomas, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013a. Efficient estimation of word representations in vector space. *arXiv preprint arXiv:1301.3781*.
- Mikolov, Tomas, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. 2013b. Distributed representations of words and phrases and their compositionality. *Advances in neural information processing systems*, 26.
- Mikros, George K. 2012. Authorship attribution and gender identification in greek blogs. *Methods and Applications of Quantitative Linguistics*, 21:21–32.
- Mikros, George K. 2013. Systematic stylometric differences in men and women authors: a corpus-based study. *Issues in quantitative linguistics*, 3:206–223.
- Mohammad, Saif, Svetlana Kiritchenko, Parinaz Sobhani, Xiaodan Zhu, and Colin Cherry. 2016. Semeval-2016 task 6: Detecting stance in tweets. In *Proceedings of the 10th international workshop on semantic evaluation (SemEval-2016)*, pages 31–41.
- Mountantonakis, Michalis, Michalis Bastakis, Loukas Mertzanis, and Yannis Tzitzikas. 2022. Tiresias: Bilingual question answering over dbpedia. In *Workshop at ISWC*.
- Mouratidis, Despoina and Katia Lida Kermanidis. 2019. Ensemble and deep learning for language-independent automatic selection of parallel data. *Algorithms*, 12(1):26.
- Mouratidis, Despoina, Katia Lida Kermanidis, and Vilemini Sosoni. 2020. Innovative deep neural network fusion for pairwise translation evaluation. In *Artificial Intelligence Applications and Innovations: 16th IFIP WG 12.5 International Conference, AIAI 2020, Neos Marmaras, Greece, June 5–7, 2020, Proceedings, Part II 16*, pages 76–87, Springer.
- Mouratidis, Despoina, Katia Lida Kermanidis, and Vilemini Sosoni. 2021. Innovatively fused deep learning with limited noisy data for evaluating translations from poor into rich morphology. *Applied Sciences*, 11(2):639.
- Mouratidis, Despoina, Eirini Mathe, Yorghos Voutos, Klio Stamou, Katia Lida Kermanidis, Phivos Mylonas, and Andreas Kanavos. 2022. Domain-specific term extraction: A case study on greek maritime legal texts. In *Proceedings of the 12th Hellenic Conference on Artificial Intelligence, SETN '22*, Association for Computing Machinery, New York, NY, USA.
- Mudinas, Andrius, Dell Zhang, and Mark Levene. 2019. Market trend prediction using sentiment analysis: lessons learned and paths forward. *arXiv preprint arXiv:1903.05440*.
- Navigli, Roberto and Simone Paolo Ponzetto. 2012. Babelnet: The automatic construction, evaluation and application of a wide-coverage multilingual

- semantic network. *Artificial intelligence*, 193:217–250.
- Nie, Yixin, Adina Williams, Emily Dinan, Mohit Bansal, Jason Weston, and Douwe Kiela. 2019. Adversarial nli: A new benchmark for natural language understanding. *arXiv preprint arXiv:1910.14599*.
- Nikiforos, Maria Nefeli, Yorghos Voutos, Anthi Drougani, Phivos Mylonas, and Katia Lida Kermanidis. 2021. The modern greek language on the social web: A survey of data sets and mining applications. *Data*, 6:52.
- Nikiforos, Stefanos, Spyros Tzanavaris, and Katia-Lida Kermanidis. 2020. Virtual learning communities (vlcs) rethinking: influence on behavior modification—bullying detection through machine learning and natural language processing. *Journal of Computers in Education*, 7:531–551.
- Nikolaev, Dmitry and Sebastian Padó. 2023. The universe of utterances according to bert. In *Proceedings of the 15th International Conference on Computational Semantics*, pages 99–105.
- Nivre, Joakim, Marie-Catherine De Marneffe, Filip Ginter, Yoav Goldberg, Jan Hajic, Christopher D Manning, Ryan McDonald, Slav Petrov, Sampo Pyysalo, Natalia Silveira, et al. 2016. Universal dependencies v1: A multilingual treebank collection. In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC'16)*, pages 1659–1666.
- Oflazer, Kemal. 2014. Turkish and its challenges for language processing. *Language resources and evaluation*, 48:639–653.
- OpenAI. 2023. Gpt-4 technical report.
- Outsios, Stamatis, Christos Karatsalos, Konstantinos Skianis, and Michalis Vazirgiannis. 2020. Evaluation of Greek word embeddings. In *Proceedings of the Twelfth Language Resources and Evaluation Conference*, pages 2543–2551, European Language Resources Association, Marseille, France.
- Outsios, Stamatis, Konstantinos Skianis, Polykarpos Meladianos, Christos Xypolopoulos, and Michalis Vazirgiannis. 2018. Word embeddings from large-scale greek web content. *arXiv preprint arXiv:1810.06694*.
- Padó, Dmitry Nikolaev Sebastian. 2023. Investigating semantic subspaces of transformer sentence embeddings through linear structural probing. *EMNLP 2023*, page 142.
- Palogiannidi, E., E. Losif, P. Koutsakis, and A. Potamianos. 2015. Valence, arousal and dominance estimation for english, german, greek, portuguese and spanish lexica using semantic models. In *INTERSPEECH 2015*, pages 1527–1531.
- Palogiannidi, Elisavet, Polychronis Koutsakis, Elias Iosif, and Alexandros Potamianos. 2016. Affective lexicon creation for the Greek language. In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC'16)*, pages 2867–2872, European Language Resources Association (ELRA), Portorož, Slovenia.
- Pang, Bo, Lillian Lee, and Shivakumar Vaithyanathan. 2002. Thumbs up? sentiment classification using machine learning techniques. *CoRR*, cs.CL/0205070.
- Papadopoulos, Dimitris, Nikolaos Papadakis, and Nikolaos F Matsatsinis. 2021. PENELOPIE: enabling open information extraction for the greek language through machine translation. *CoRR*, abs/2103.15075.
- Papaioannou, Jens-Michalis, Paul Grundmann, Betty van Aken, Athanasios Samaras, Ilias Kyparissidis, George Giannakoulas, Felix Gers, and Alexander Loeser. 2022. Cross-lingual knowledge transfer for clinical phenotyping. In *Proceedings of the Thirteenth Language Resources and Evaluation Conference*, pages 900–909, European Language Resources Association, Marseille, France.
- Papaloukas, Christos, Ilias Chalkidis, Konstantinos Athinaios, Despina Pantazi, and Manolis Koubarakis. 2021. Multi-granular legal topic classification on Greek legislation. In *Proceedings of the Natural Legal Language Processing Workshop 2021*, pages 63–75, Association for Computational Linguistics, Punta Cana, Dominican Republic.
- Papantoniou, Katerina, Vasilis Efthymiou, and Giorgos Flouris. 2021. El-nel: Entity linking for greek news articles. In *ISWC (Posters/Demos/Industry)*.
- Papantoniou, Katerina and Yannis Tzitzikas. 2020. NLP for the Greek language: a brief survey. In *11th Hellenic Conference on Artificial Intelligence*, pages 101–109.
- Paraskevopoulos, Georgios, Petros Pistofidis, Georgios Banoutsos, Efthymios Georgiou, and Vassilis Katsouros. 2022. Multimodal classification of safety-report observations. *Applied Sciences*, 12(12):5781.
- Parrot, W. 2001. Emotions in social psychology. *Psychology, Philadelphia*.
- Partalidou, Eleni, Eleftherios Spyromitros-Xioufis, Stavros Doropoulos, Stavros Vologianidis, and Konstantinos Diamantaras. 2019. Design and implementation of an open source greek pos tagger and entity recognizer using spacy. In *IEEE/WIC/ACM International Conference on Web Intelligence, WI '19*, page 337–341, Association for Computing Machinery, New York, NY, USA.
- Pascanu, Razvan, Tomas Mikolov, and Yoshua Bengio. 2013. On the difficulty of training recurrent neural

- networks. In *International conference on machine learning*, pages 1310–1318, Pmlr.
- Pavlopoulos, John, Prodrornos Malakasiotis, and Ion Androutsopoulos. 2017. Deep learning for user comment moderation. *CoRR*, abs/1705.09993.
- Pavlopoulos, John, Prodrornos Malakasiotis, Juli Bakagianni, and Ion Androutsopoulos. 2017. Improved abusive comment moderation with user embeddings. *CoRR*, abs/1708.03699.
- Pavlopoulos, John, Jeffrey Sorensen, Lucas Dixon, Nithum Thain, and Ion Androutsopoulos. 2020. Toxicity detection: Does context really matter? *arXiv preprint arXiv:2006.00998*.
- Pecina, Pavel, Antonio Toral, Vassilis Papavassiliou, Prokopis Prokopidis, and Josef Van Genabith. 2012. Domain adaptation of statistical machine translation using web-crawled resources: a case study. In *Proceedings of the 16th Annual Conference of the European Association for Machine Translation*, pages 145–152.
- Perifanos, George K Mikros-Kostas. 2015. Gender identification in modern greek tweets. *Recent Contributions to Quantitative Linguistics*, 70:75.
- Perifanos, Konstantinos and Dionysis Goutsos. 2021. Multimodal hate speech detection in greek social media. *Multimodal Technologies and Interaction*, 5(7):34.
- Petasis, Georgios, Dimitrios Spiliotopoulos, Nikos Tsirakis, and Panayiotis Tsantilas. 2014. Sentiment analysis for reputation management: Mining the greek web. In *Artificial Intelligence: Methods and Applications: 8th Hellenic Conference on AI, SETN 2014, Ioannina, Greece, May 15-17, 2014. Proceedings 8*, pages 327–340, Springer.
- Peters, Matthew E., Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. 2018. Deep contextualized word representations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 2227–2237, Association for Computational Linguistics, New Orleans, Louisiana.
- Pfeiffer, Jonas, Ivan Vulić, Iryna Gurevych, and Sebastian Ruder. 2020. Mad-x: An adapter-based framework for multi-task cross-lingual transfer. *arXiv preprint arXiv:2005.00052*.
- Pilitsidou, V and V Giouli. 2021. Frame semantics in the specialized domain of finance: Building a termbase to aid translation. *EURALEX XIX*.
- Pires, Telmo, Eva Schlinger, and Dan Garrette. 2019. How multilingual is multilingual bert? In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4996–5001.
- Pitenis, Zeses, Marcos Zampieri, and Tharindu Ranasinghe. 2020. Offensive language identification in greek. *CoRR*, abs/2003.07459.
- Platt, John. 1999. Fast training of support vector machines using sequential minimal optimization. *Advances in Kernel Methods: Support Vector Learning*, pages 185–208.
- Plum, Alistair, Tharindu Ranasinghe, Constantin Orasan, and Ruslan Mitkov. 2019. Rgcl at germeval 2019: Offensive language detection with deep learning.
- Pontiki, Maria, Maria Gavrilidou, Dimitris Gkoumas, and Stelios Piperidis. 2020. Verbal aggression as an indicator of xenophobic attitudes in Greek Twitter during and after the financial crisis. In *Proceedings of the Workshop about Language Resources for the SSH Cloud*, pages 19–26, European Language Resources Association, Marseille, France.
- Pothast, Martin, Paolo Rosso, Efstathios Stamatatos, and Benno Stein. 2019. A decade of shared tasks in digital text forensics at pan. In *Advances in Information Retrieval: 41st European Conference on IR Research, ECIR 2019, Cologne, Germany, April 14–18, 2019, Proceedings, Part II 41*, pages 291–300, Springer.
- Pradhan, Sameer S, Eduard Hovy, Mitch Marcus, Martha Palmer, Lance Ramshaw, and Ralph Weischedel. 2007. Ontonotes: A unified relational semantic representation. In *International Conference on Semantic Computing (ICSC 2007)*, pages 517–526, IEEE.
- Prasad, Rashmi, Nikhil Dinesh, Alan Lee, Eleni Miltsakaki, Livio Robaldo, Aravind K Joshi, and Bonnie L Webber. 2008. The penn discourse treebank 2.0. In *LREC*.
- Prokopidis, Prokopis, Byron Georgantopoulos, and Haris Papageorgiou. 2011. A suite of natural language processing tools for greek. In *The 10th international conference of Greek linguistics*.
- Prokopidis, Prokopis and Harris Papageorgiou. 2017. Universal dependencies for greek. In *Proceedings of the nodalida 2017 workshop on universal dependencies (udw 2017)*, pages 102–106.
- Prokopidis, Prokopis, Vassilis Papavassiliou, and Stelios Piperidis. 2016. Parallel Global Voices: a collection of multilingual corpora with citizen media stories. In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC'16)*, pages 900–905, European Language Resources Association (ELRA), Portorož, Slovenia.
- Prokopidis, Prokopis and Stelios Piperidis. 2020. A neural nlp toolkit for greek. In *11th Hellenic Conference on Artificial Intelligence*, pages 125–128.

- Qi, Peng, Timothy Dozat, Yuhao Zhang, and Christopher D Manning. 2019. Universal dependency parsing from scratch. *arXiv preprint arXiv:1901.10457*.
- Qi, Peng, Yuhao Zhang, Yuhui Zhang, Jason Bolton, and Christopher D. Manning. 2020. Stanza: A python natural language processing toolkit for many human languages. *CoRR*, abs/2003.07082.
- Radford, Alec, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. 2018. Improving language understanding by generative pre-training.
- Radford, Alec, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Raffel, Colin, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *The Journal of Machine Learning Research*, 21(1):5485–5551.
- Rajendran, S, M Anand Kumar, Ratnavel Rajalakshmi, V Dhanalakshmi, P Balasubramanian, and KP Soman. 2022. Tamil NLP Technologies: Challenges, State of the Art, Trends and Future Scope. In *International Conference on Speech and Language Technologies for Low-resource Languages*, pages 73–98, Springer.
- Rajpurkar, Pranav, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. Squad: 100,000+ questions for machine comprehension of text. *arXiv preprint arXiv:1606.05250*.
- Ranasinghe, Tharindu and Marcos Zampieri. 2021. Multilingual offensive language identification for low-resource languages. *ACM Trans. Asian Low-Resour. Lang. Inf. Process.*, 22(1).
- Raunak, Vikas, Arul Menezes, and Marcin Junczys-Dowmunt. 2021. The curious case of hallucinations in neural machine translation. *arXiv preprint arXiv:2104.06683*.
- Rizou, S., A. Paflioti, A. Theofilatos, A. Vakali, G. Sarigiannidis, and K.Ch. Chatzisavvas. 2022. Multilingual name entity recognition and intent classification employing deep learning architectures. *Simulation Modelling Practice and Theory*, 120:102620.
- Rogers, Anna, Matt Gardner, and Isabelle Augenstein. 2023. Qa dataset explosion: A taxonomy of nlp resources for question answering and reading comprehension. *ACM Comput. Surv.*, 55(10).
- Rohatgi, Shaurya, Yanxia Qin, Benjamin Aw, Niranjana Unnithan, and Min-Yen Kan. 2023. The ACL OCL corpus: Advancing open science in computational linguistics. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 10348–10361, Association for Computational Linguistics, Singapore.
- Rohrbach, Anna, Lisa Anne Hendricks, Kaylee Burns, Trevor Darrell, and Kate Saenko. 2018. Object hallucination in image captioning. *arXiv preprint arXiv:1809.02156*.
- Rokade, Prakash P and Kumari D Aruna. 2019. Business intelligence analytics using sentiment analysis-a survey. *International Journal of Electrical and Computer Engineering*, 9(1):613.
- Rosso, Paolo, Francisco Rangel, Martin Potthast, Efstathios Stamatatos, Michael Tschuggnall, and Benno Stein. 2016. Overview of pan’16. In *Experimental IR Meets Multilinguality, Multimodality, and Interaction*, pages 332–350, Springer International Publishing, Cham.
- Roy, Uma, Noah Constant, Rami Al-Rfou, Aditya Barua, Aaron Phillips, and Yinfei Yang. 2020. Lareqa: Language-agnostic answer retrieval from a multilingual pool. *arXiv preprint arXiv:2004.05484*.
- Rumelhart, David E, Geoffrey E Hinton, and Ronald J Williams. 1986. Learning representations by back-propagating errors. *nature*, 323(6088):533–536.
- Rybak, Piotr, Robert Mroczkowski, Janusz Tracz, and Ireneusz Gawlik. 2020. KLEJ: Comprehensive benchmark for Polish language understanding. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1191–1201, Association for Computational Linguistics, Online.
- Safaya, Ali, Moutasem Abdullatif, and Deniz Yuret. 2020. Kuisail at semeval-2020 task 12: Bert-cnn for offensive speech identification in social media. In *Proceedings of the Fourteenth Workshop on Semantic Evaluation*, pages 2054–2059.
- Sahlgren, Magnus. 2008. The distributional hypothesis. *Italian Journal of Disability Studies*, 20:33–53.
- Samaridi, Niki and Stella Markantonatou. 2014. Parsing Modern Greek verb MWEs with LFG/XLE grammars. In *Proceedings of the 10th Workshop on Multiword Expressions (MWE)*, pages 33–37, Association for Computational Linguistics, Gothenburg, Sweden.
- Sang, Erik F and Fien De Meulder. 2003. Introduction to the conll-2003 shared task: Language-independent named entity recognition. *arXiv preprint cs/0306050*.
- Sap, Maarten, Dallas Card, Saadia Gabriel, Yejin Choi, and Noah A Smith. 2019. The risk of racial bias in hate speech detection. In *Proceedings of the 57th annual meeting of the association for computational linguistics*, pages 1668–1678.

- Sardianos, Christos, Ioannis Manousos Katakis, Georgios Petasis, and Vangelis Karkaletsis. 2015. Argument extraction from news. In *Proceedings of the 2nd Workshop on Argumentation Mining*, pages 56–66.
- Savoy, Jacques. 2020. Machine learning methods for stylometry. *Cham: Springer*.
- Schlegel, Viktor, Marco Valentino, André Freitas, Goran Nenadic, and Riza Batista-Navarro. 2020. A framework for evaluation of machine reading comprehension gold standards. *arXiv preprint arXiv:2003.04642*.
- Schmidt, Anna and Michael Wiegand. 2017. A survey on hate speech detection using natural language processing. In *Proceedings of the fifth international workshop on natural language processing for social media*, pages 1–10.
- Schouten, Kim and Flavius Frasinicar. 2015. Survey on aspect-level sentiment analysis. *IEEE Transactions on Knowledge and Data Engineering*, 28(3):813–830.
- Shavrina, Tatiana, Alena Fenogenova, Emelyanov Anton, Denis Shevelev, Ekaterina Artemova, Valentin Malykh, Vladislav Mikhailov, Maria Tikhonova, Andrey Chertok, and Andrey Evlampiev. 2020. RussianSuperGLUE: A Russian language understanding evaluation benchmark. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4717–4726, Association for Computational Linguistics, Online.
- Shoufan, Abdulhadi and Sumaya Alameri. 2015. Natural language processing for dialectal arabic: A survey. In *Proceedings of the second workshop on Arabic natural language processing*, pages 36–48.
- Shukla, Neelesh, Amit Vaid, Raghu Katikeri, Sangeeth Keeriyadath, and Msp Raja. 2022. Dimsum: Distributed and multilingual summarization of financial narratives. In *Proceedings of the 4th Financial Narrative Processing Workshop@ LREC2022*, pages 65–72.
- Singh, Amanpreet, Ronghang Hu, Vedanuj Goswami, Guillaume Couairon, Wojciech Galuba, Marcus Rohrbach, and Douwe Kiela. 2022. Flava: A foundational language and vision alignment model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15638–15650.
- Singh, Jasdeep, Bryan McCann, Nitish Shirish Keskar, Caiming Xiong, and Richard Socher. 2019. Xlda: Cross-lingual data augmentation for natural language inference and question answering.
- Sliwa, Alfred, Yuan Ma, Ruishen Liu, Niravkumar Borad, Seyedeh Ziyaei, Mina Ghobadi, Firas Sabbah, and Ahmet Aker. 2018. Multi-lingual argumentative corpora in English, Turkish, Greek, Albanian, Croatian, Serbian, Macedonian, Bulgarian, Romanian and Arabic. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, European Language Resources Association (ELRA), Miyazaki, Japan.
- Sobhani, Parinaz. 2017. *Stance detection and analysis in social media*. Ph.D. thesis, Université d'Ottawa/University of Ottawa.
- Socha, Kasper. 2020. Ks@ lth at semeval-2020 task 12: Fine-tuning multi-and monolingual transformer models for offensive language detection. In *Proceedings of the Fourteenth Workshop on Semantic Evaluation*, pages 2045–2053.
- Solakidis, Georgios S., Konstantinos N. Vavliakis, and Pericles A. Mitkas. 2014. Multilingual sentiment analysis using emoticons and keywords. In *2014 IEEE/WIC/ACM International Joint Conferences on Web Intelligence (WI) and Intelligent Agent Technologies (IAT)*, volume 2, pages 102–109.
- Spatiotis, Nikolaos, Iosif Mporas, Michael Paraskevas, and Isidoros Perikos. 2016. Sentiment analysis for the greek language. In *Proceedings of the 20th Pan-Hellenic Conference on Informatics, PCI '16*, Association for Computing Machinery, New York, NY, USA.
- Spatiotis, Nikolaos, Michael Paraskevas, Isidoros Perikos, and Iosif Mporas. 2017. Examining the impact of feature selection on sentiment analysis for the greek language. In *Speech and Computer: 19th International Conference, SPECOM 2017, Hatfield, UK, September 12-16, 2017, Proceedings 19*, pages 353–361, Springer.
- Spatiotis, Nikolaos, Isidoros Perikos, Iosif Mporas, and Michael Paraskevas. 2019. Examining the impact of discretization technique on sentiment analysis for the greek language. In *2019 10th International Conference on Information, Intelligence, Systems and Applications (IISA)*, pages 1–6.
- Spatiotis, Nikolaos, Isidoros Perikos, Iosif Mporas, and Michael Paraskevas. 2020. Sentiment analysis of teachers using social information in educational platform environments. *International Journal on Artificial Intelligence Tools*, 29(02):2040004.
- Stamatatos, Efstathios, Walter Daelemans, Ben Verhoeven, Patrick Juola, Aurelio López López, Martin Potthast, and Benno Stein. 2015. Overview of the Author Identification Task at PAN 2015. In *Working Notes Papers of the CLEF 2015 Evaluation Labs*, volume 1391 of *Lecture Notes in Computer Science*.
- Stamatatos, Efstathios, Walter Daelemans, Ben Verhoeven, Martin Potthast, Benno Stein, Patrick Juola, Miguel A Sanchez-Perez, Alberto Barrón-Cedeño, et al. 2014. Overview of the author

- identification task at pan 2014. In *CEUR Workshop Proceedings*, volume 1180, pages 877–897, CEUR-WS.
- Stamatatos, Efstathios, Michael Tschuggnall, Ben Verhoeven, Walter Daelemans, Günther Specht, Benno Stein, and Martin Potthast. 2016. Clustering by Authorship Within and Across Documents. In *Working Notes Papers of the CLEF 2016 Evaluation Labs*, volume 1609 of *Lecture Notes in Computer Science*.
- Stasimioti, Maria, Vilelmini Sosoni, Katia Kermanidis, and Despoina Mouratidis. 2020. Machine translation quality: A comparative evaluation of SMT, NMT and tailored-NMT outputs. In *Proceedings of the 22nd Annual Conference of the European Association for Machine Translation*, pages 441–450, European Association for Machine Translation, Lisboa, Portugal.
- Steen, G. 2007. *Finding Metaphor in Grammar and Usage: A Methodological Analysis of Theory and Research*. Converging evidence in language and communication research. J. Benjamins Publishing Company.
- Straka, Milan and Jana Straková. 2017. Tokenizing, pos tagging, lemmatizing and parsing ud 2.0 with udpipe. In *Proceedings of the CoNLL 2017 shared task: Multilingual parsing from raw text to universal dependencies*, pages 88–99.
- Sugawara, Saku, Yūsuke Kido, Hikaru Yokono, and Akiko Aizawa. 2017. Evaluation metrics for machine reading comprehension: Prerequisite skills and readability. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 806–817.
- Tsakalidis, Adam, Nikolaos Aletras, Alexandra I. Cristea, and Maria Liakata. 2018a. Nowcasting the stance of social media users in a sudden vote: The case of the greek referendum. In *Proceedings of the 27th ACM International Conference on Information and Knowledge Management, CIKM '18*, page 367–376, Association for Computing Machinery, New York, NY, USA.
- Tsakalidis, Adam, Symeon Papadopoulos, and Ioannis Kompatsiaris. 2014. An ensemble model for cross-domain polarity classification on twitter. In *Web Information Systems Engineering–WISE 2014: 15th International Conference, Thessaloniki, Greece, October 12–14, 2014, Proceedings, Part II 15*, pages 168–177, Springer.
- Tsakalidis, Adam, Symeon Papadopoulos, Rania Voskaki, Kyriaki Ioannidou, Christina Boididou, Alexandra I Cristea, Maria Liakata, and Yiannis Kompatsiaris. 2018b. Building and evaluating resources for sentiment analysis in the greek language. *Language resources and evaluation*, 52:1021–1044.
- Tsampos, Ioannis and Emmanouil I. Marakakis. 2023. A medical question answering system with NLP and graph database. In *Proceedings of the Workshops of the EDBT/ICDT 2023 Joint Conference, Ioannina, Greece, March, 28, 2023*, volume 3379 of *CEUR Workshop Proceedings*, CEUR-WS.org.
- Turney, Peter D. 2002. Thumbs up or thumbs down? semantic orientation applied to unsupervised classification of reviews. *CoRR*, cs.LG/0212032.
- Urbizu, Gorka, Iñaki San Vicente, Xabier Saralegi, Rodrigo Agerri, and Aitor Soroa. 2022. Basqueglue: A natural language understanding benchmark for basque. In *Proceedings of the Thirteenth Language Resources and Evaluation Conference*, pages 1603–1612.
- Vaswani, Ashish, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems*, 30.
- Ventoura, Nikolett, Kosmas Palios, Yannis Vasilakis, Georgios Paraskevopoulos, Nassos Katsamanis, and Vassilis Katsouros. 2021. Theano: A Greek-speaking conversational agent for COVID-19. In *Proceedings of the 1st Workshop on NLP for Positive Impact*, pages 36–46, Association for Computational Linguistics, Online.
- Wang, Alex, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. 2019a. Superglue: A stickier benchmark for general-purpose language understanding systems. *Advances in neural information processing systems*, 32.
- Wang, Alex, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R Bowman. 2019b. Glue: A multi-task benchmark and analysis platform for natural language understanding. In *7th International Conference on Learning Representations, ICLR 2019*.
- Wang, Peng, An Yang, Rui Men, Junyang Lin, Shuai Bai, Zhikang Li, Jianxin Ma, Chang Zhou, Jingren Zhou, and Hongxia Yang. 2022a. Ofa: Unifying architectures, tasks, and modalities through a simple sequence-to-sequence learning framework. In *International Conference on Machine Learning*, pages 23318–23340, PMLR.
- Wang, Shuohuan, Jiaxiang Liu, Xuan Ouyang, and Yu Sun. 2020. Galileo at semeval-2020 task 12: Multi-lingual learning for offensive language identification using pre-trained language models. *arXiv preprint arXiv:2010.03542*.
- Wang, Wenhui, Hangbo Bao, Li Dong, Johan Bjorck, Zhiliang Peng, Qiang Liu, Kriti Aggarwal, Owais Khan Mohammed, Saksham Singhal,

- Subhojit Som, et al. 2022b. Image as a foreign language: Beit pretraining for all vision and vision-language tasks. *arXiv preprint arXiv:2208.10442*.
- Wang, Yu, Yuelin Wang, Kai Dang, Jie Liu, and Zhuo Liu. 2021. A comprehensive survey of grammatical error correction. *ACM Transactions on Intelligent Systems and Technology (TIST)*, 12(5):1–51.
- Wankhade, Mayur, Annavarapu Chandra Sekhara Rao, and Chaitanya Kulkarni. 2022. A survey on sentiment analysis methods, applications, and challenges. *Artificial Intelligence Review*, 55(7):5731–5780.
- Waseem, Zeerak, Thomas Davidson, Dana Warmusley, and Ingmar Weber. 2017. Understanding abuse: A typology of abusive language detection subtasks. *arXiv preprint arXiv:1705.09899*.
- Welbl, Johannes, Amelia Glaese, Jonathan Uesato, Sumanth Dathathri, John Mellor, Lisa Anne Hendricks, Kirsty Anderson, Pushmeet Kohli, Ben Coppin, and Po-Sen Huang. 2021. Challenges in detoxifying language models. *arXiv preprint arXiv:2109.07445*.
- Welleck, Sean, Ilya Kulikov, Stephen Roller, Emily Dinan, Kyunghyun Cho, and Jason Weston. 2019. Neural text generation with unlikelihood training. *arXiv preprint arXiv:1908.04319*.
- Werbos, Paul J. 1988. Generalization of backpropagation with application to a recurrent gas market model. *Neural networks*, 1(4):339–356.
- Wilie, Bryan, Karissa Vincentio, Genta Indra Winata, Samuel Cahyawijaya, Xiaohong Li, Zhi Yuan Lim, Sidik Soleman, Rahmad Mahendra, Pascale Fung, Syafri Bahar, and Ayu Purwarianti. 2020. IndoNLU: Benchmark and resources for evaluating Indonesian natural language understanding. In *Proceedings of the 1st Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 10th International Joint Conference on Natural Language Processing*, pages 843–857, Association for Computational Linguistics, Suzhou, China.
- Wilkinson, Mark D, Michel Dumontier, IJsbrand Jan Aalbersberg, Gabrielle Appleton, Myles Axton, et al. 2016. The FAIR Guiding Principles for scientific data management and stewardship. *Scientific data*, 3(1):1–9.
- Wong, Derek F, Lidia S Chao, and Xiaodong Zeng. 2014. isentenizer-: Multilingual sentence boundary detection model. *The Scientific World Journal*, 2014.
- Woolf, Beverly Park. 2010. *Building intelligent interactive tutors: Student-centered strategies for revolutionizing e-learning*. Morgan Kaufmann.
- Xu, Liang, Hai Hu, Xuanwei Zhang, Lu Li, Chenjie Cao, Yudong Li, Yechen Xu, Kai Sun, Dian Yu, Cong Yu, et al. 2020. Clue: A chinese language understanding evaluation benchmark. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 4762–4772.
- Yang, Yang, Zhilei Wu, Yuexiang Yang, Shuangshuang Lian, Fengjie Guo, and Zhiwei Wang. 2022. A survey of information extraction based on deep learning. *Applied Sciences*, 12(19):9691.
- Zampieri, Marcos, Shervin Malmasi, Preslav Nakov, Sara Rosenthal, Noura Farra, and Ritesh Kumar. 2019. Predicting the type and target of offensive posts in social media. *arXiv preprint arXiv:1902.09666*.
- Zampieri, Marcos, Preslav Nakov, Sara Rosenthal, Pepa Atanasova, Georgi Karadzhov, Hamdy Mubarak, Leon Derczynski, Zeses Pitenis, and Çağrı Çöltekin. 2020. Semeval-2020 task 12: Multilingual offensive language identification in social media (offenseval 2020). *CoRR*, abs/2006.07235.
- Zervanou, Kalliopi, Elias Iosif, and Alexandros Potamianos. 2014. Word semantic similarity for morphologically rich languages. In *LREC*, pages 1642–1648.
- Zhang, Xulang, Rui Mao, and Erik Cambria. 2023. A survey on syntactic processing techniques. *Artificial Intelligence Review*, 56(6):5645–5728.
- Zhu, Fengbin, Wenqiang Lei, Chao Wang, Jianming Zheng, Soujanya Poria, and Tat-Seng Chua. 2021. Retrieving and reading: A comprehensive survey on open-domain question answering. *CoRR*, abs/2101.00774.

Acronyms

AI Artificial Intelligence. 63

BoW Bag of Words. 17, 18, 63

CBOS Continuous Bag of Skip-Gram. 18, 63

CBOW Continuous Bag of Words. 18, 63

CRF Conditional Random Field. 24, 63

DL Deep Learning. 1, 2, 4, 5, 11–14, 16, 22, 23, 31, 33, 36, 37, 48, 63, 66

DNN Deep Neural Network. 20, 21, 38, 63

DSM Distributional Semantic Model. 17, 18, 20, 63

GEC Grammatical Error Correction. 10, 14, 16, 17, 42, 44, 46, 47, 63

GLU General Language Understanding. 63

GNN Graph Neural Network. 23, 63

GPU Graphics Processing Unit. 63

GRU Gated Recurrent Unit. 31, 63

GSL Greek Sign Language. 36, 63

IE Information Extraction. 2, 6, 14, 20–22, 46, 63

IR Information Retrieval. 34, 63

LFG/XLE Lexical-Functional Grammar / Xerox Linguistic Environment. 16, 63

LGBTQ Lesbian, Gay, Bisexual, Transgender, Queer. 63

LLM Large Language Model. 2, 10, 13, 23, 30, 37, 42, 63, 66

LM Language Model. 2, 5, 10, 18, 20, 23, 31, 32, 38, 39, 48, 63, 66

LR Language Resource. 1, 2, 6, 7, 9–11, 16, 17, 19, 21, 22, 24, 29, 32, 33, 35–39, 42, 44, 45, 48, 63, 67

LSTM Long Short-Term Memory. 21, 23, 31, 63

ML Machine Learning. 2, 4, 5, 11–14, 23, 24, 28, 31, 39, 40, 42, 47, 63, 66

MT Machine Translation. 2, 6, 10, 36–39, 46, 63, 66

MWE Multi-word expression. 16, 63

NER Named Entity Recognition. 6, 10, 15, 20–22, 44, 63

NLG Natural Language Generation. 63, 65, 66

NLI Natural Language Inference. 38, 63

NLP Natural Language Processing. 1–17, 20, 27, 30, 35–37, 39–42, 45–48, 63, 64, 66

NLU Natural Language Understanding. 14, 34, 35, 63, 65, 66

NMT Neural Machine Translation. 20, 23, 37–39, 63

NN Neural Network. 11, 12, 16, 23, 63, 66

Open IE Open Information Extraction. 20, 38, 63

PLM Pre-trained Language Model. 5, 12, 13, 18, 63

POS Part of Speech. 12, 15, 21, 24, 31, 63, 66

QA Question Answering. 2, 6, 10, 33–36, 38, 42, 46, 47, 63, 66

RDF Resource Description Framework. 21, 63

RF Random Forest. 63

RNN Recurrent Neural Network. 5, 12, 13, 31, 37, 39, 63

SA Sentiment Analysis. 2, 6, 9, 10, 22–27, 38, 42, 46, 63, 67, 68

SCFG Synchronous Context-free Grammar. 19, 63

SMO Sequential Minimal Optimization. 28, 63

SMT Statistical Machine Translation. 10, 36, 37, 63

SVM Support Vector Machine. 24, 63

TF-IDF Term Frequency - Inverse Document Frequency. 5, 23, 31, 39, 40, 63

UD Universal Dependencies. 15, 44, 63

VLC Virtual Learning Community. 32, 33, 63

XLM-R XLM-RoBERTa. 12, 13, 31, 63

Appendix A: Quality Assurance Search Round

The search strategy for retrieving publications on Greek NLP research involved querying three databases using their APIs, with the query terms Greek (or Modern Greek) and “natural language processing” for the period January 2012 to December 2022 (§3.1).

To ascertain that we performed a comprehensive search, we conducted an additional round of searches on Google Scholar for the same time period. Google Scholar does not provide an API for automated data retrieval, which is why it was not included in the core search rounds. This supplementary search employed more specific query terms aimed at broadening our exploration, including specific NLP downstream tasks alongside “Greek” and either “Natural Language Processing” or “NLP”. Table A.1 summarizes this supplementary search process.

We performed 23 queries, employing various alternatives, acronyms, and operators for selected NLP tasks from September 12th, 2023, to November 6th, 2023. Whenever the retrieved papers numbered less than 100, all were examined; otherwise, only the initial thirty were reviewed⁷⁴.

The queries led us to review 698 publications, of which 357 were retained after removing duplicates both across previous search rounds and within the same round. Following the search process of the previous rounds, we kept those publications, that references the term “Greek” in either the title or abstract. However, for this particular round, a refined approach was adopted. Publications were retained only if they explicitly mentioned the term “natural language processing” within the context of the publication itself, excluding records where the term appeared solely in the references. This distinction allowed for a more targeted and focused selection, ensuring that the retained publications directly addressed NLP in connection with the Greek language.

⁷⁴ The count of the top 30 papers seemed adequate, as beyond these, the subsequent papers didn’t appear to be relevant.

Table A.1

The queries and the number of papers retrieved from Google Scholar during the quality assurance search round.

QUERY	# PAPER
“TOXICITY DETECTION” “NATURAL LANGUAGE PROCESSING” GREEK	64
“TOXICITY DETECTION” GREEK NLP	70
“TOXICITY DETECTION” + GREEK + NLP	40
“TOXICITY DETECTION” AND “GREEK” AND “NLP”	32
“OFFENSIVE LANGUAGE” “NATURAL LANGUAGE PROCESSING” GREEK	525
“ABUSIVE LANGUAGE” “NATURAL LANGUAGE PROCESSING” GREEK	420
“HATEFUL LANGUAGE” “NATURAL LANGUAGE PROCESSING” GREEK	48
“AGGRESSIVE LANGUAGE” “NATURAL LANGUAGE PROCESSING” GREEK	44
“AUTHORSHIP ATTRIBUTION” “NATURAL LANGUAGE PROCESSING” GREEK	803
“AUTHORSHIP IDENTIFICATION” “NATURAL LANGUAGE PROCESSING” GREEK	330
“AUTHORSHIP ANALYSIS” “NATURAL LANGUAGE PROCESSING” GREEK	324
“AUTHORSHIP DETECTION” “NATURAL LANGUAGE PROCESSING” GREEK	61
“SENTIMENT ANALYSIS” GREEK NLP	7,490
“SENTIMENT ANALYSIS” “NATURAL LANGUAGE PROCESSING” GREEK	7,050
“SENTIMENT ANALYSIS” “GREEK” “NLP”	2,430
“MACHINE TRANSLATION” GREEK NLP	9,160
“MACHINE TRANSLATION” “GREEK” “NLP”	3,750
“NAMED ENTITY RECOGNITION” “NATURAL LANGUAGE PROCESSING” GREEK	4350
“NAMED ENTITY RECOGNITION” GREEK	5,550
“QUESTION ANSWERING” “NATURAL LANGUAGE PROCESSING” GREEK	4,840
SUMMARIZATION “NATURAL LANGUAGE PROCESSING” GREEK	16,600
SEMANTICS “NATURAL LANGUAGE PROCESSING” GREEK	17,100
SYNTAX “NATURAL LANGUAGE PROCESSING” GREEK	14,400

The subsequent step in our screening process involved applying all the exclusion criteria established for the preceding core search rounds. Among the remaining publications, we selectively retained those that were indexed in either the ACL Anthology, Scopus, or Semantic Scholar databases. Ultimately, 3 publications were found, that were not retrieved by our core search process.

Appendix B: Natural Language Understanding and Generation

This Appendix first discusses Natural Language Understanding (NLU), which enables machines to understand natural language, and then Natural Language Generation (NLG), which is the process of generating meaningful text (Khurana et al. 2023).

Natural Language Understanding

NLU enables machines to understand, interpret, and derive meaning from human language in a way that is both accurate and contextually relevant. It addresses a wide range of linguistic phenomena, from lexical semantics concerning aspects of word meaning to the high-level reasoning and application of

world knowledge (Wang et al. 2019b). These linguistic phenomena are foundational for various NLP tasks, as they provide the essential linguistic comprehension needed to analyse the textual data (Bowman and Dahl 2021).

Traditional ML approaches represent texts by engineered features (e.g., based on Part of Speech (POS) tags or lexicons) or by character and word embeddings, encoding the linguistic knowledge into the input, before solving the task at hand. In the DL era, on the other hand, linguistic skills are encoded in Neural Network (NN) models via language modeling (Belinkov, Gehrmann, and Pavlick 2020). Therefore they are considered as an evaluation criterion, by assessing Large Language Models (LLMs) on datasets annotated for various linguistic phenomena. General-purpose NLU evaluation benchmark datasets exist primarily for English (Bommasani, Liang, and Lee 2023; Chen and Gao 2022; Wang et al. 2019a; Dong et al. 2019; Nie et al. 2019; Wang et al. 2019b), but also for other languages (Urbizu et al. 2022; Shavrina et al. 2020; Wilie et al. 2020; Xu et al. 2020; Rybak et al. 2020; Ham et al. 2020). Unfortunately, such NLU benchmarks are currently unavailable for Greek, based on our survey, except from Greek translations (e.g., from English) that sets a shallow resource.

Natural Language Generation

NLG involves the generation of human understandable natural language text from various data formats, such as text, structured data, video, and audio. NLG techniques are used in many downstream tasks, such as summarization, dialogue generation, Question Answering (QA), and Machine Translation (MT). Recent advancements in DL, particularly Transformer-based LMs such as BART (Lewis et al. 2020), GPT-2 (Radford et al. 2019), and GPT-3 (Brown et al. 2020), have fueled a rapid progress in NLG (§2.2.2). Alongside the advancement of NLG models, attention toward their limitations and potential risks has also increased (Ji et al. 2023). An example is output degeneration (Holtzman et al. 2019; Welleck et al. 2019), which refers to generated output that is bland, incoherent, or gets stuck in repetitive loops. Another example is the generation of nonsensical text, or text that is unfaithful to the provided source input (Raunak, Menezes, and Junczys-Dowmunt 2021; Rohrbach et al. 2018), also known as hallucination (Maynez et al. 2020).

The main NLG downstream tasks in Greek are two, QA (§11) and MT (§12). However, we also detected two summarization studies, which we discuss below and the Table B.1 displays the two datasets pertaining to the task.⁷⁵

Summarization. El-Haj et al. (2022) reported findings from the Financial Narrative Summarisation Shared Task (FNS-2022), part of the Financial Narrative Processing 2022 Workshop (FNP 2022 Workshop) (El-Haj, Rayson, and Zmandar 2022). This task involved summarizing financial annual reports in Greek, English, and Spanish. Fourteen systems from seven teams participated, with all but three systems addressing Greek and Spanish. The Greek dataset included 262 financial reports in PDF format, ranging from 100 to 300 pages, each with at least three human-generated gold-standard summaries. Furthermore, Li et al. (2013) provided an overview of the multilingual summarization data collection process for the MultiLing 2013 Workshop of ACL 2013 (Giannakopoulos 2013), which included a multilingual summarization task. This task aimed to evaluate language-independent summarization algorithms across

⁷⁵ Although these papers are both significant and pertain to shared tasks, we opted not to allocate a separate section due to the limited number of publications focusing on summarization.

different languages using the MultiLing 2013 corpus derived from WikiNews.⁷⁶ The English dataset was translated into nine languages, including Greek, and summaries were generated by human experts.

Table B.1

LRs for summarization, with information on availability (Lmt: limited availability; tags are linkable; see Table 3 for details), annotation type (see Table 4 for details), size, and size unit, and text domain.

AUTHORS	AVAILABILITY	ANN. TYPE	SIZE	SIZE UNIT	DOMAIN
El-Haj et al. (2022)	Lmt	MANUAL	262	DOCUMENT	FINANCE
Li et al. (2013)	Lmt	MANUAL	1,050	DOCUMENT	VARIOUS

Appendix C: Sentiment Analysis and Argument Mining

Sentiment, opinion, and emotion can be approached by various annotation schemas. Our work presents only the ones employed in the retrieved papers. Binary Sentiment Analysis (SA), where the text's polarity is either positive or negative, is the primary approach used in most papers cited in this study ([Bilanos 2022](#); [Kapoteli, Koukaras, and Tjortjis 2022](#); [Alexandridis et al. 2021](#); [Kydros, Argyropoulou, and Vrana 2021](#); [Braoudaki et al. 2020](#); [Beleveslis et al. 2019](#); [Medrouk and Pappa 2018, 2017](#); [Athanasίου and Maragoudakis 2017](#); [Giatsoglou et al. 2017](#); [Charalampakis et al. 2016](#); [Markopoulos et al. 2015](#)). However, several studies ([Alexandridis et al. 2021](#); [Drakopoulos et al. 2020](#); [Beleveslis et al. 2019](#); [Tsakalidis et al. 2018b](#); [Makrynioti and Vassalos 2015](#); [Petasis et al. 2014](#)) added a neutral class for texts carrying no opinion.

Five-class sentiment classification ([Spatiotis et al. 2020, 2019, 2017, 2016](#)) increases the granularity, with scales from positive to negative. Subjectivity detection can precede SA, by addressing the binary task of whether the text comprises sentiment or not ([Solakidis, Vavliakis, and Mitkas 2014](#)). Instead of the coarse level of sentiment and subjectivity, however, one can also focus on fine-grained emotions ([Alexandridis et al. 2022](#); [Tsakalidis et al. 2018b](#); [Chatzakou, Vakali, and Kafetsios 2017](#); [Solakidis, Vavliakis, and Mitkas 2014](#)), using different emotion categories that have been suggested by theorists in psychology ([Kafetsios and Nezlek 2012](#); [Parrot 2001](#); [Ekman 1982](#); [Arnold 1960](#)).⁷⁷ A common approach, finally, concerns the selection of a single emotion or sentiment that is related to a specific condition, such as the anxiety during the COVID19 pandemic ([Kydros, Argyropoulou, and Vrana 2021](#)) or sarcasm/irony ([Tsakalidis et al. 2018b](#); [Antonakaki et al. 2017, 2016](#)).

A critical distinction between SA approaches is the level of granularity of the analysis. The coarser granularity concerns the document level, where the overall sentiment of an entire document is assessed. A finer granularity regards the sentence level, where the sentiment of short texts, such as tweets or the individual sentences within a document, is analyzed. SA can also be aspect-based, where the sentiment towards specific aspects or features of an entity is evaluated. These are described in detail below:

- **Document-level SA** involves the detection of the emotions expressed in an opinion document (e.g., a lengthy product review) or its classification as positive or negative (i.e., the sentiment polarity). Analysis at this level focuses on the sentiment of the entire

⁷⁶ <https://www.wikinews.org/>

⁷⁷ Ekman has identified six emotions, i.e. anger, disgust, fear, joy, sadness, and surprise, as primary

document, as a whole (e.g., a product review), without considering entities or aspects within the document.

- **Sentence-level SA** concerns short texts, such as tweets or the sentences of a document. Although analysis at the sentence level is similar to that at the document level, the former can be more challenging due to the limited context contained. Also, classification at the sentence level cannot easily ignore the neutral class, because sentences with no opinion are more likely to appear. That is, even opinionated documents comprise sentences that bear no sentiment. Furthermore, a common (although implicit) assumption at research tasks focusing on the sentence level is that each sentence expresses a single sentiment (Liu 2020), which, however, is not always the case.
- **Aspect-based SA**, also known as topic-based, entity-based, or target-based SA, as there is not a single term that sounds natural in every application domain (Schouten and Frasincar 2015), is the analysis that focuses on the sentiment expressed in a document or sentence with respect to a specific aspect of an entity. For example, in the sentence “iPhone’s battery lasts long” the entity is iPhone and the aspect is battery. Closely related to aspect-based SA is the **stance detection** task (Küçük and Can 2020), which aims to identify the stance (as in favor of or against) of the text author towards a target (person, organization, movement, policy, etc.) either explicitly mentioned or implied within the text (Mohammad et al. 2016; Sobhani 2017). Only a few published studies concern SA on Greek at this granularity.
- **Argument Mining** is the task of extracting natural language arguments and their relationships from text. The final objective is to provide machine-processable structured data for computational models of argument, to facilitate the automatic identification of reasoning capabilities upon the retrieved arguments and relations (Cabrio and Villata 2018).

Appendix D: Toxicity Detection

Our study uses the term toxicity as a broader umbrella term of unwanted user-generated content including hateful and violent speech (Waseem et al. 2017). Although no standard definition exists today and some researchers are against oversimplifying solutions (Díaz et al. 2022), our choice is driven simply by the practical need to cover all the subtypes in a single name. However, the definition of toxicity itself is controversial: different cultures, languages, dialects, social groups, minority groups do not necessarily agree on what constitutes toxicity; furthermore, aggressive language use is not always toxic, e.g., inside a group, swear words can function as solidarity markers.