Case2Code: Learning Inductive Reasoning with Synthetic Data

Yunfan Shao^{1,2}, Linyang Li^{2†}, Yichuan Ma^{1,2}, Peiji Li^{1,2}, Demin Song², Qinyuan Cheng^{1,2}, Shimin Li¹, Xiaonan Li¹, Pengyu Wang¹, Qipeng Guo², Hang Yan^{2,3}, Xipeng Qiu^{1†}, Xuanjing Huang¹, Dahua Lin^{2,3}

¹School of Computer Science, Fudan University

²Shanghai AI Laboratory

³The Chinese University of Hong Kong
{yfshao19, xpqiu}@fudan.edu.cn
{lilinyang, yanhang}@pjlab.org.cn

Abstract

Complex reasoning is an impressive ability shown by large language models (LLMs). Most LLMs are skilled in deductive reasoning, such as chain-of-thought prompting or iterative toolusing to solve challenging tasks step-by-step. In this paper, we hope to focus on evaluating and teaching LLMs to conduct inductive reasoning, that is, LLMs are supposed to infer underlying rules by observing examples or sequential transformations. However, collecting large-scale and diverse human-generated inductive data is challenging. We focus on data synthesis in the code domain and propose a Case2Code task by exploiting the expressiveness and correctness of programs. Specifically, we collect a diverse set of executable programs, synthesize input-output transformations for each program, and force LLMs to infer the underlying code implementations based on the synthetic I/O cases. We first evaluate representative LLMs on the synthesized Case2Code task and demonstrate that the Case-to-code induction is challenging for LLMs. Then, we synthesize large-scale Case2Code training samples to train LLMs to perform inductive reasoning. Experimental results show that such induction training benefits not only in distribution Case2Code performance but also enhances various coding abilities of trained LLMs, demonstrating the great potential of learning inductive reasoning via synthetic data.1

1 Introduction

The success of large language models (LLMs), exemplified by GPT-4 (OpenAI, 2023) has revolutionized the AI community. One of the most impressive abilities of LLMs is the deductive reasoning ability via chain-of-thoughts (Wei et al., 2022b), exemplified by solving mathematical reasoning tasks such as GSM8K (Cobbe et al., 2021)

Reasoning Type	Example	Count in Dataset
Deductive Reasoning	Explain this function for me: def func(a): return a + 5	Common
	Write a program that find the largest and the smallest number in the list.	Common
Inductive	Suppose we have: func(1) == 6 func(2) == 7 func(3) == 8 func(4) == 9 Explain this function for me.	Rare
Reasoning	Write a program to convert texts like this: "john Smith" -> "Smith, John" "frank lee" -> "Lee, Frank" "Laura Jane Jones" -> "Jones, Laura"	Rare

Figure 1: Examples of deductive and inductive reasoning in the code domain. Compared with instructions that need deductive reasoning, inductive reasoning instructions are rare in the training data, which makes it challenging for LLMs to learn.

and MATH (Hendrycks et al., 2021). The major contribution to the high-level performances of reasoning problem solving is to generate and train on deductive reasoning paths via chain-of-thoughts (CoTs) using LLMs (Yu et al., 2023; Mitra et al., 2024). Through various searching strategies and prompting algorithms (Chen et al., 2024; Wang et al., 2023a; Yao et al., 2023; Wang et al., 2022b), LLMs can synthesize high-quality CoTs and perform deduction reasoning in many domains.

Despite the success of deducing chain-of-thought reasoning, LLMs are rarely trained to perform inductive reasoning. Inductive reasoning is a fundamental cognitive process for humans, playing a crucial role in learning, problem-solving, and scientific discovery. For instance, famous scientists make inductive judgments from actual physical phenomena, such as Newton's Law of Motion, and Kepler's Law based on data from Tycho. It is essential to teach artificial intelligence systems utilizing

[†]Corresponding Authors.

¹Code and datasets will be available at https://github.com/choosewhatulike/case2code.

inductive reasoning to find underlying rules from facts, transformations, and logs. In this paper, to equip LLMs with such inductive reasoning ability, we introduce **Case2Code**, a diverse and challenging inductive reasoning task for LLMs.

Specific and limited inductive reasoning has been studied in the machine learning field. Works such as DEER (Yang et al., 2022) usually design a common knowledge induction process and challenge neural models to reason inductively to find the hidden fact. Works such as DreamCoder (Ellis et al., 2021) and DeepCoder (Balog et al., 2016), usually synthesize a small-scale toy task to train a domain-specific model, such as learning to summarize the list operations from given list change logs.

Different from these inductive reasoning tasks, we focus on large-scale data synthesis with programs in the real world. In Case2Code, inductive reasoning samples are synthesized from real-world productive functions, which are closer to the actual distribution of general LLM applications and production. Specifically, the Case2Code challenge requires the LLM to infer the underlying program based on several input-to-output cases generated by the real-world program. In Case2Code learning, LLMs are supposed to write solutions formulated by codes based on the example outputs, which is one common scenario in the real-world working process, using examples to convey knowledge.

To obtain large-scale and diverse Case2Code data, we first gather a diverse collection of executable code texts that cover a wide range of real-world applications. Then, we generate the input-output transformation cases with the assistance of LLMs and code interpreters, which do not require powerful LLMs with advanced reasoning capabilities, resulting in a strong-to-weak distilling process. By incorporating LLMs to write input examples for each program and execute the program with these inputs to gather the corresponding outputs, we can synthesize large-scale Case2Code samples with diverse data transformations and complicated control logic.

Based on the synthetic data, we can form a unique and challenging task to evaluate and further train the LLMs and study the induction reasoning ability of LLMs. In the Case2Code challenge, we first test how current LLMs perform in making inductive reasoning. We then train LLMs with Case2Code data to further study whether such data can improve the induction reasoning ability

and generalize to other commonly used reasoning tasks. Experimental results show that Case2Code is a challenging task for LLMs, even for powerful LLMs like LLaMA3-70B, GPT-3.5, and GPT-4. With constructed Case2Code data, we can boost LLMs to learn to make such inductive reasoning, while such ability can be transferred to help improve general reasoning tasks such as HumanEval and MBPP in code generation.

To summarize, in this paper, we:

- (1) We introduce an induction reasoning task for LLMs, **Case2Code**, pointing out the necessity to synthesize inductive reasoning data for LLMs.
- (2) We can teach LLMs to make induction reasoning, improving open-source LLMs by a great margin in the Case2Code challenge.
- (3) Equipped with our proposed Case2Code ability, open-source LLMs can be further improved in general reasoning tasks.

2 Related Work

Our work discusses the reasoning ability of LLMs, touching on the following grounds:

2.1 Inductive Reasoning

While Reasoning is one major topic for neural networks, especially in the era of LLMs (Huang and Chang, 2022), inductive reasoning is rarely discussed in LLM reasoning, most research focuses on specific scenarios with limited inductive reasoning. One pioneer work is prerequisite toy tasks (Weston et al., 2015) where the task goal is to solve simple induction. Later, Yang et al. (2022) introduces various world-wide knowledge such as botany, history and geography into the facts given and asks neural models to predict whether a given rule is correct. On the other hand, several works focus on training inductive program synthesis models for constrained scenarios with limited search spaces, such as operations on list, string, and manuallydefined objects (Balog et al., 2016; Devlin et al., 2017; Ellis et al., 2021; Shi et al., 2023). Different from previous reasoning ability studies, our proposed Case2Code task leverages diverse code in the real world as a powerful platform for LLMs to learn inductive reasoning under various challenging scenarios.

2.2 Synthetic Reasoning Data

The most widely studied LLMs reasoning task is the deductive reasoning ability, represented by

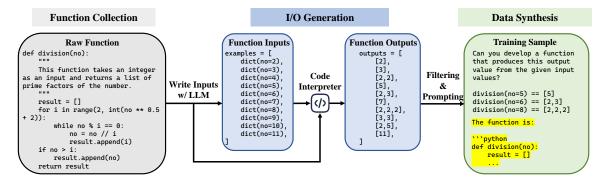


Figure 2: Our synthetic framework incorporates an LLM and a code interpreter to construct Case2Code training samples at scale automatically.

chain-of-thoughts (CoTs) reasoning (Wei et al., 2022b), which instructs LLMs to solve problems in detailed deductive steps. Recent works focus on building high-quality CoTs through strong LLMs such as GPT-4 to enhance smaller LLMs (Yu et al., 2023; Mitra et al., 2024; Luo et al., 2023). While a particular line of work focuses on studying different search strategies of reasoning paths, including self-consistency (Wang et al., 2022a), rejection sampling (Huang et al., 2023; Yuan et al., 2023; Wang et al., 2023a), tree-structure CoT (ToT) searching (Yao et al., 2023), Monte Carlo Tree Searching (Silver et al., 2016; Chen et al., 2024), etc.

3 Method

In this section, we illustrate the framework for synthesizing Case2Code data in detail, which focuses on producing large-scale and high-quality inductive reasoning data in the code domain. Unlike other synthetic data frameworks that distill high-quality training data from a strong teacher LLM to provide supervision signals to improve student LLMs, our Case2Code synthetic framework introduces a writer LLM to assist the synthesis of data samples. Thus the overall data quality does not directly rely on the performance of the LLM generator. And we can efficiently obtain reliable Case2Code training data at scale.

3.1 Problem Formulation

The inductive reasoning task aims to find a general hypothesis based on a small set of observations to explain a phenomenon. In this paper, we define Case2Code, an inductive reasoning task in the code domain. Case2Code is a program synthesis task that targets the reconstruction of unknown programs based on observations of the program behaviors.

Formally, for a functional program \mathcal{P} , we have a set of n input-output examples $\mathcal{S}_{\mathcal{P}} = \{(x_1,y_1),(x_2,y_2),...,(x_n,y_n)\}$, where $y_i = \mathcal{P}(x_i), i=1,2,...,n$. The goal of Case2Code is to implement a program \mathcal{P}' that captures the functionality of the program \mathcal{P} based on the observed set of input-output example cases $\mathcal{S}_{\mathcal{P}}$. And for any new input case $x_{\text{new}} \notin \mathcal{S}_{\mathcal{P}}$, the implemented program \mathcal{P}' should satisfy that $\mathcal{P}(x_{\text{new}}) = \mathcal{P}'(x_{\text{new}})$.

3.2 Framework Overview

In our synthetic data generation framework, we focus on generating large-scale and diverse Case2Code data automatically. As shown in Figure 2, we first collect diverse programs from large-scale datasets with rule-based filters. Then we incorporate LLMs to write diverse example inputs and utilize the code interpreter to calculate their corresponding outputs for each program. Finally, we filter out low-quality programs based on their outputs and convert the obtained triple (program, inputs, outputs) into Case2Code data for inductive reasoning in the code domain.

Note that the correctness of our synthetic data does not depend on the capabilities of the used LLMs. Therefore, we can synthetic high-quality Case2Code data at scale using small LLMs with low costs.

3.3 Collecting Programs

To obtain massive data samples for inductive reasoning learning, we first need to acquire massive and diverse programs that take input arguments, do some complicated processes, and return output values. Instead of prompting LLMs to generate functions that meet these requirements, we collect human-written high-quality programs in the wild to enhance diversity.

Specifically, we sample valid Python functions

from The Stack (Kocetkov et al., 2022) to construct our reasoning dataset. We incorporate the out-of-box Abstract Syntax Tree (AST) parsing tool ² to parse each file in The Stack to obtain Python functions. We only keep self-contained high-quality functions that satisfy all of these filtering rules: (1) pass the syntax check; (2) have one or more input arguments and return values; and (3) do not rely on third-party packages or external I/O operations. After collecting these functions, we can easily execute and verify these functions to obtain diverse Case2Code data with a simple and fast code interpreter at scale, which avoids extra file or network operations that require a sophisticated sandbox.

3.4 Generating Inputs

Once we collect large-scale functions, the next step is to obtain the corresponding input-output pairs for each function to construct the Case2Code data. It is infeasible to write test cases for each function manually. So, we utilize LLMs to generate suitable input examples for these functions. We prompt LLMs to write some example input arguments for each function based on the corresponding function implementation. Detailed prompt is listed in Table 6 in the appendix.

To generate suitable input arguments, the LLM needs first to analyze the implementation of the functions, then infer the possible types and value ranges of the input arguments, and finally come up with correct input arguments. However, we argue that a powerful LLM is not the key factor for our synthetic data. As we find that while strong LLMs can write high-quality inputs to generate Case2Code training data that boosts the reasoning performance of weak LLMs, the weak LLM can also write inputs for creating Case2Code data to self-improve their reasoning ability (see Sec 4.4). Therefore, the generation process can be scaled efficiently at a low cost by using small LLMs.

3.5 Obtain Outputs

After collecting self-contained functions and the corresponding inputs, it is intuitive to incorporate a code interpreter to run these functions on their inputs for output curation. Since the LLM-generated input examples can contain errors, we introduced a filtering procedure to reject invalid inputs or functions based on their returned outputs. Specifically, if the outputs of a function do not change as the

inputs change (e.g. always return the same output or exceptions), the function is considered invalid and will be filtered out.

Moreover, we also filter out functions that generate very long output values to ensure the length of the generated Case2Code data is within the context window size of current LLMs. Note that we do not filter out inputs that lead to exceptions or runtime errors, as we believe that failure call attempts can also provide valuable information for inductive reasoning to reconstruct the function.

3.6 Post-processing

The final step is to convert the obtained functions and their corresponding input-output pairs into Case2Code style data. Formally, for a given function \mathcal{P} and its n test cases $\mathcal{S}_{\mathcal{P}} = \{(x_1,y_1),(x_2,y_2),...,(x_n,y_n)\}$, we randomly sample m examples (m <= n) as the observed set $\mathcal{S}'_{\mathcal{P}}$. We generate the prompted data that facilitate the LLM to conduct inductive reasoning on the observed examples $\mathcal{S}'_{\mathcal{P}}$ to reconstruct the given function \mathcal{P} . Converted training examples are shown in Table 7 in the appendix.

We find that the diversity of the prompts can substantially affect the generalization of the model reasoning performance (as shown in Sec 4.4). Therefore, we manually construct about 10 prompts with different styles to enhance the data diversity.

4 Experiment

In this section, we illustrate the experimental setups and discuss the experimental results to demonstrate the challenge of solving Case2Code problems and show the effectiveness of large-scale Case2Code synthetic data.

4.1 Experimental Setup

Data Construction We randomly sampled about 2.3 million functions from The Stack pre-training dataset, in which we already performed data deduplication with the evaluation benchmarks (e.g. HumanEval, MBPP, etc). We conduct the data synthetic pipeline incorporating InternLM2-7b (Cai et al., 2024) to generate input examples for each function. The temperature is set to 0.2 and the top_p is set to 0.95. The generation takes about 500 GPU hours using A800 GPUs. Then we use 64 CPUs to execute and filter functions, which takes about 1 hour. The execution is under a constrained Python environment to ensure safety.

²https://docs.python.org/3/library/ast.html

	Size	HumanEval	HumanEval+	MBPP	MBPP+	Case2Code
GPT-4	-	90.2	86.6	85.7	73.3	43.6
GPT-3.5	-	76.8	70.7	82.5	69.7	34.2
	7B	14.0	11.6	26.8	20.3	0.2
LLaMA2-Chat	13B	23.1	19.5	37.0	27.6	8.2
LLaMA2-Chai	34B	22.6	-	33.0	-	_
	70B	36.6	28.7	46.3	35.1	7.8
	7B	37.8	35.4	59.5	46.8	14.2
CodeLLaMA-Instruct	13B	42.7	38.4	63.5	52.6	19.0
	34B	51.8	43.9	69.3	56.3	22.6
I I aMA2 Instruct	8B	61.6	56.7	70.1	59.3	10.4
LLaMA3-Instruct	70B	77.4	72.0	82.3	69	22.6

Table 1: Results of Code Benchmarks and zero-shot Case2Code performance of various representative LLMs.

We eventually obtained 1.3M high-quality functions with input-output pairs for Case2Code reasoning. We hold out 500 samples for evaluation and the rest for training. For the hold-out evaluation samples, we further prompted GPT-4 (gpt-4-turbo-2024-04-09) to generate additional input examples and collect the corresponding outputs for a more strict inductive reasoning evaluation.

Training Setup To demonstrate the generalization and effectiveness of our synthetic training data, we conduct three variants of Case2Code training: direct fine-tuning, mixed pre-training, and mixed fine-tuning. All Case2Code variants are trained for 5k steps with a batch size of 64, a maximum context window size of 4096, and apply linear warmup and cosine decay of the learning rate from the peak value of 2e-5 to 5e-6. All model training is completed on two servers of eight A800 GPUs. We conduct training on open-sourced models, i.e. InternLM2-7B (Cai et al., 2024) and LLaMA3-8B (AI@Meta, 2024) to verify the effectiveness of synthetic training data on different model series.

Evaluation Setup We evaluate the coding ability of trained LLMs with HumanEval, MBPP. To conduct strict evaluation, we use EvalPlus, an extension to the original HumanEval and MBPP with massive additional test cases. For models that are not instructed tuned, we apply zero-shot prompting and four-shot prompting for HumanEval and MBPP evaluation, respectively. And for instructed-aligned LLMs, we use zero-shot prompting on all these benchmarks. To evaluate inductive reason-

ing on code, we test various LLMs on solving Case2Code tasks, with zero-shot prompting. When evaluating the instructed models that are not tuned on Case2Code task, we find the performance is unstable and sensitive to the prompts. We manually optimized the prompts for Case2Code evaluation to elicit the actual inductive reasoning ability of these models. We use greedy decoding during the inference for all experiments.

Models We compare the trained models with several families of representative LLMs: GPT series(OpenAI, 2023), CodeLLaMA (Rozière et al., 2023), LLaMA2 (Touvron et al., 2023) and LLaMA3 (AI@Meta, 2024). For GPT series, we evaluate GPT-3.5 (gpt-3.5-turbo-0125) and GPT-4 (gpt-4-turbo-2024-04-09). For other model series, we evaluate their available opensourced versions.

4.2 Zero-shot Case2Code Performance

As shown in Table 1, we report the zero-shot Case2Code performance of different representative LLMs and their programming performance. We can find that the zero-shot Case2Code performance of representative models is strongly related to their corresponding program synthesis performance. Models with higher program synthesis scores tend to achieve higher Case2Code performance. And larger models often outperform small models. This indicates that Case2Code can become a good benchmark to reflect the code reasoning performance of different LLMs. However, the zero-shot Case2Code scores of LLMs have a large gap compared with their coding accuracy, which

	Train w/ Ours	HumanEval	HumanEval+	МВРР	MBPP+	Case2Code
InternLM2-7B-Base	Х	31.1	21.3	51.4	40.3	27.2 [†]
w/ Direct Fine-tuning	✓	44.5	34.8	56.0	40.4	44.4
w/ Mixed Pre-training	✓	43.9	40.9	58.4	42.6	41.4
InternLM2-7B	Х	39.0	33.4	56.8	54.1	25.6 [†]
w/ Direct Fine-tuning	✓	43.3	40.9	54.5	40.6	44.5
w/ Mixed Pre-training	✓	47.6	37.2	58.4	45.6	42.4
w/ Insturction-tuning	×	49.4	43.9	58.0	50.4	6.2
w/ Mixed Instruction-tuning	✓	64.6	56.7	63.4	52.4	44.0
LLaMA3-8B	Х	35.4	20.1	59.1	45.1	29.2 [†]
w/ Direct Fine-tuning	✓	43.2	39.0	50.6	35.1	44.8
w/ Mixed Pre-training	✓	47.6	40.9	55.6	41.1	42.6
w/ Insturction-tuning	X	49.8	45.7	57.6	47.9	8.6
w/ Mixed Instruction-tuning	✓	64.8	57.9	71.2	53.1	45.0

Table 2: Results of models trained with Case2Code synthetic dataset and the corresponding generalization performance. Case2Code performance are evaluated with zero-shot prompting, except results with †, which are evaluated with four-shot prompting.

demonstrates that existing LLMs are better at some types of reasoning (e.g. writing programs based on instructions) than others (e.g. inductive programs by their behaviors). This can be explained as the LLMs are trained with massive program generation data but fewer samples similar to Case2Code that need inductive reasoning. Similar to the Reverse Curse (Berglund et al., 2023), models trained with deductive reasoning data struggle to transfer to inductive reasoning tasks.

4.3 Generalization of Case2Code

One essential issue of synthetic data is its generalization ability. Therefore, we train different LLMs with our synthetic Case2Code dataset under various settings to explore how it affects the learning of code reasoning of LLMs.

4.3.1 Direct Fine-tuning

First, we find that LLMs that are directly trained on the Case2Code reasoning samples can effectively learn coding based on cases. As shown in Table 2, by direct fine-tuning, Internlm2-7B and LLaMA3-8B can significantly outperform the few-shot prompting baselines by up to 18.9%, achieve up to 44.5% and 42.0% accuracy on Case2Code evaluation set, respectively, which even outperforms the more powerful LLMs like LLaMA3-70B, GPT-3.5, and comparable with GPT-4 (results in Table 1). Moreover, models trained with Case2Code reasoning also improve their program synthesis performance on benchmarks like HumanEval and MBPP. This indicates

that the Case2Code reasoning is general and challenging. Training on Case2Code samples not only boosts the inductive reasoning performance in distribution but enhances the code understanding and code generation abilities of LLMs. As the Case2Code samples can be synthetic at scale, we believe that synthesizing large-scale and high-quality inductive reasoning data is a promising path to consistently improve LLMs without exhausting data.

4.3.2 Mixed Training

Then, we explore how to better incorporate our synthetic Case2Code data into different stages of LLM training to enhance the reasoning ability of LLMs in general. Specifically, we train LLMs with two variants of data mixing, either during pre-training or in the supervised fine-tuning (SFT) stage. The first mixing strategy introduces natural language pre-training texts from the Pile (Gao et al., 2021) and the code pre-training samples from The Stack (Kocetkov et al., 2022). The mixing ratio is 1:1:2 for samples from the Pile, The Stack, and the Case2Code dataset, respectively. On the other hand, we incorporate a supervised finetuning (SFT) dataset from WizardCoder (Luo et al., 2023) to demonstrate that the performance gain of Case2Code training does not come from the understanding of instructions but the learning of inductive reasoning of code execution. We combine the SFT dataset with Case2Code samples in a 1:3 ratio, as the size of our synthetic dataset is much larger.

Mixed Pre-training As shown in Table 2, when incorporated into the pre-training stage, the Case2Code training data helps the model to connect the execution states with the function implementation, which further facilitates the program synthesis performance of these LLMs. Compared with directly fine-tuned on Case2Code dataset, training these samples with pre-training texts enables the generalization of inductive reasoning of code states learned by the Case2Code task.

Mixed Instruction-tuning When trained with instruction-following datasets, the Case2Code data also improves the performance of the programming with instruction tasks, as reported in Table 2. We evaluate the SFT models with the zero-shot instructed version of programming synthesis tasks, HumanEval, and MBPP. We find that incorporating Case2Code data boosts the performance of various LLMs on code generation tasks. Compared to the corresponding SFT baselines, InternLM2-7B improves on HumanEval from 49.4% to 64.6%, with more than 10% improvements. LLaMA3-8B achieves 64.6%, 57.9%, and 71.2% on HumanEval, HumanEval+, and MBPP, respectively, with significant improvements compared to the SFT version. These results demonstrate the effectiveness of learning on Case2Code and the necessity of incorporating inductive reasoning data into LLM training.

4.4 Ablation Study

In this section, we conduct ablation studies to demonstrate the effectiveness of the Case2Code synthetic pipeline across different families and scales of LLMs.

Prompt Diversity Since the synthetic Case2Code training data is converted by triples of (programs, inputs, outputs), during the construction, the prompt templates are utilized to embed the input-output pairs to form natural language texts for LLM to learn. As the LLM can only rely on these converted prompts to learn the Case2Code, it is important to understand the effectiveness of how different prompt templates affect the training of LLMs. Intuitively, the diversity of prompt templates plays an important role in the learning of LLMs. Therefore, we compare synthetic data prompted using a single template style with data utilizing diverse styles of templates. The result is reported in Figure 3, in which diverse prompts may have little effect on the in-domain Case2Code performance, however,




Figure 3: Downstream results when directly fine-tuning InternLM2-7B with different Case2Code prompt templates. Diverse prompts not only help the model to learn Case2Code reasoning but also significantly advance the generalization of the code inductive reasoning.

the diversity significantly affects the accuracy of LLMs on out-of-domain program synthesis tasks. It is indicated that diversity can be critical during LLM learning, which also has been discussed in other domains like in general natural language processing tasks (Wei et al., 2022a) and alignment (Ouyang et al., 2022; Wang et al., 2023b).

	TP	TGS	Costs	# Samples
InternLM2-7B	1	1600 tokens/s	$1 \times$	1.3M
LLaMA3-70B	4	720 tokens/s	$4.5 \times$	700K

Table 3: Efficiency of using different LLM Writers for Input Generation. "TP" refers to the size of the tensor parallel for inference. "TGS" refers to the inference throughput (tokens/s) of each LLM instance. "Costs" refers to the relative compute costs of different LLM generators. Due to the large TP and low throughput, the large LMs can be more costly than the small LMs when inferencing on the same number of GPUs. In our data synthetic process, using LLaMA3-70B costs about 9× compute resources compared to small models like InternLM2-7B. Due to the high costs of LLaMA3-70B, we only sub-sample the raw data to run the data synthesis. The total costs are still 4.5× compared to InternLM2-7B.

LLM for Generating Inputs During the synthesis of Case2Code data, a critical step is prompting the LLM to write several input examples for each program. These inputs are then executed with the corresponding programs one by one to obtain the program outputs, thus we can utilize these important contexts to construct Case2Code train-

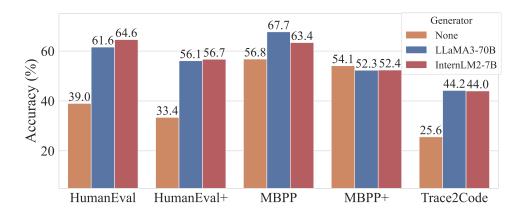


Figure 4: Downstream results when fine-tuning InternLM2-7B with synthetic data using different input example generators. Generator "None" refers to the baseline InternLM2-7B not trained on any Case2Code data. The computational overhead of using LLaMA3-70B is $4.5\times$ that of InternLM2-7B.

	HumanEval	HumanEval+	MBPP	MBPP+	Case2Code
InternLM2-1.8B	32.3	29.9	43.6	24.3	27.8
InternLM2-7B	64.6	56.7	63.4	52.4	42.2
InternLM2-20B	73.1	65.2	77.4	55.4	46.0

Table 4: Code results with different scales of models, after supervised fine-tuning on the instruction-following dataset mixed with Case2Code synthetic data.

To explore whether the reasoning ing data. ability of the LLM writer affects the synthetic data quality, we replace the LLM generator from Interlm2-7B to LLaMA3-70B, and rerun the data synthesis pipeline to obtain a new version of Case2Code training data. Due to the high costs of LLaMA3-70B, we only generate half the size of our original synthetic data. Detailed generation costs are reported in Table 3. We train Interlm2-7B with this version of Case2Code dataset under the instruction-tuning setup to evaluate the data quality. As shown in Figure 4, compared with the InternLM2-7B generator, large LMs like LLaMA3-70B can write high-quality input samples that help trained LLMs to achieve comparable code reasoning capability with fewer training data. It indicates that the input generation step can affect the overall synthetic data quality, suggesting data collectors choose a strong LLM to be the input writer if compute resources are sufficient. However, we note that LLaMA3-70B contains too many parameters that are $4.5\times$ more costly than InternLM2-7B. By generating inputs with InternLM2-7B, our Case2Code data synthesis framework maintains generation efficiency and data quality. It also demonstrates the possibility of self-improving for LLMs on their code reasoning capabilities.

Model Scale We want to explore whether the Case2Code data synthesized using a small model can still improve a large model, and how the model scale affects the learning process. Therefore, we use Case2Code data generated with InternLM2-7B to train models in the InternLM2 series to investigate these questions. The training is taken under the setting of data mixing with SFT dataset (Luo et al., 2023) and the results are shown in Table 4. Our synthetic data consistently enhances the code reasoning performance of various sizes of LLMs, even though one of the student models is almost three times larger than the model used for data synthesis. These results demonstrate the possibilities of weak-to-strong supervision in code-related tasks at scale.

5 Conclusion

We first construct a new benchmark Case2Code to evaluate the inductive reasoning capability of LLMs in the code domain. Then, we propose a data synthetic framework to construct Case2Code training samples at scale. By just using small LLMs and a code interpreter, we can collect high-quality Case2Code data from pre-training code texts automatically and efficiently. By training on various LLMs in multiple settings, we demonstrate the Case2Code can improve not only the inductive reasoning ability of LLM but also the general coding

capabilities. We believe synthetic Case2Code is a promising way to continue improving the LLMs when human-generated data is exhausted.

Limitations

In this work, we study Case2Code, a synthetic task for learning inductive reasoning capabilities. Our work is still limited in several aspects:

- Potential harmful programs: we gather and filter programs from the pre-training code corpus, which excludes code that may contain dangerous operations like system calls, file manipulation, and network traffic that require careful safety checks and vulnerability mitigation. In the future one can incorporate a safe and reliable execution environment that supports these operations for Case2Code synthesis.
- Programming languages: we focus on synthesizing Case2Code data using Python programs, as it is a commonly used programming language and can be easily and reliably manipulated and executed. Future work can extend the data synthesis framework to more programming languages and applications.
- Long context: some inputs or outputs of the given programs can be extremely long, which can be challenging to fit into the context window of current LLMs. Future work can explore efficient methods of representing and learning long-context case-to-code induction.
- Data modality: we represent cases in our Case2Code data as texts for LLM training, however, real-world programs often interact with multi-modal inputs and outputs like audio, image, and video. How to effectively collect and learn multi-modal inductive reasoning remains a big challenge.

References

AI@Meta. 2024. Llama 3 model card.

- Matej Balog, Alexander L Gaunt, Marc Brockschmidt, Sebastian Nowozin, and Daniel Tarlow. 2016. Deepcoder: Learning to write programs. *arXiv preprint arXiv:1611.01989*.
- Lukas Berglund, Meg Tong, Max Kaufmann, Mikita Balesni, Asa Cooper Stickland, Tomasz Korbak, and

- Owain Evans. 2023. The reversal curse: Llms trained on "a is b" fail to learn "b is a". *CoRR*, abs/2309.12288.
- Zheng Cai, Maosong Cao, Haojiong Chen, Kai Chen, Keyu Chen, Xin Chen, Xun Chen, Zehui Chen, Zhi Chen, Pei Chu, Xiaoyi Dong, Haodong Duan, Qi Fan, Zhaoye Fei, Yang Gao, Jiaye Ge, Chenya Gu, Yuzhe Gu, Tao Gui, Aijia Guo, Qipeng Guo, Conghui He, Yingfan Hu, Ting Huang, Tao Jiang, Penglong Jiao, Zhenjiang Jin, Zhikai Lei, Jiaxing Li, Jingwen Li, Linyang Li, Shuaibin Li, Wei Li, Yining Li, Hongwei Liu, Jiangning Liu, Jiawei Hong, Kaiwen Liu, Kuikun Liu, Xiaoran Liu, Chengqi Lv, Haijun Lv, Kai Lv, Li Ma, Runyuan Ma, Zerun Ma, Wenchang Ning, Linke Ouyang, Jiantao Qiu, Yuan Qu, Fukai Shang, Yunfan Shao, Demin Song, Zifan Song, Zhihao Sui, Peng Sun, Yu Sun, Huanze Tang, Bin Wang, Guoteng Wang, Jiaqi Wang, Jiayu Wang, Rui Wang, Yudong Wang, Ziyi Wang, Xingjian Wei, Qizhen Weng, Fan Wu, Yingtong Xiong, and et al. 2024. Internlm2 technical report. CoRR, abs/2403.17297.
- Guoxin Chen, Minpeng Liao, Chengxi Li, and Kai Fan. 2024. Alphamath almost zero: process supervision without process. *ArXiv*, abs/2405.03553.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. 2021. Training verifiers to solve math word problems. *CoRR*, abs/2110.14168.
- Jacob Devlin, Jonathan Uesato, Surya Bhupatiraju, Rishabh Singh, Abdel-rahman Mohamed, and Pushmeet Kohli. 2017. Robustfill: Neural program learning under noisy I/O. In *Proceedings of the 34th International Conference on Machine Learning, ICML 2017, Sydney, NSW, Australia, 6-11 August 2017*, volume 70 of *Proceedings of Machine Learning Research*, pages 990–998. PMLR.
- Kevin Ellis, Catherine Wong, Maxwell Nye, Mathias Sablé-Meyer, Lucas Morales, Luke Hewitt, Luc Cary, Armando Solar-Lezama, and Joshua B Tenenbaum. 2021. Dreamcoder: Bootstrapping inductive program synthesis with wake-sleep library learning. In *Proceedings of the 42nd acm sigplan international conference on programming language design and implementation*, pages 835–850.
- Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, Shawn Presser, and Connor Leahy. 2021. The pile: An 800gb dataset of diverse text for language modeling. *CoRR*, abs/2101.00027.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. 2021. Measuring mathematical problem solving with the MATH dataset. In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks 1, NeurIPS Datasets and Benchmarks* 2021, *December* 2021, *virtual*.

- Jiaxin Huang, Shixiang Gu, Le Hou, Yuexin Wu, Xuezhi Wang, Hongkun Yu, and Jiawei Han. 2023. Large language models can self-improve. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 1051–1068. Association for Computational Linguistics.
- Jie Huang and Kevin Chen-Chuan Chang. 2022. Towards reasoning in large language models: A survey. *arXiv preprint arXiv:2212.10403*.
- Denis Kocetkov, Raymond Li, Loubna Ben Allal, Jia Li, Chenghao Mou, Carlos Muñoz Ferrandis, Yacine Jernite, Margaret Mitchell, Sean Hughes, Thomas Wolf, Dzmitry Bahdanau, Leandro von Werra, and Harm de Vries. 2022. The stack: 3 TB of permissively licensed source code. *CoRR*, abs/2211.15533.
- Ziyang Luo, Can Xu, Pu Zhao, Qingfeng Sun, Xiubo Geng, Wenxiang Hu, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. 2023. Wizardcoder: Empowering code large language models with evolinstruct. *CoRR*, abs/2306.08568.
- Arindam Mitra, Hamed Khanpour, Corby Rosset, and Ahmed Awadallah. 2024. Orca-math: Unlocking the potential of slms in grade school math. *CoRR*, abs/2402.14830.
- OpenAI. 2023. GPT-4 technical report. *CoRR*, abs/2303.08774.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul F. Christiano, Jan Leike, and Ryan Lowe. 2022. Training language models to follow instructions with human feedback. In Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 December 9, 2022.
- Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Tal Remez, Jérémy Rapin, Artyom Kozhevnikov, Ivan Evtimov, Joanna Bitton, Manish Bhatt, Cristian Canton-Ferrer, Aaron Grattafiori, Wenhan Xiong, Alexandre Défossez, Jade Copet, Faisal Azhar, Hugo Touvron, Louis Martin, Nicolas Usunier, Thomas Scialom, and Gabriel Synnaeve. 2023. Code llama: Open foundation models for code. *CoRR*, abs/2308.12950.
- Kensen Shi, Joey Hong, Manzil Zaheer, Pengcheng Yin, and Charles Sutton. 2023. Exedec: Execution decomposition for compositional generalization in neural program synthesis. *CoRR*, abs/2307.13883.
- David Silver, Aja Huang, Chris J. Maddison, Arthur Guez, Laurent Sifre, George van den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Vedavyas Panneershelvam, Marc Lanctot, Sander Dieleman,

- Dominik Grewe, John Nham, Nal Kalchbrenner, Ilya Sutskever, Timothy P. Lillicrap, Madeleine Leach, Koray Kavukcuoglu, Thore Graepel, and Demis Hassabis. 2016. Mastering the game of go with deep neural networks and tree search. *Nat.*, 529(7587):484–489.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton-Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurélien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. Llama 2: Open foundation and finetuned chat models. CoRR, abs/2307.09288.
- Peiyi Wang, Lei Li, Zhihong Shao, R. X. Xu, Damai Dai, Yifei Li, Deli Chen, Y. Wu, and Zhifang Sui. 2023a. Math-shepherd: Verify and reinforce llms step-by-step without human annotations. *CoRR*, abs/2312.08935.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2022a. Self-consistency improves chain of thought reasoning in language models. *arXiv* preprint arXiv:2203.11171.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Huai hsin Chi, and Denny Zhou. 2022b. Self-consistency improves chain of thought reasoning in language models. *ArXiv*, abs/2203.11171.
- Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A. Smith, Daniel Khashabi, and Hannaneh Hajishirzi. 2023b. Self-instruct: Aligning language models with self-generated instructions. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, ACL 2023, Toronto, Canada, July 9-14, 2023, pages 13484–13508. Association for Computational Linguistics.
- Jason Wei, Maarten Bosma, Vincent Y. Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M. Dai, and Quoc V. Le. 2022a. Finetuned language models are zero-shot learners. In The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022. OpenReview.net.

- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. 2022b. Chain-of-thought prompting elicits reasoning in large language models. In *NeurIPS*.
- Jason Weston, Antoine Bordes, Sumit Chopra, Alexander M Rush, Bart Van Merriënboer, Armand Joulin, and Tomas Mikolov. 2015. Towards ai-complete question answering: A set of prerequisite toy tasks. *arXiv preprint arXiv:1502.05698*.
- Zonglin Yang, Li Dong, Xinya Du, Hao Cheng, Erik Cambria, Xiaodong Liu, Jianfeng Gao, and Furu Wei. 2022. Language models as inductive reasoners. *arXiv preprint arXiv:2212.10923*.
- Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik Narasimhan. 2023. Tree of thoughts: Deliberate problem solving with large language models. *ArXiv*, abs/2305.10601.
- Longhui Yu, Weisen Jiang, Han Shi, Jincheng Yu, Zhengying Liu, Yu Zhang, James T Kwok, Zhenguo Li, Adrian Weller, and Weiyang Liu. 2023. Metamath: Bootstrap your own mathematical questions for large language models. *arXiv preprint arXiv:2309.12284*.
- Zheng Yuan, Hongyi Yuan, Chengpeng Li, Guanting Dong, Chuanqi Tan, and Chang Zhou. 2023. Scaling relationship on learning mathematical reasoning with large language models. *CoRR*, abs/2308.01825.

A Prompts Used in Case2Code

We demonstrate the prompts used during the Case2Code synthesis, training, and evaluation as follows:

- The prompt template for evaluating zero-shot Case2Code performance of various LLMs is listed in Table 5.
- We show the prompt for using LLMs as input generators for synthesizing Case2Code data in Table 6.
- We randomly sample some Case2Code data to demonstrate in Table 7.

Prompt Template for Zero-shot Case2Code Evaluation.

{prompt}

Please write the correct names of arguments. As the function you implement will be called by: {func_name}(**input_dict). Keep the original type. No need to convert the output to string.

Table 5: Prompt template for zero-shot Case2Code evaluation. We inject {prompt} and {func_name} for each test sample for evaluation.

Prompt for LLM Input Generator

```
Given the function, first analyze the types of the function arguments, then write
10 different example inputs for the function, each example should be a dict with
function arguments' names and their values.
Output format:
  `python
examples = [
    dict(argname=argvalue),
]...
Function:
 ``python
def test_func(a: int, b: str) -> str:
    return str(a) + b
Examples:
```python
examples = [
 dict(a=1, b='a'),
 dict(a=2, b='b'),
 dict(a=3, b='c'),
 dict(a=4, b='d'),
 dict(a=5, b='e'),
 dict(a=6, b='f'),
 dict(a=7, b='g'),
 dict(a=8, b='h'),
 dict(a=9, b='i'),
 dict(a=10, b='j'),
]
Function:
 `python
{code}
Examples:
```

Table 6: Prompt for LLM input generator, we replace {code} with programs collected in for Case2Code.

```
Case2Code Examples
Input: dict(s="abcba", center=2), Output: "(5, 0, 4)"
Input: dict(s="abcdefg", center=3), Output: "(1, 3, 3)"
Input: dict(s="aba", center=1), Output: "(3, 0, 2)'
Input: dict(s= aba , center=1), output: (3, 0, 2)
Input: dict(s="racecar", center=3), Output: "(7, 0, 6)"
Input: dict(s="madam", center=2), Output: "(5, 0, 4)"
Input: dict(s="abcabcabc", center=4), Output: "(1, 4, 4)"
Input: dict(s="xyzyx", center=2), Output: "(5, 0, 4)"
Input: dict(s="hello", center=2), Output: "(1, 2, 2)"
Input: dict(s="ab", center=0), Output: "(1, 0, 0)"
Input: dict(s="a", center=0), Output: "(1, 0, 0)"
Write a function that generates the output from the input.
Function: greatest_palindrome_size_odd
The function is:
```python
def greatest_palindrome_size_odd(s, center):
     right = center + 1
     left = center - 1
     size = 1
     optimum_right = optimum_left = center
     while left >= 0 and right < len(s):
          if s[left] == s[right]:
               size += 2
               optimum\_left = left
               optimum_right = right
               right += 1
               left -= 1
          else:
               break
     return size, optimum_left, optimum_right
Arguments and results:
Input: dict(seq="ATCG", complementarity={'A': 'U', 'T': 'A', 'C': 'G', 'G': 'C'}),
Output: "'CGAU'"
Input: "ATCG", {'A': 'T', 'T': 'A', 'C': 'G', 'G': 'C'}, Output: "'CGAT'"
Input: seq: "ACGT", complementarity: {'A': 'U', 'T': 'A', 'C': 'G', 'G': 'C'}, Output:
"'ACGU'"
Input: "ACGT", {'A': 'T', 'T': 'A', 'C': 'G', 'G': 'C'}, Output: "'ACGT'"
Please write a function to process the input arguments and produce the specified
outputs.
Start with the function:
reverse_complement
The function is:
```python
def reverse_complement(seq, complementarity):
 bases = list(seq)
 bases = [complementarity[base] for base in bases]
reversed_complement = ''.join(bases)
 return reversed_complement[::-1]
```

Table 7: Case2Code data examples.