

Towards Automated Data Sciences with Natural Language and SageCopilot: Practices and Lessons Learned

Yuan Liao¹, Jiang Bian¹, Yuhui Yun¹, Shuo Wang¹, Yubo Zhang^{1,2}, Jiaming Chu^{1,3},
Tao Wang^{1,3}, Kewei Li¹, Yuchen Li¹, Xuhong Li¹, Shilei Ji¹, Haoyi Xiong¹

¹Baidu Inc., ²Beihang University, ³Beijing University of Posts and Telecommunications
Haidian District, Beijing, China

ABSTRACT

While the field of NL2SQL has made significant advancements in translating natural language instructions into executable SQL scripts for data querying and processing, achieving full automation within the broader data science pipeline—encompassing data querying, analysis, visualization, and reporting—remains a complex challenge. This study introduces SageCopilot, an advanced, industry-grade system that automates the data science pipeline by integrating Large Language Models (LLMs), Autonomous Agents (AutoAgents), and Language User Interfaces (LUIs). Specifically, SageCopilot incorporates a two-phase design: an online component refining users' inputs into executable scripts through In-Context Learning [4] (ICL) and running the scripts for results reporting & visualization, and an offline preparing demonstrations requested by ICL in the online phase. A list of trending strategies such as Chain-of-Thought and prompt-tuning have been used to augment SageCopilot for enhanced performance. Through rigorous testing and comparative analysis against prompt-based solutions, SageCopilot has been empirically validated to achieve superior end-to-end performance in generating/executing scripts and offering results with visualization, backed by real-world datasets. Our in-depth ablation studies highlight the individual contributions of various components and strategies used by SageCopilot to the end-to-end correctness for data sciences.

CCS CONCEPTS

• Information systems → Computing platforms.

KEYWORDS

Large Language Models, AutoAgents, Data Analysis, In-Context Learning, Human-Computer Interaction.

1 INTRODUCTION

The advancements in Text-to-SQL generation propose promising approaches to convert textual instructions into structured query

language (SQL) for database operations [7, 15, 17, 20, 21]. However, achieving full automation in the data science pipeline is challenging [7] due to the complexity of understanding user intents [6, 9], integrating access control mechanisms [8], and providing user-intention-driven visualizations of query results [2]. Thus, a comprehensive automation system needs to encapsulate intention understanding, data retrieval and analysis, and the generation of visual outputs, which traditionally requires expert involvement.

The integration of LLMs and AutoAgents has paved the way for establishing comprehensive data science pipelines that connect language user interfaces (LUIs), databases, and data visualization tools with LLMs [19]. AutoAgents can clarify user intentions using conversational interfaces and then plan for data querying, analysis, and visualization by utilizing LLM capabilities. By coordinating tasks across databases, authenticators, and visualization tools, as well as employing SQL & scripts generation [1, 3, 13], and data format conversions [1], AutoAgents can fulfill complex data science requirements autonomously. Though techniques to improve every single component, such as NL2SQL, have been intensively studied in previous works [1, 3, 7, 13, 15, 17, 20, 21], integrating these components is still a challenging task for achieving the goal of automated data sciences in an industry settings. Several non-trivial technical issues should be addressed as follows.

- *Closed-Loop System with Multi-Tool*: Existing systems, such as ChatGPT or Code Interpreter, either generate scripts under users' supervision or manipulate uploaded datasets for potential data analysis. Human intervention (e.g., checking the correctness of the generated scripts, copying and pasting the scripts to a local execution environment for further data manipulations) might be indispensable between every steps of interactions. However, for full automation of data science pipelines, there needs a system that processes user requests, manages databases, executes scripts, and reports analysis results in a seamless closed-loop, minimizing human intervention.
- *Domain Adaptation and Generalization*: To enhance the accuracy of script generation, supervised fine-tuning (SFT) of LLMs subject to various tasks is desired. However, SFT for adapting every data domain (e.g., databases for groceries stores, wholesales, corporate finance, etc.) or collecting a sufficiently large dataset for cross-domain generalization is resource consuming. Inappropriate SFT could hurt emergent abilities of an LLM due to catastrophic forgetting [12]. Thus, in addition to domain-specific SFT, the system should be capable of adapting to every data domain in the context of interactions with LLMs.
- *End-to-End Correctness and Reflection*: Though every single component could be optimized with better accuracy or capacity, the

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
Conference'17, July 2017, Washington, DC, USA

© 2024 Association for Computing Machinery.
ACM ISBN 978-x-xxxx-xxxx-x/YY/MM...\$15.00
<https://doi.org/10.1145/nnnnnnnn.nnnnnnnn>

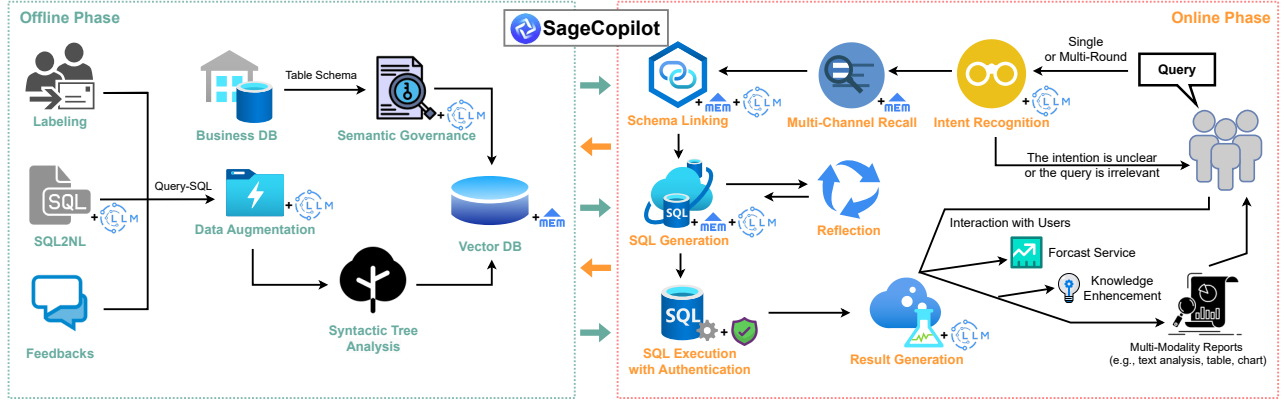


Figure 1: The Overall framework of SageCopilot.

system might hurt the overall user experience when it did not integrate the components well. The whole system should be aware of end-to-end correctness while some critical components should be “self-reflectable” towards the correctness and completeness of its input and output.

To achieve above goals, we propose SageCopilot – a novel, industry-grade system to automate the data science pipelines. As shown in Figure 1, SageCopilot consists of two phases. Given a database to be hosted by SageCopilot, the offline phase first generates sufficient demonstrations for ICL to support the online phase. On the other hand, the online phase handles the user’s requests for data query and analysis while providing scripts generation, data manipulation and results visualization functionalities based on ICL with LLMs. The main contributions of this work are as follows.

- Given the demands of data analysis described as texts, we study the technical problem to correctly generate executable scripts that could automatically and safely run on external data tools of diverse types, such as MySQL, Spark, Hive, Flink, and eChart, within an industry-grade data science pipeline encompassing querying, analysis, visualization, authentication functionalities. To the best of our knowledge, this work is the first to incorporate LLMs, AutoAgents, UIs, databases, visualizers, authenticators, and other tools all in a closed-loop engaged with data users, by addressing autonomy, correctness and safety issues of querying, analysis and visualization.
- To address the technical problem, we propose a novel automated data sciences system, namely SageCopilot, based on newly fashioned LLM-driven AutoAgent technologies. Specifically, to maximize the accuracy of script generation while avoiding to fine-tune the LLM, SageCopilot consists of two pipelines – an offline pipeline collecting, generating and preparing a large number of demonstrations of possible user demands and the paired scripts for execution, while an online pipeline proposing LUI, NL2SQL, Text2Analyze and Text2Viz components to first identify, clarify and complete users’ intentions, and then to generate the accurate scripts for querying, analysis, and visualization purposes using the prepared demonstrations through ICL. Moreover, Chain-of-Thought(COT) and prompt-tuning strategies have been adopted to improve the effectiveness of the AutoAgent through multi-round conversations between SageCopilot and LLMs.

- To evaluate the performance of SageCopilot, we have carried extensive experiments to test the end-to-end correctness of script generation and execution for data query, analysis and visualization, using real-world traffics. Particularly, we use ablation studies to evaluate the contribution to the end-to-end correctness made by different strategies throughout the whole data science flow. Furthermore, case studies have been done to testify the accuracy of key components, including NL2SQL, Text2Analyze and Text2Viz in Appendix C. The comparisons with other prompt-based solutions, on top of the same set of LLMs, shows SageCopilot achieve better end-to-end performance while maintaining good user experiences. As part of industrial contribution, we also offer our review in designing and implementing SageCopilot and summarize the lessons learned.

2 FRAMEWORK DESIGN

As depicted in Figure 1, the SageCopilot framework presents a sophisticated dual-phase approach to managing and processing natural language queries against complex databases. In the offline phase, significant emphasis is placed on the preparation and enrichment of a robust data foundation that underpins the online operational stage. Through metadata semantic governance, the framework lays the groundwork for a deep understanding of the data structure, ensuring comprehensive query understanding and accurate SQL generation. The construction of a rich seed data repository, supplemented by effective data augmentation strategies, further strengthens the system’s ability to produce precise query responses.

Transitioning into the online phase, SageCopilot seamlessly shifts from data curation to real-time user engagement. The framework’s intent understanding and decision-making module utilizes the nuanced capabilities of LLM to interpret diverse user queries, cater to non-standard question phrasings, and provide contextually relevant visualizations. The system’s adeptness at memory recall and schema linking further streamlines the process, enabling efficient and relevant information retrieval. The integration of SQL generation with in-context prompting, coupled with the reflective oversight offered by the SQL reflection module, ensures the production of accurate and logically coherent database queries. These features, alongside the essential components of tool use and authentication, confirm that SageCopilot operates with precision, reliability, and security. Result presentation stands as the final touchpoint

in the user's interaction with SageCopilot, where complex data is transformed into accessible and actionable insights through text replies, visualizations, and forecast models. This not only enhances the user experience but also extends the framework's utility as a predictive tool for future trends and outcomes. The rest of this section will step into each phase for detailed design philosophies.

2.1 Offline Phase

The offline phase is devoted to the careful preparation of high-quality data that will be used in the online phase. This preparatory work involves four key activities: practicing metadata semantic governance, constructing a base of seed data, enhancing the dataset through data augmentation, and extracting information for schema linking. Once collated and refined, these datasets are embedded into a memory vector database which, in turn, equips the online phase with the necessary contextual data to meet specific user queries.

2.1.1 Schema Semantic Governance. Schema information is essential for data analysis tasks such as SQL writing, akin to the necessity for humans to understand table schematics. SageCopilot generates complex SQL statements aligned with human intentions by interpreting schema details. A detailed exposition of table metadata is indispensable for accurately matching user intent. For fields with enumerated values, a comprehensive description of the values stored in the database and their interpretations is required. In cases involving complex data types like structures and maps, a detailed account of key attributes and their meanings is crucial. This detailed metadata aids in understanding the complex relations between attributes, allowing for accurate data retrieval in response to queries. Additionally, SQL dialects should be annotated to ensure generated SQL adheres to the specific syntax required by the target system.

2.1.2 Seed Data Construction. The capacity of current LLMs in generating complex SQL autonomously is fairly restricted. We leverage the ICL ability of the LLMs to bolster the stability and accuracy of SQL generation by incorporating dynamic examples of <Query, SQL> pairs relevant to the user's current question. There are three strategies for constructing these seed data pairs. The first is populating <Query, SQL> pairs common in the business's everyday workflows, especially because certain queries routinely include bespoke business indicators. Without few-shot prompting or fine-tuning mechanisms, expecting large models to autonomously generate user-specific SQL is impractical. The second method is the SQL2NL technique, which facilitates the cold start process without imposing the requirement for users to supply <Query, SQL> pairs, particularly given the abundance of SQL in the enterprise data warehouse. In this context, natural language queries are generated by LLMs based on SQL and schema information, thereby constituting <Query, SQL> pairs. The final approach involves deriving <Query, SQL> pairs from user feedback, targeting instances where LLMs have failed to produce precise results. Here, human intervention is key to correcting inaccuracies.

2.1.3 Data Augmentation Techniques. SageCopilot incorporates two data augmentation strategies to enhance the performance and adaptability, whose ablation study detailed in Section 3.2.1.

- **Semantic-Preserving Augmentation** – the aim is to bolster the initial dataset, utilizing the LLM to transform a given query into

a new version that is semantically equivalent but syntactically varied, denoted as Query'.

- **Domain to NL&SQL Conversion** – this strategy addresses the generation of seed datasets for new topics through a combined effort of humans and the LLMs by taking domain-specific table schemas and having the LLMs generate relevant queries. These queries are then meticulously vetted by humans to select high-quality examples that support the SQL generation process in the online phase.

2.1.4 Schema Linking Information Extraction. We utilize the analysis of SQL syntax trees for multiple dialects to convert our dataset from <Query, SQL> format into a <Query, Tables, Fields> format. This transformation creates a direct linkage between user-generated queries and their associated database fields.

2.1.5 Memory Vector Database Integration. The memory vector database is pivotal in bridging the gap between offline preparation and online functionality. It encapsulates and consolidates data into a memory structure that unites both the original and augmented data pairs—including <Query, SQL, Tables, Fields> along with <Query', SQL, Tables, Fields>—to support robust and efficient data retrieval and management.

2.2 Online Phase

In the online phase, the system delivers a refined user experience by discerning user intent and generating precise SQL queries through a series of LLM-driven modules. The system begins with intent recognition, proceeding to link questions to database schemas, and then crafting SQL statements guided by user queries paired with similar examples. The SQL Reflection module improves accuracy by correcting errors in SQL queries. After authentication, the database runs the SQL and results are processed. The Result Generation module translates these results into textual analyses, avoiding visual complexity while still offering comprehensive insights. A Visualization component transforms data into charts. Additionally, a Forecast capability allows for the prediction of time-based data trends through simple, intuitive LLM-user interactions. Overall, the online phase is a streamlined sequence ensuring precise, user-aligned outputs, from query interpretation to actionable predictions.

2.2.1 Intent Understanding and Decision-Making. In authentic business environments, diverse user inquiries arise, including content beyond query parameters, topics outside the scope of the domain, incomplete queries, and follow-up questions that challenge continuity. To navigate these intricacies, an LLM-powered intent understanding and decision-making mechanism has been meticulously designed. This mechanism integrates four principal components: comprehensive intent assimilation, assessment of relevance, provision for direct query result visualization, and chart type discernment, all aligning towards heightened service precision for users.

This system harnesses user inquiries, analogous example queries, and predefined decision metrics to formulate elaborate prompts that optimize LLM responses. The comprehensive intent understanding component is calibrated to capture the essence of user requirements, addressing lacunae within multi-turn dialogues. The relevance assessment ascertains the pertinence of queries to the currently engaged topic, thereby filtering out unrelated or off-topic

issues. The element of direct plotting instruction examines if an inquiry can be addressed based on preceding outputs, thereby streamlining query processing. Lastly, chart type identification tailors visualization outputs to match user requests, ensuring congruency between visual reports and user intentions.

2.2.2 Multiple Recall & Schema Linking. In SageCopilot, thematic domain schemas involving 1 to N tables are depicted. The challenge in practical business situations is handling expansive tables within the confined contextual bandwidth of LLM prompts. This context constraint renders the integration of comprehensive schema details for all N tables into a solitary prompt impractical. Moreover, incorporating superfluous schema information can detrimentally impact model effectiveness. As a remedy, we introduce a schema linking module preceding SQL formulation to circumvent the complications of excess schema inputs.

Contemporary schema linking interventions [10, 15, 16] often revolve around the development of fresh models, necessitating substantial resources with potential limitations in domain-agnostic generalizability. Counteracting this, our method employs a preliminary multi-recall tactic to pinpoint tables aligning with the user's query intention. The LLM is then utilized to forge links between the user's question and the relevant tables and fields.

We execute the multi-recall approach through two principal channels: (1) a similarity-based recall that aligns user queries with table schemas, and (2) a homologous recall that harnesses pre-stored schema linking data from a memory vector database initialized during an offline phase. These distinct channels function autonomously, guaranteeing that the targeted table is suitably represented within the pool of candidates. After the table recall, Schema Linking particulars are deduced from the prescribed prompts as detailed in Figure 2. This dual-phase methodology fosters efficient SQL generation for voluminous tables within specific domains and streamlines the schema linking process, thereby enhancing the model's efficacy and generalization potential.

```
SCHEMA_LINKING_TEMPLATE = """According to the following [schema info] and
↳ [question], return the fields related to [question] in [schema info] in
↳ ```json``` format. The ```json``` format of the returned content is as
↳ follows. It is an array, and each item must contain TABLE and FIELD. Please
↳ replace the values of variables between $$ in the following example with
↳ reasonable content:
↳ ```json
↳ [{"TABLE": "table_1$", "FIELD": "[$field_1$, $field_2$]"}, {"TABLE": "table_2$",
↳ "FIELD": "[$field_1$, $field_2$]"}, ...]```
↳ [schema info]:{schema_info}
↳ {examples}
↳ [question]: {query}
↳ Return relevant fields: """
```

Figure 2: Schema linking prompt.

2.2.3 SQL Generation & In-Context Prompting. The objective of this module is to accurately generate SQL statements by fusing intent comprehension with schema linking, utilizing the in-context capabilities of LLMs. A significant technical challenge is crafting precise prompts with a restricted token input capacity. Typically, in-context examples in Figure 3 are comprised of <Query, SQL> pairs retrieved from a vector database via similarity search. Initially, an input query is converted into an embedding vector¹. This vector is then compared to the closest <Query, SQL> pair in the vector database by calculating the Inner Product (IP) distance, a ubiquitous

measure in similarity searching. However, token input size constraints mean that it is not feasible to include all pertinent examples in the prompt template. Conventionally, only the top-K in-context examples are embedded in the template. A problematic case has been identified (as depicted in Figure 4) where key examples may be omitted due to an unweighted IP similarity ranking, with significant terms like "closure rate" making negligible contributions to the overall similarity in comparison with other identical phrases. It has been observed that such high-ranking examples often lack the critical term "closure rate," potentially leading to incorrect SQL statement generation if the definition of "closure rate" is not present.

```
SQL_TEMPLATE = """Based on the following {dialect} table and examples, generate
↳ the corresponding SQL statement for the question. Return only one SQL
↳ statement after the question, and the format must be ```sql```."""
```

Figure 3: SQL generation prompt.




Figure 4: The miss-recalled example in similarity search.

To address this problem, we have introduced a slot feature extraction method combined with usual full-length query recall. The proposed hybrid recall strategy undertakes a two-step process: (1) employ the LLM to isolate the key terms and generate a shortened query to single out the most similar example, (2) merge this kernel example based on the key term with the array of results from the full-length query recall. This method yields more robust in-context examples than the conventional approach. Additionally, the in-context functionality of the LLM is leveraged to extract patterns and interpret information from contextual question examples, thus refining the accuracy of the generated SQL statements. The superiority of this hybrid strategy is further validated in an ablation study detailed in Section 3.2.4.

2.2.4 SQL Reflection. The SQL Reflection module is crafted to harness the exceptional proficiency of LLMs in amending flawed SQL expressions, significantly elevating SQL accuracy. Through detailed evaluation and comprehensive review, we scrutinize the veracity of SQL commands, delving into error etiologies encompassing verifications for table and column presence, as well as syntactic integrity. The SQL Reflection mechanism is activated solely upon the unequivocal identification of an anomaly within the SQL command. The configuration of the prompt is meticulously engineered, delineating not just the error typologies but also encompassing the SQL queries, explicit table schemas, and in-depth diagnostic evaluations of the discrepancies. Such a framework primes the LLM to concentrate on redressing the underlying SQL inaccuracies, thus garnering an accurate and meticulously directed correction process. The efficacy and practicability of this module have been corroborated through empirical studies detailed in Section 3.2.5. The data derived from these experiments solidifies the premise that this modality is not merely efficacious but also eminently viable.

2.2.5 Tool Use & Authentication. Our system, SageCopilot, accommodates SQL command execution across a spectrum of dialects, spanning MySQL, PostgreSQL, Flink SQL, Hive SQL and Spark SQL. It is noteworthy that queries executed via MySQL and PostgreSQL

¹<https://github.com/shibing624/text2vec>

can deliver output at the precision of milliseconds. Nevertheless, Spark/Hive/Flink SQL execution duration may range from a few minutes to hours, influenced by variables including data scale and the intricacy of the SQL query. An integral component of SageCopilot is its granular authentication mechanism, aligned with the zero-trust security framework. Prior to the execution of any SQL query, the system rigorously verifies whether users hold the necessary authorizations for access to the tables and columns referenced in the SQL statement within the allocated milieu. Progression to the execution phase is predicated on the assertive validation of such privileges. Conversely, if the user is found deficient in the required permissions, SageCopilot immediately communicates the execution impediment to the user, citing inadequate authorization. This vigilant and precise authentication protocol is in strict adherence to the tenets of the zero-trust model, bolstering security protocols and assuring that SQL execution transpires strictly within the ambit of sanctioned parameters.

2.2.6 Result Generation. Upon the retrieval of execution outcomes from the database engine, the result generation module commences its role in constructing the conclusive output for web-based applications. Demonstration of this process is evident in the lower right segment of Figure 1, wherein a diversely formatted report analogous to a portfolio is composed. Such a report encompasses textual analysis, visual representations through graphs and charts, and tabular data. Additionally, this phase may initiate further user interaction through the integration of predictive services and knowledge-driven analytical processes.

Text Analysis. Predominantly, the result generation module acting online employs a LLM agent for the transformation of execution results, articulated in markdown or JSON-esque structures, into textual discourse. The composition of the textual output is not limited to the portrayal of SQL execution outcomes but also encapsulates a synthesized overview and preliminary analysis of the data. The prompt utilized for guiding the LLM agent is formulated in Appendix D.1. In such an approach, the aspect of visualization has been deliberately decoupled, as a distinct module with an exclusive focus on graphical representation has been specifically crafted to augment the inherent capabilities of chart formation to their fullest extent without complication. It warrants attention that under certain circumstances, users may venture inquiries pertaining to key, yet uncomputed, metrics—take for instance the "closure rate", potentially non-existent within the current table schema. This presents a challenge as the LLM may find itself incapable of delivering the anticipated response. A remedy to this quandary is the activation of a knowledge enhancement mechanism, prompting the user for the precise formula necessitated for the computation of the "closure rate". Upon acquisition of the accurate or anticipated formula, the LLM is equipped to amalgamate it with the SQL execution findings, thereby generating an apt and tailored response.

Visualization. In order to refine front-end processing and deliver a more comprehensible presentation of graphical data, we utilize the capabilities of an LLM agent to generate bar, line, and pie chart code in Echarts-compatible JSON format. However, due to the broad range of outputs possible from the LLM agent, the produced visualizations may not consistently meet the user's precise needs. To

address this, we leverage the ICL of the LLM to adapt the prompt with examples that anticipate the user's preferred chart types. This method is instrumental in enhancing the standardization and precision of the LLM-generated outputs, thus better fulfilling user expectations. One such prompt is detailed in Appendix D.4.

Forecast. SageCopilot is equipped to conduct analyses and forecasts based on time-related data retrieved via SQL. We have explored various lightweight models suitable for temporal data analysis and forecasting, including Prophet. Leveraging the LLM's ability to interpret user's natural language and convert it into API calls for time series analysis models simplifies complex functions such as trend and periodicity estimation, as well as forecasting future events across different timescales. Due to constraints on length, we illustrate only a single real-world online case study of forecast using Prophet in Appendix D.6.

3 DEPLOYMENT AND EVALUATION

In the following section, we present the intricate details of deploying our novel SageCopilot within an industrial environment and carry out extensive experimental evaluations to assess the system's overall performance and the impact of each optimization technique. **Setups.** Figure 5 depicts the deployment of SageCopilot using a microservice architecture within a Kubernetes (K8s) cluster, with service configurations detailed in Table 6 in Appendix B. To enhance the system's stability and performance, SageCopilot strategically avoids direct connections between Python web services, such as the query service, and the MySQL database. Instead, a Java-based web service, namely the manager service, acts as an intermediary, managing front-end user requests and SQL database interactions. This design choice aims to enhance system throughput and reduce stability risks associated with direct Python-MySQL connections. Additionally, a MySQL database is implemented prior to employing operations within the vector database to maintain index uniqueness. Based on this foundational deployment, we perform a series of experiments to ascertain the efficiency and efficacy of the deployed system and to conduct an ablation study for each optimization strategy in SageCopilot.

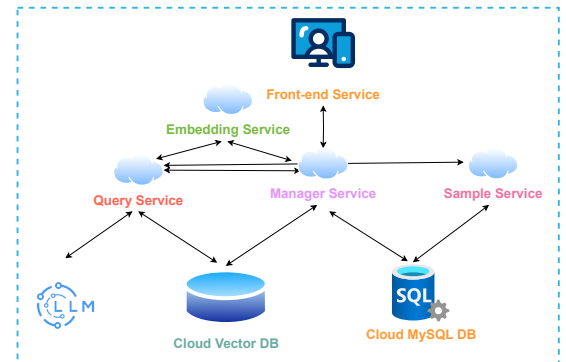


Figure 5: System deployment architecture

Datasets. The DuSQL dataset, frequently used to evaluate the accuracy of Text-to-SQL parsing across various databases, challenges models to adapt to new database schemas. The dataset contains 23,797 high-quality Chinese Text-SQL pairs over 200 distinct databases. In this investigation, we opted for 10 databases from

DuSQL to constitute the thematic domain in SageCopilot, following the offline phase described in Section 2.1. The dataset was segmented into 700 exemplar set entries and 215 test set entries.

We developed the **Real Traffic Dataset** from the data management platform of Baidu Inc. Owing to privacy concerns, the obtained data primarily consisted of redacted real tables. Utilizing these sanitized tables and through manual curation, we composed 6 thematic domains that include 10 data tables. The dataset was segmented into 212 exemplar set entries and 61 test set entries, with each entry comprising both the input queries and the corresponding SQL query statements.

To evaluate the difficulty of the Real Traffic Dataset and DuSQL datasets, we employed the NL2SQL evaluation methodology provided by the BIRD benchmark [11], which considers four dimensions: comprehension of the question, the requirement for external knowledge, complexity of the data, and complexity of SQL. Each dimension was rated on a scale from 1 to 3. Samples accumulating a total score under 4 were deemed easy, those between 5 and 6 were regarded as of medium difficulty, and samples with scores of 7 or higher were classified as challenging. Figures 6 illustrate the difficulty distribution across the datasets.

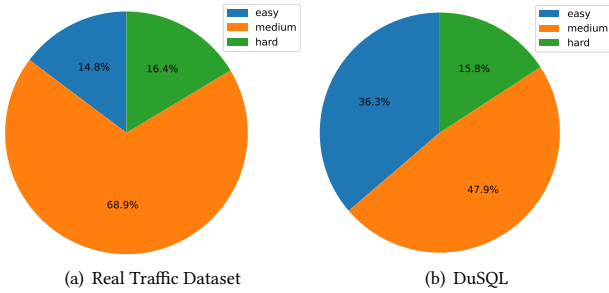


Figure 6: The difficulty of Real Traffic Dataset and DuSQL.

Metrics. To assess the performance of the proposed SageCopilot, we evaluate it from two perspectives: (1) the quality of SQLs generated in the SageCopilot pipeline, and (2) the quality of answers as an automated data analysis tool. For the first aspect, we adopt the mainstream NL2SQL metrics such as exact match, execution accuracy. We also explore one human-aligned metric as one supplementary indicator. For the second one, we cooperate a team of experts (trained with the domain knowledge) to rate the answers based on a panel of human-designed criteria. The detailed definition for each metric is illustrated as follows:

- **Exact Match (EM)**, namely the percentage of questions whose predicted SQL query is equivalent to the gold SQL query, is widely used in text-to-SQL tasks. Suppose that Y_i is the i -th ground truth SQL and \hat{Y}_i is the i -th predicted SQL, EM can be computed by $EM = [\sum_{i=1}^N \mathbb{1}(Y_i, \hat{Y}_i)]/N$.
- **Execution Accuracy (EX)**, namely the percentage of questions whose predicted SQL obtains the correct result, assumes that each SQL has an result. Considering the result V_i is executed by the Y_i and \hat{V}_i is executed by the \hat{Y}_i , EX can be computed by $EX = [\sum_{i=1}^N \mathbb{1}(V_i, \hat{V}_i)]/N$, where $\mathbb{1}(\cdot)$ is an indicator function, which can be represented as $\mathbb{1}(V, \hat{V}) = \begin{cases} 1, & V = \hat{V} \\ 0, & V \neq \hat{V} \end{cases}$.
- **Human-aligned Accuracy (HA)** is introduced to reconcile the discrepancies between traditional benchmark evaluation metrics

and actual human preferences. To illustrate in Figure 7, consider a case from the test set:

```
-- Question: Which grade has the most high schoolers?
-- pred:
SELECT grade, COUNT(*) AS num_highschoolers FROM Highschooler GROUP BY grade
ORDER BY num_highschoolers DESC LIMIT 1;
-- gold:
SELECT grade FROM Highschooler GROUP BY grade ORDER BY count(*) DESC LIMIT 1;
```

Figure 7: Badcase for EX metric.

In this instance, the query produced by the LLM (listed first) was identified as erroneous based on the established gold standard (listed second). Notably, the generated query includes an additional computed column indicating the count of students, presenting a more descriptive outcome. According to traditional Evaluation Accuracy (EX), such an informative response would be deemed incorrect. To address and potentially ameliorate this sort of misalignment, HA has been devised as a means to measure the extent to which generated SQL queries align with human-like judgment. Specifically, HA evaluates the suitability of a generated SQL query by executing both the forecasted and gold standard queries, and using their respective outputs to generate natural language responses to the input question. The accuracy of a generated query is then assessed by determining whether the natural language answer derived from the output of the predicted query is correct, taking into account the input question and the reference answer produced from the output of the gold standard query. The response acquired from the language model is binary: Yes or No.

- **Artificial Assessment (AA)** is a manual expert scoring index, composed of evaluations across multiple dimensions, including two text response indicators and three visual chart indicators. The text response indicators consist of data consistency and response richness, while the visual chart indicators consist of data consistency, display capability, and display rationality. A detailed description can be found in the scoring Table 7 in the appendix. We will also calculate the total score to demonstrate comprehensive performance assessment.

LLM Models. In the evaluation of fundamental NL2SQL task performance, ErnieBot’s capabilities were compared with other accessible open-source models, with focus on features such as fine-tuning and in-context learning proficiencies. As indicated in Table 1, ErnieBot demonstrates superior execution accuracy (EX), particularly in Few-Shot Prompting scenarios, affirming its robustness in this context. It is important to note that the ErnieBot series serves as the foundational Large Language Models (LLMs) for our system, SageCopilot. Furthermore, SageCopilot is designed to be adaptable, capable of augmenting the inherent functionalities of various other LLMs as alternatives, thereby extending the range of their native abilities.

Table 1: LLM base execution accuracy (EX) comparison.

	Erniebot	ChatGLM-6B	ChatGLM-6B	ChatGLM2-6B	Llama-Chinese-Alpaca
	Raw	Raw	Finetuned	Raw	Finetuned
Zero-Shot	25.0%	0.0%	19.0%	0.0%	12.0%
Few-Shot	69.0%	44.0%	50.0%	37.5%	56.0%

3.1 Overall Performance

In Table 2, we present the experimental results of the system’s overall online serving performance when leveraging the framework designated as SageCopilot. The assessed components of the experiment revolve around SQL query accuracy and the multifaceted

Artificial Assessment metric, which incorporates evaluations from both text and visual perspectives.

Key findings indicate that SageCopilot achieved moderate SQL Accuracy, with Exact Match (EM) at 45.6%, Execution Accuracy (EX) at 72.6%, highlighting correct results despite non-exact matches, and Human-aligned Accuracy (HA) slightly higher at 77.8%, showing competency in complex queries. The Artificial Assessment yielded a high score in Text Data Consistency (T1) at 3.26/4, but lower in Text Richness (T2) at 1.42/3 since we specify the brevity in the prompt 14. Visual Charts evaluation gave middling scores: Data Consistency (V1) at 1.34/2, Display Capability (V2) at 0.73/1, and Display Rationality (V3) at 1.24/2, suggesting reliable numerical data representation but areas to enhance in visual display and chart selection. The cumulative score for the Artificial Assessment (AA), denoted as SUM, adds these individual aspects to form an aggregate score. For SageCopilot, a SUM of 7.95 was obtained, showcasing the system's notable but imperfect capability in delivering both textually and visually coherent data representations. Considering multi-round querying as a more complex task than single-round querying due to the iterative nature of refining queries based on user feedback and maintaining context over multiple interactions, the performance measures reflected in AA demonstrate the challenging nature of multi-round querying.

Table 2: Overall performance of online serving with SageCopilot.

Dimension	SQL Accuracy			Artificial Assessment (avg. score)					
	EM	EX	HA	T1	T2	V1	V2	V3	SUM
Real Traffic Dataset	45.6%	72.6%	77.8%	3.26	1.42	1.34	0.73	1.24	7.95
multi-round	-	-	-	2.17	1.18	0.85	0.45	0.81	5.48

3.2 Ablation Test

3.2.1 Data augmentation. In the conducted ablation studies, we sought to evaluate the efficacy of our method, denominated as SageCopilot, through different data augmentation strategies. The experiments were categorized into four distinct sets: i) the zero-shot approach, devoid of any exemplar collection, relying solely on the language model's inherent capabilities; ii) the ER method, which leverages exemplar sets to invoke the model's in-context learning by recalling similar instances; iii) the ER+SA method—our proposed approach—where similar instances are retrieved from a semantically augmented exemplar set; iv) the ER+D2N approach, where the recall procedure is applied to an exemplar set enriched with domain-specific NL2SQL augmentations.

The outcomes, detailed in Table 3, indicate a marked enhancement in both EM and EX when the ER process is employed. Incremental improvements were further observed with our proposed ER+SA strategy, albeit to a lesser extent. However, the introduction of the domain to NL&SQL data augmentation (ER+D2N) did not culminate in any notable performance gains. The stagnation observed with the ER+D2N augmentation suggests that the similarity in distribution between the augmented and test samples was too great to provide a significant benefit. In contrast, the implementation of both example recall and semantic-preserving augmentation—the cornerstone techniques of SageCopilot—demonstrate effective enhancements to the model's performance.

3.2.2 SQL2NL. The SQL2NL mechanism substantively augments the automation of data augmentation and the optimization of tasks

Table 3: The comparison of data augmentation strategies.

dataset	Zero-shot		ER		ER+SA		ER+D2N	
	EM	EX	EM	EX	EM	EX	EM	EX
Industrial	0%	20.9%	45.6%	72.6%	51.6%	73.0%	45.6%	72.6%
DuSQL	0%	0%	11.5%	45.9%	16.4%	60.7%	9.8%	45.9%

post-system deployment. Implementing SQL2NL-enhanced examples improves the Execution (EX) score for SageCopilot from 56.2% to 81.3% within the chain supermarket domain, part of a broader Real Traffic Dataset, where the accuracy of SQL2NL achieves 92.0%. To validate SQL2NL's efficacy, the recall capability of the vector database was tested by mixing SQL2NL-generated examples with irrelevant ones within the domain. Starting with 16 accurate and executable SQL queries, a Language Model produced three related questions per query, yielding 48 SQL2NL-enhanced questions. These were introduced into vector databases with incremental additions of unrelated examples, as shown in Figure 8. The data bolstered by SQL2NL exhibited high congruity in aligning with the original questions, even amidst a burgeoning presence of extraneous data, thereby validating SQL2NL's efficacy as a potent mechanism for generating foundational seed data. The LLM prompt configuration is available in Appendix D.2.

3.2.3 Schema Linking. In the context of multiple recall, each retrieval channel should strive to maintain independence to ensure that the target table can appear in the candidate set. The evaluation mainly focuses on two aspects: (1) whether the target table appears in the candidate set; and (2) the desirability of the target table appearing towards the beginning of the candidate set. Figure 9 presents the results of four retrieval experiments conducted on 100 actual business tables, with most tables containing over 100 fields. The experimental results indicate that the retrieval strategies achieved recall of 50%, 83%, 83%, and 92% respectively. This suggests that the strategy based on direct table schema similarity performed notably better than others based on summarization of schema details, key words and the values of the key words. It's also important to consider the potential implications of the experimental results. The high recall of the direct table schema similarity strategy indicates its effectiveness in identifying relevant tables and columns for a given query. In contrast, the lower recall achieved by the summarization-based strategies may suggest limitations in capturing the nuanced details necessary for precise retrieval.




Figure 8: The recall rate of examples using SQL2NL.




Figure 9: Comparison of schema linking Strategies.

3.2.4 Slot Feature Extraction. In response to the observed challenge where a user's query regarding "close ratio" is obscured by extraneous language (e.g., in Appendix D.5), resulting in potential retrieval of non-germane instances by schema matching techniques, we introduce the Slot Feature Extraction (SFE) approach. This method's efficacy is rigorously evaluated through a direct comparison, utilizing EM and EX metrics, on a targeted subsection of our comprehensive real-traffic dataset. The selected subset comprises 81

samples belonging to a domain noted for its susceptibility due to the relatively brief nature of the key terms within broader textual contexts. Our empirical study, discussed in Section 2.2.3, reveals that when the Inner Product (IP) similarity metric is employed for example retrieval, there is a heightened probability of mismatches particularly when the key phrase is less prevalent within the data. Such circumstances are graphically depicted in Figure 4, highlighting how these mismatches can precipitate a significant decline in the recall rate of relevant in-context examples from this particular dataset sector.

The implementation of our method without SFE (SFE w/o) served as the baseline for the comparison. This baseline delivered an EX of 53.1% and an EM of 81.5%, revealing the inherent challenge in accurately matching short key phrases within the data. Upon integrating the SFE technique (SFE w/), we observed a notable improvement in performance, where EX improved by 7.0 percentage points, reaching 56.8%, and EM increased by 4.5 percentage points, achieving an 85.2% success rate. These enhancements underscore the significance of the SFE approach in boosting the system’s capability to discern and correctly retrieve pertinent instances based on key terms.

Table 4: Ablation study with slot feature extraction (SFE) strategy.

Plan	EM	EX
SFE (w/o)	53.1%	81.5%
SFE (w/)	56.8%	85.2%
DIFF	7.0%↑	4.5%↑

Table 5: Ablation study with SQL reflection strategy.

Plan	EM	EX
SQL Reflection (w/o)	15.0%	65.0%
SQL Reflection (w/)	10.0%	80.0%
DIFF	5.0%↓	15.0%↑

3.2.5 Reflection on SQL Generation. In our study, we conducted an ablation experiment to validate our SQL Reflection methodology by addressing diverse SQL errors such as syntax inconsistencies, references to non-existent tables, and omissions of requisite columns. Our dataset, composed of 20 distinct samples, employed Evaluation Metrics (EM) and Execution Accuracy (EX) as benchmarks for assessing our strategy’s efficacy. The SQL Reflection strategy, which operates without detailed SQL error annotations, was employed as the baseline under review and is summarized in Table 5. This baseline registered an EM score of 65% and an EX rate of 15%. However, upon the integration of explicit SQL error descriptions into the learning model, our records indicated a modest decline in EX by 5%, whilst EM exhibited a notable improvement of 15%. These findings substantiate the effectiveness of descriptive error integration in SQL query generation methodologies.

3.2.6 Effect of Miscellaneous Designs. The system enhances the performance of LLMs through two innovative forms of feedback: human-to-machine and machine-to-human. By correcting errors in SQL responses manually and feeding these corrections back into the system, human-to-machine feedback significantly improves system accuracy, as visually represented in Figure 21. Meanwhile, machine-to-human feedback recognizes the need for human intervention when the system’s responses may not be accurate. In such cases, the dialogue system seeks additional information from a human to clarify ambiguous queries. This ensures responses are precise and tailored to the user’s intended meaning, creating a dynamic, iterative loop that continuously refines the system’s performance and user experience. We show the supplementary results in Appendix E.

3.3 Lessons Learned and Discussions

In this section, we outlined the deployment and experimental evaluation of our advanced system, SageCopilot, in an industrial setting. Our exploration covered the system architecture, datasets, performance metrics, and the impact of design enhancements. Results showed that while not every SQL query was an exact match (EM), correct results (EX) were frequently produced, indicating that the system can tolerate some structural variances. The overall assessment confirmed the system’s consistency in generating text responses and charts, though it suggested that analysis depth and chart selection could be improved. Ablation studies revealed that methods like example recall and schema similarity significantly affected system performance, with SQL2NL and Slot Feature Extraction improving EX scores by aiding in accuracy. Evaluating SQL generation strategies also demonstrated the benefits of incorporating error descriptions for better EM rates. Overall, the evaluation highlighted effectiveness of SageCopilot in SQL generation and data analysis, as well as the significance of human feedback mechanisms in refining precision, thereby providing insights into enhancing LLM systems in complex industrial environments.

In response to the limitations in LLM capabilities and the complexity of SQL data within the industrial sector, we have developed an array of engineering solutions and learned lessons from realistic deployment. **Lesson 1:** Confronting the issue of restricted token input length for LLM (that make it impossible to put all schemes and attribute descriptions into one prompt), our research has adopts an innovative “multiple recall and schema linking” paradigm. This technique facilitates the association of user inquiries to expansive datasets, including numerous tables and columns. **Lesson 2:** In scenarios where SQL queries are characterized by complexity and include shared components, an advanced strategy was employed: the restructuring of original SQL queries through the creation of views. This strategic alteration is cataloged in Appendix D.7 and has resulted in a significant enhancement of end-to-end query accuracy, approximately by 50% in our experiments. **Lesson 3:** The end-to-end correctness requires not only self-reflection, but also the continuous collection of demonstrations for ICL, as feedback from the online phase, to improve the system accuracy.

4 CONCLUSION

In summary, this paper introduces SageCopilot, an advanced, industry-grade system that offers automated data science pipeline by effectively integrating LUIs, AutoAgents, databases, data visualizers and LLMs. It delivers an end-to-end solution capable of handling natural language instructions on querying, analysis, and visualization tasks with minimal human intervention. SageCopilot incorporates a two-phase design – an online component refining users’ inputs into executable scripts through In-Context Learning (ICL) and running the scripts for results reporting & visualization, and an offline preparing demonstrations requested by ICL in the online phase. Various prompt-tuning strategies have been used to augment SageCopilot for enhanced performance. Our rigorous evaluation across real-world scenarios demonstrates the advantages of SageCopilot in generating/executing scripts and offering results with visualization. Open issues and the lesson learned have been discussed as part of our contribution from industry perspectives.

REFERENCES

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altmenschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774* (2023).
- [2] Syed Mohd Ali, Noopur Gupta, Gopal Krishna Nayak, and Rakesh Kumar Lenka. 2016. Big data visualization: Tools and challenges. In *2016 2nd International conference on contemporary computing and informatics (IC3I)*. IEEE, 656–660.
- [3] Naihao Deng, Yulong Chen, and Yue Zhang. 2022. Recent Advances in Text-to-SQL: A Survey of What We Have and What We Expect. In *Proceedings of the 29th International Conference on Computational Linguistics*. 2166–2187.
- [4] Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Zhiyong Wu, Baobao Chang, Xu Sun, Jingjing Xu, and Zhifang Sui. 2022. A survey for in-context learning. *arXiv preprint arXiv:2301.00234* (2022).
- [5] Xin Luna Dong, Seungwhan Moon, Yifan Ethan Xu, Kshitiz Malik, and Zhou Yu. 2023. Towards next-generation intelligent assistants leveraging llm techniques. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 5792–5793.
- [6] Yujian Gan, Xinyun Chen, Jinxia Xie, Matthew Purver, John R Woodward, John Drake, and Qiaofu Zhang. 2021. Natural SQL: Making SQL Easier to Infer from Natural Language Specifications. In *Findings of the Association for Computational Linguistics: EMNLP 2021*. 2030–2042.
- [7] Mike Gualtieri. 2017. *The Forrester Wave: Natural Language Generation For Data Science, Q4 2017*. Forrester Research.
- [8] Vincent C Hu, David Ferraiolo, Rick Kuhn, Arthur R Friedman, Alan J Lang, Margaret M Cogdell, Adam Schnitzer, Kenneth Sandlin, Robert Miller, Karen Scarfone, et al. 2013. Guide to attribute based access control (abac) definition and considerations (draft). *NIST special publication* 800, 162 (2013), 1–54.
- [9] Md Saiful Islam, Chengfei Liu, and Rui Zhou. 2012. On modeling query refinement by capturing user intent through feedback. In *Proceedings of the Twenty-Third Australasian Database Conference-Volume 124*. 11–20.
- [10] Wenqiang Lei, Weixin Wang, Zhixin Ma, Tian Gan, Wei Lu, Min-Yen Kan, and Tat-Seng Chua. 2020. Re-examining the Role of Schema Linking in Text-to-SQL. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. 6943–6954.
- [11] Jinyang Li, Binyuan Hui, Ge Qu, Binhua Li, Jiaxi Yang, Bowen Li, Bailin Wang, Bowen Qin, Rongyu Cao, Ruiying Geng, Nan Huo, Chenhao Ma, Kevin C. C. Chang, Fei Huang, Reynold Cheng, and Yongbin Li. 2023. Can LLM Already Serve as A Database Interface? A Big Bench for Large-Scale Database Grounded Text-to-SQLs. *arXiv:2305.03111 [cs.CL]*
- [12] Yong Lin, Lu Tan, Hangyu Lin, Zeming Zheng, Renjie Pi, Jipeng Zhang, Shizhe Diao, Haoxiang Wang, Han Zhao, Yuan Yao, et al. 2023. Speciality vs generality: An empirical study on catastrophic forgetting in fine-tuning foundation models. *arXiv preprint arXiv:2309.06256* (2023).
- [13] Russell A Poldrack, Thomas Lu, and Gašper Beguš. 2023. AI-assisted coding: Experiments with GPT-4. *arXiv preprint arXiv:2304.13187* (2023).
- [14] Amine Rebei. 2023. Fine-Tuning Language Models for Context-Specific SQL Query Generation. *arXiv preprint arXiv:2312.02251* (2023).
- [15] Bailin Wang, Richard Shin, Xiaodong Liu, Oleksandr Polozov, and Matthew Richardson. 2019. Rat-sql: Relation-aware schema encoding and linking for text-to-sql parsers. *arXiv preprint arXiv:1911.04942* (2019).
- [16] Lihan Wang, Bowen Qin, Binyuan Hui, Bowen Li, Min Yang, Bailin Wang, Binhua Li, Jian Sun, Fei Huang, Luo Si, et al. 2022. Proton: Probing schema linking information from pre-trained language models for text-to-sql parsing. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. 1889–1898.
- [17] Lijie Wang, Ao Zhang, Kun Wu, Ke Sun, Zhenghua Li, Hua Wu, Min Zhang, and Haifeng Wang. 2020. DuSQL: A large-scale and pragmatic Chinese text-to-SQL dataset. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. 6923–6935.
- [18] Tristan Webb and Simon Ducott. 2020. Learning to Prompt for Continual Learning. In *Continual Learning Workshop, NeurIPS*.
- [19] Haoyi Xiong, Jiang Bian, Sijia Yang, Xiaofei Zhang, Linghe Kong, and Daqing Zhang. 2023. Natural Language based Context Modeling and Reasoning with LLMs: A Tutorial. *arXiv preprint arXiv:2309.15074* (2023).
- [20] Xuan Xu, Chang Liu, and Dawn Song. 2017. SQLNet: Generating Structured Queries From Natural Language Without Reinforcement Learning. *arXiv preprint arXiv:1711.04436* (2017).
- [21] Victor Zhong, Caiming Xiong, and Richard Socher. 2017. Seq2SQL: Generating Structured Queries from Natural Language using Reinforcement Learning. *arXiv preprint arXiv:1709.00103* (2017).

A RELATED WORK

The quest to bridge the gap between natural language and database querying has led to the emergence of the NL2SQL field, which

seeks to translate natural language questions into executable SQL queries. The pioneering works of Zhong et al. [21] with Seq2SQL and Xu et al. [20] with SQLNet laid the foundation for subsequent advancements, integrating reinforcement learning and sequence-to-sequence models to adapt to the nuanced complexity of natural language. The integration of language models as agents, such as through LangChain, underscores a next-generation approach to human-computer interaction. Modern implementations, as described by Shuster et al. [5], showcase the efficiency of these agents in not only understanding but also executing language-based tasks within software environments. Large language models (LLMs), including GPT variants, have demonstrated considerable effectiveness in NL2SQL applications through fine-tuning. Papers like that of Wang et al. [14] detail the intricate prompt engineering required to guide these models toward generating syntactically and semantically accurate SQL queries. The importance of prompt engineering within the human-machine collaboration framework cannot be overstated. As investigated by Webb et al. [18], well-engineered prompts drastically enhance a model’s performance, acting as a form of ‘soft’ programming that specifies the task at hand without the need for hard-coded algorithms.

Furthermore, the field of Natural Language Interfaces for Data Science promotes an accessible environment for data analysis, as highlighted by Gualtieri’s work [7]. Such interfaces are increasingly sought after for their ability to democratize data science, enabling users with limited technical background to harness complex data analytics through conversational engagement. In the compilation of this literature, it is evident that the maturation of NL2SQL technologies is closely entwined with the evolution of LLMs, agent frameworks, and methodologies in prompt engineering. Amidst this synergy, the overarching goal remains to simplify and streamline the end-user experience in interacting with databases and performing data science tasks.

B SYSTEM CONFIGURATION [TABLE 6]

C MAIN FLOW

C.1 Intent Understanding and Decision-Making

In practical business settings, users often engage in multi-turn dialogues, posing follow-up questions subsequent to an initial inquiry. These successive questions, however, are frequently characterized by missing context or complete departure from the original topic. Mishandling such queries as definitive intents can result in erroneous outcomes and needless processing time. For instance, following an initial question about authorization request counts in October ’22, a user may ask, “What about June?” or prompt for visual representations like “Could you draw a bar chart?” or pose unrelated questions such as “How’s the weather today?”. To navigate these multifaceted interactions, a systematic approach to intent understanding and decision-making is crucial. This involves methods for comprehensive interpretation to supplement incomplete follow-ups, the ability to directly generate visualizations from query results, assistance in chart type selection for optimal data portrayal, and relevance filtering to appropriately address or dismiss off-topic queries.

Table 6: Overview of the system deployment

Service	Front-end	Manager	Sample	Query	Embedding
Description	Responsible for the front-end page requests.	Task scheduling management to cope with LLM API QPS limitations; Theme domain management.	Provide a routine data augmentation service.	Interactions with LLM and vector db based on the LangChain.	Turn the Query into a vector.
Number of Pods	1	2	1	2	1
CPU Cores(vCPU)	3	4	4	8	6
Memory(Gi)	12	8	8	16	16
Storage(Gi)	70	70	70	170	170
Language	JavaScript	Java	Java	Python	Python
Framework	React	Spring Boot	Spring Boot	FastAPI	FastAPI

Table 7: Scoring system for the AA metrics.

Dimension	Text Reply (T)		Visual Chart (V)		
	Data Consistency (T1)	Richness (T2)	Data Consistency (V1)	Display Capability (V2)	Display Rationality (V3)
Description	Consistency and rationality of numerical data within the response.	Whether the text reply include additional information beyond a direct statement, e.g., analysis, summary	Consistency of numerical data between the table and the chart.	Whether the chart is displayable.	Whether the chart's type is the best representation for the current question.
Criteria	Scoring (0-4): 0: Completely incorrect data 1: Incorrect data or irrelevant numbers 2: Correct but includes irrelevant numbers 3: Correct data, irrational expression 4: Both data and expression are rational	Scoring (0-3): 0: No additional information 1: Incorrect additional information 2: Accurate but simplistic additional info 3: Diverse and accurate additional info	Scoring (0-2): 0: Inconsistent 1: Partially consistent 2: Fully consistent	Scoring (0-1): 0: Not displayable 1: Displayable	Scoring (0-2): 0: Irrational (e.g., trends as pie charts) 1: Moderate (e.g., trends as bar charts) 2: Rational (e.g., trends as line charts)

C.2 SQL Generation

Delving into the industry realm, consider a user question such as "What is the trend in employee [Zhou Hui]'s monthly sales in [the second half of 2022]?" Initially, we extract the pertinent schema information from the domain of the user's query, analogous to the procedures for a chain supermarket domain. We then compute the similarity between the user's question and data vectors in the vector database to select the most suitable examples containing <Query, SQL> pairs, which is shown in Figure 10. These examples serve as contextual aid in formulating a precise SQL statement.

```
--Query1: What is the trend in monthly sales for [Zhou Hui] employees in [2021]?
--SQL1:
SELECT name, month, sales_amount
FROM employee
WHERE name = "Zhou Hui"
AND employee.year = 2021
ORDER BY month ASC;

--Query2: How have employee [Zhao Li]'s monthly sales changed over the last year?
--SQL2:
SELECT name, year, month, sales_amount
FROM employee
WHERE year = YEAR(CURDATE())-1
AND name = "Zhao Li"
GROUP BY month
ORDER BY month ASC;
```

Figure 10: In-context examples.

Utilizing the in-context learning capability of the LLM agent, we integrate the schema information with the exemplary queries and responses, alongside the original user inquiry, to generate an accurate SQL statement that addresses the user's needs, as shown in Figure 11.

```
SELECT name, month, sales_amount
FROM employee
WHERE name = "Zhou Hui"
AND (month BETWEEN 7 AND 12)
AND employee.year = 2022
ORDER BY month ASC;
```

Figure 11: The generated SQL.

C.3 Chart Generation

Albeit the generation of an accurate SQL statement, presenting the resulting data to users in an intuitive format remains a challenge.

Zhou Hui's monthly sales trends in 2021



Figure 12: An example of generated line chart.

Top 10 most profitable store products in 2021




Figure 13: An example of generated bar chart.

To bolster user experience, two chart generation methods were employed, leveraging the in-context capabilities of the LLM agent and external knowledge bases.

The first method involves generating complete eCharts JSON code. For instance, for the real user question concerning the sales trend of employee [Zhou Hui] in [2021], the LLM agent determines that a line chart would best illustrate the desired trend. The final eCharts code, which includes additional interactive features like a title, legend, and tooltips, is crafted through a prompt, with the result displayed in Figure 12.

The second method applies rule normalization to expedite the LLM agent's processing time and diminish variation in personalized scenarios. We introduced a simplified prompt structure for constructing basic two-dimensional charts. This is exemplified in the query about the highest total profits among products for March 2022, where we translate SQL results into a list before extracting column names for prompt incorporation, as outlined in Appendix D.3. The immediate inference is that product names populate the x-axis and total profits the y-axis, with a bar chart effectively emphasizing the ranking. This refined process enables prompt, adaptable insertion of query results into tailored chart templates, evidenced by the output in Figure 13.

C.4 Analysis and Summary Capability

While general LLMs are adept with vast textual information, their proficiency in custom and specialized vertical knowledge domains can be limited. To address specialized queries more empathetically and accurately, we have developed a pipeline incorporating prompt engineering and external knowledge bases. For example, in analyzing and predicting time-series data, the SageCopilot begins by consulting an external knowledge base for relevant insights into the user's issue. It then assimilates this information, grasps the user's underlying intent, and proceeds with the generation and execution of the corresponding SQL statements to gather the relevant time-series data. It's necessary to call a time-series prediction model for further analysis, with the LLMs for accessing the prediction model, referencing pertinent API documentation from the knowledge base. It then delivers insightful analyses to the user, including trends, periodic behavior, and outlier detection.

D THE EXAMPLE OF PROMPTS AND CASES

In this section, we disclose the prompts and actual cases employed in the development of SageCopilot.

D.1 Prompt: Text Analysis.

```
TEXT_ANALYSIS_TEMPLATE = """
Question: {query}
Database Query Result: {result}
Based on the provided question and the results from the database query, please
↳ describe the results line by line using appropriate language. The
↳ description should cover the full results and provide a concise conclusion,
↳ focusing solely on the core issue. There is no need to display any charts,
↳ but if the results are related to time, please infer the relevant time range
↳ retrospectively. If the query results are empty, return a suitable
↳ description without making any assumptions.
"""
```

Figure 14: Text analysis prompt.

D.2 intregation.

```
SQL2NL_TEMPLATE = """You are now required to generate user questions based on
↳ table information and SQL statements: {table_info}
Generate 3 instances of user questions based on table information and SQL
↳ statements:
[SQL Statements]: {sql}
[Generated Questions]: """
```

Figure 15: SQL2NL prompt.

D.3 Prompt: Axis Checker.

```
AXIS_CHECKER = """Based on the problem and chart description analysis, select the
↳ horizontal and vertical coordinates from {column_name}
Keep the original information in column_name
Chart types: line, bar, pie
Based on the table description analysis, select only any one type from the chart
↳ types.
Only returns a ```json``` format code
The structure only contains
{{
  "xAxis": "",
  "yAxis": "",
  "type": ""
}}
Table description: {column_desc}"""
```

Figure 16: Axis checking prompt.

D.4 Prompt: Chart Generation. [Figure 17].

```
CHART_GENERATION_TEMPLATE = """
Example:
Question: In May 23, what are the different types of application single numbers
↳ for X?
Chart_type: bar
Answer: [{"process_type": "2", "num": "1145"}], [{"process_type": "5", "num":
↳ "406"}], [{"process_type": "1", "num": "505"}], [{"process_type": "4", "num":
↳ "596"}], [{"process_type": "0", "num": "84"}], [{"process_type": "7", "num":
↳ "33"}], [{"process_type": "6", "num": "19"}]
Output:
The answer has seven sets of data, the chart type is "bar", and a JSON needs to
↳ be output.
```json
{{
 "xAxis": {{
 "type": "category",
 "name": "Application form type",
 "data": ["2", "5", "1", "4", "0", "7", "6"]
 }},
 "yAxis": {{
 "type": "value",
 "name": "Application Form quant"
 }},
 "series": [
 {{
 "data": ["1145", "406", "505", "596", "84", "33", "19"],
 "name": "Application Form of X for May 23",
 "type": "bar"
 }}
]
}}
```
Question: {query}
Chart_type: {chart_type}
Answer: {sql_result}
I want you to act like an eCharts builder, an expert in creating meaningful
↳ charts.
Completely refer to the above [Example], analyze the data in the answer, and
↳ return an ECharts configuration option to present the data results
Output: """
```

Figure 17: Chart generation prompt.

D.5 Case: Key Word Missing in Generated SQL.

```
-- Question: What is the closure rate of online issues for the Intelligent Office
↳ Platform Department in August 2023?
-- pred:
SELECT
SUM(
CASE
WHEN closed_time IS NOT NULL
AND closed_time > begin_time THEN 1
ELSE 0
END
) AS closed_count, ...
-- gold:
SELECT
CONCAT (
ROUND(
COUNT(IF (status IN ('closed', 'finished', 'published'), 1, NULL)) /
↳ COUNT(*) * 100,
2
),
'%'
) AS close_ratio FROM...
```

Figure 18: The missed key word.

D.6 Case: Prediction with Prophet [Figure 19].

The Prophet² forecasting model is known for its intuitive approach to time series data by focusing on components like trend, seasonality, and holidays. Integrating Prophet with LLMs represents a novel area of study, wherein the strengths of both are leveraged for enhanced forecasting and analytical capabilities. Cooperation between Prophet and SageCopilot can manifest in data preprocessing and post-analysis. LLMs in SageCopilot can assist in curating and interpreting relevant textual data to refine Prophet's inputs and potentially expand its external regressors. Post-prediction, LLMs

²<https://github.com/facebook/prophet>

can translate the numerical outputs into natural language, making the insights more accessible for decision-makers. Additionally, LLMs can support interactive query interfaces, where they convey Prophet's forecasts through conversational AI, enabling users to discuss and digest future trends with ease. While Prophet handles the quantitative predictions, LLMs can enrich the user experience by providing contextual understanding and narrative explanations. The synergy between Prophet and SageCopilot does not involve direct computational collaboration but rather a complementary integration where the former provides structured forecasts and the latter enhances the interpretability and application of those forecasts.

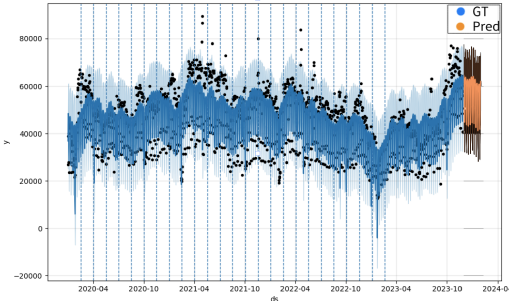


Figure 19: A forecast result guided by SageCopilot.

D.7 Case: View Creation to Simplify SQL.

An SQL view is essentially a virtual table created by a query, which provides a way to encapsulate complex SQL operations into a simpler form, acting much like a real table with rows and columns. Views offer various advantages, including simplifying database interactions for users by hiding the complexity of the underlying data operations, enhancing security by limiting data exposure, offering a level of abstraction from database schema changes, and creating a logical representation of data that corresponds with business requirements and user roles. These benefits make views a powerful feature for efficient database management. An example is shown as follows.

```
CREATE VIEW table_view
AS
SELECT get_json_object(d2, '$.field1') AS field1
, get_json_object(d2, '$.field2') AS field2
, get_json_object(d2, '$.field3') AS field3
, get_json_object(d2, '$.field4') AS field4
, get_json_object(d2, '$.field5') AS field5
, get_json_object(d2, '$.field6') AS field6, stat_date
, d2, type
FROM table_a
WHERE ((get_json_object(d2, '$.field1') != 'value1'
AND get_json_object(d2, '$.field2') NOT IN ('id1', 'id2',
↵ 'id3'))
OR (get_json_object(d2, '$.field2') IN ('id1', 'id2', 'id3')
AND (get_json_object(d2, '$.field3') != 0
OR get_json_object(d2, '$.field4') IS NOT NULL
OR get_json_object(d2, '$.field6') = '1'))
OR (get_json_object(d2, '$.field5') = 'value2'
AND get_json_object(d2, '$.field6') = '1'))
AND type = 'type1';
```

Figure 20: View creation to simplify SQL.

E SUPPLEMENTARY EXPERIMENTAL RESULTS

The efficacy of two additional enhancements, which significantly improve both the effectiveness and the user experience of our system, is summarized below.

E.1 Human-to-Machine Feedback

Recognizing the limitations and variability in outputs from Large Language Models (LLMs), it is imperative to establish a feedback loop from humans to machines. This allows for improved precision through active adjustments. In particular, when the system encounters an erroneous case, the incorrect SQL generated in response to a query is manually rectified and incorporated into the memory base to immediately enhance system performance. As depicted in Figure 21, implementing this human-to-machine feedback mechanism showcases a marked advancement in output quality.




Figure 21: The effect of human-to-machine feedback.




Figure 22: An example of machine-to-human feedback.

E.2 Machine-to-Human Feedback

Traditionally, LLMs deliver responses to queries without regard for result accuracy, which can be problematic. To rectify this, our system implements a machine-to-human feedback process. As illustrated in Figure 22, when there is uncertainty in providing an accurate response, the system solicits human intervention. The response is then formulated using the system's capacity for multi-turn dialogue comprehension, but only after receiving a question that has been clarified by a human operator. This is operationalized by defining a set of clarification parameters alongside acceptable values. If a query involves a clarification parameter and the inferred value does not align with the anticipated range, a request for further clarification is initiated. This process ensures that responses are not only accurate but are also reflective of the user's true intentions, optimizing the system's reliability through iterative machine-to-human feedback.

In the realm of human-assisted feedback, we demonstrated the substantial gain from a human-to-machine feedback mechanism in rectifying erroneous SQL cases, while machine-to-human feedback processes addressed accuracy in responses, ensuring queries were clarified by human intervention when necessary.