

pyBregMan: A Python library for Bregman Manifolds*

Frank Nielsen[†]

Alexander Soen[‡]

Abstract

A *Bregman manifold* is a synonym for a dually flat space in information geometry which admits as a canonical divergence a Bregman divergence. Bregman manifolds are induced by smooth strictly convex functions like the cumulant or partition functions of regular exponential families, the negative entropy of mixture families, or the characteristic functions of regular cones just to list a few such convex Bregman generators. We describe the design of `pyBregMan`, a library which implements generic operations on Bregman manifolds and instantiate several common Bregman manifolds used in information sciences. At the core of the library is the notion of Legendre-Fenchel duality inducing a canonical pair of dual potential functions and dual Bregman divergences. The library also implements the Fisher-Rao manifolds of categorical/multinomial distributions and multivariate normal distributions. To demonstrate the use of the `pyBregMan` kernel manipulating those Bregman and Fisher-Rao manifolds, the library also provides several core algorithms for various applications in statistics, machine learning, information fusion, and so on.

Key words: Dually flat space; Hessian manifold; Fisher-Rao manifold; geodesics; Legendre-Fenchel transform; duality; auto-differentiation; clustering; Jensen divergence; Bregman divergence; Jensen-Shannon centroid; Chernoff information; multivariate normal manifolds: categorical manifolds

Contents

1	Getting started with <code>pyBregMan</code>	2
2	A short introduction to Bregman and Fisher-Rao manifolds	5
2.1	Bregman manifolds: A quick review	5
2.2	Fisher-Rao manifolds	6
2.3	Divergence-based information geometry	7
2.4	Purposes of the library	7
3	Structure of the library	8
3.1	Primitives of the Library	9
3.1.1	Coordinates and Points	9
3.1.2	Bregman Manifolds	9
3.1.3	Geodesics and Bisectors	10
3.2	Additional Geometric Objects	11

*<https://franknielsen.github.io/pyBregMan/>

[†]Sony Computer Science Laboratories Inc., Tokyo, Japan.

[‡]Australian National University, Canberra, Australia; RIKEN AIP, Tokyo, Japan.

3.3	Application Manifolds	13
3.4	Visualization	13
4	Some examples of Hessian Fisher-Rao statistical models	14
4.1	Positive Semi-definite Matrices: Geometric Matrix Means	14
4.2	Categorical Distributions: Intensity Centroids	16
4.3	Gaussian Distributions: Chernoff Point / Information	19
5	Extending pyBregMan	22
5.1	Defining Generators using auto-differentiation	22
5.2	Defining the Manifold	23
5.3	Defining Geometric Objects	24
A	Full Class Diagram	27

1 Getting started with pyBregMan

Let us build, step-by-step, a simple example to demonstrate usage of the `pyBregMan` library (Python library for Bregman Manifolds):

- ① we create the Bregman and Fisher-Rao manifold structures for the family of bivariate normal distributions (namely, an exponential family manifold and a Fisher-Rao manifold);
- ② we calculate the Kullback-Leibler divergence between two bivariate normal distributions;
- ③ we compute the left-sided Kullback-Leibler, right-sided Kullback-Leibler, Bhattacharyya and Fisher-Rao centroids [33, 29] (Riemannian geodesic midpoint); and
- ④ we visualize those bivariate normal centroids (Figure 1).

The basic usage of `pyBregMan` consists of defining a specific Bregman manifold, defining points on said manifold, and then defining additional geometric objects on the manifold.

To install the library via `pip3`, execute the command:

```
pip3 install pyBregMan
```

Alternatively, the library can be installed from `GitHub` as follows:

```
git clone https://github.com/alexandersoen/pyBregMan.git
cd pyBregMan
pip3 install .
```

In the following example, we first define a the manifold of bivariate normal distributions. The following code illustrates the construction of a bivariate Gaussian Bregman manifold (see §2 for a quick review of the theory of Bregman manifolds).

```
import numpy as np

from bregman.application.distribution.exponential_family.gaussian import
    GaussianManifold
from bregman.base import LAMBDA_COORDS, DualCoords, Point

# Define Bivariate Normal Manifold
```

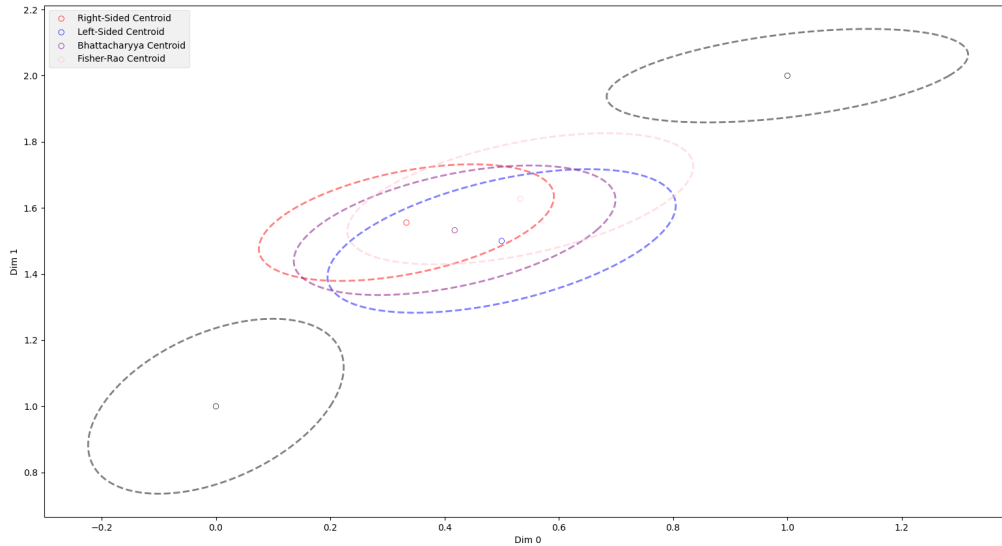


Figure 1: Left-sided Kullback-Leibler, right-sided Kullback-Leibler, Bhattacharyya and Fisher-Rao centroids on the bivariate normal manifold.

```

manifold = GaussianManifold(input_dimension=2)

# Define data
to_vector = lambda mu, sigma: np.concatenate([mu, sigma.flatten()])
mu_1, sigma_1 = np.array([0.0, 1.0]), np.array([[1.0, 0.5], [0.5, 2.0]])
mu_2, sigma_2 = np.array([1.0, 2.0]), np.array([[2.0, 1.0], [1.0, 1.0]])

point_1 = Point(LAMBDA_COORDS, to_vector(mu_1, sigma_1))
point_2 = Point(LAMBDA_COORDS, to_vector(mu_2, sigma_2))

```

Here the manifold bivariate normal distributions is defined via `GaussianManifold`. In `pyBregMan`, we provide a variety of different manifolds used in information sciences. These can be found under the `bregman.application` submodule. To define data on the manifold, one needs to use the `Point` primitive. Here data is annotated with a coordinate type `LAMBDA_COORDS` (see [30]), which for Gaussian distributions corresponds to the typical mean μ and covariance matrix Σ of Gaussians represented as a vector.

Simple calculations for (exponential family) distributions can be directly called from the manifold. For instance, the Kullback-Leibler divergence between the points can be called as follows:

```

# KL divergence can be calculated
kl = manifold.kl_divergence(point_1, point_2)
rkl = manifold.kl_divergence(point_2, point_1)

print("KL(point_1 || point_2):", kl)
print("KL(point_2 || point_1):", rkl)

```

```
# >>> KL(point_1 || point_2): 0.9940936082534253
# >>> KL(point_2 || point_1): 1.2201921060322891
```

Additional geometric objects and calculations can be called by external submodules. For instance, various barycenter (weighted centroid) calculations can be found in `bregman.barycenter`. Additionally, manifold specific geometric objects can be found in their specific submodule, see for instance `FisherRaoKobayashiGeodesic`. Here we are utilizing the fact that the Fisher-Rao centroid between two points is the midpoint of the corresponding Fisher-Rao geodesic [10, 24].

```
from bregman.barycenter.bregman import BregmanBarycenter,
    SkewBurbeaRaoBarycenter
from bregman.application.distribution.exponential_family.gaussian.geodesic
    import FisherRaoKobayashiGeodesic

# We can define and calculate centroids
theta_barycenter = BregmanBarycenter(manifold, DualCoords.THETA)
eta_barycenter = BregmanBarycenter(manifold, DualCoords.ETA)
br_barycenter = SkewBurbeaRaoBarycenter(manifold)
dbr_barycenter = SkewBurbeaRaoBarycenter(manifold, DualCoords.ETA)

theta_centroid = theta_barycenter([point_1, point_2])
eta_centroid = eta_barycenter([point_1, point_2])
br_centroid = br_barycenter([point_1, point_2])
dbr_centroid = dbr_barycenter([point_1, point_2])

# Mid point of Fisher-Rao Geodesic is its corresponding centroid of two
# points
fr_geodesic = FisherRaoKobayashiGeodesic(manifold, point_1, point_2)
fr_centroid = fr_geodesic(t=0.5)

print("Right-Sided Centroid:", manifold.convert_to_display(theta_centroid)
      )
print("Left-Sided Centroid:", manifold.convert_to_display(eta_centroid))
print("Bhattacharyya Centroid:", manifold.convert_to_display(br_centroid))
print("Fisher-Rao Centroid:", manifold.convert_to_display(fr_centroid))

# >>> Right-Sided Centroid:  $\mu = [0.33333333 \ 1.55555556]$ ;  $\Sigma =$ 
# >>>  $[[1.33333333 \ 0.66666667]$ 
# >>>  $[0.66666667 \ 1.11111111]]$ 
# >>> Left-Sided Centroid:  $\mu = [0.5 \ 1.5]$ ;  $\Sigma = [[1.75 \ 1. \ ]$ 
# >>>  $[1. \ 1.75]]$ 
# >>> Bhattacharyya Centroid:  $\mu = [0.41772374 \ 1.53238683]$ ;  $\Sigma =$ 
# >>>  $[[1.53973074 \ 0.82458984]$ 
# >>>  $[0.82458984 \ 1.40126629]]$ 
# >>> Fisher-Rao Centroid:  $\mu = [0.5326167 \ 1.62759115]$ ;  $\Sigma =$ 
# >>>  $[[1.72908532 \ 0.98542147]$ 
# >>>  $[0.98542147 \ 1.54545598]]$ 
```

Finally, we can visualize the objects on the manifold in `matplotlib` [9] via using the ‘`MatplotlibVisualizer`’ class and specifying the objects to plot. One can also register additional callback functions to enhance the visualization. Here we utilize a Tissot-style visualization of the covariance

matrices whilst plotting the mean vector. The final visualization is shown in Figure 1. Notice that the `plot_object` function accepts typical `matplotlib` arguments.

```

from bregman.visualizer.matplotlib.callback import
    VisualizeGaussian2DCovariancePoints
from bregman.visualizer.matplotlib.matplotlib import MatplotlibVisualizer

# These objects can be visualized through matplotlib
visualizer = MatplotlibVisualizer(manifold, (0, 1))
visualizer.plot_object(point_1, c="black")
visualizer.plot_object(point_2, c="black")
visualizer.plot_object(
    theta_centroid, c="red", label="Right-Sided Centroid"
)
visualizer.plot_object(eta_centroid, c="blue", label="Left-Sided Centroid"
)
visualizer.plot_object(
    br_centroid, c="purple", label="Bhattacharyya Centroid"
)
visualizer.plot_object(fr_centroid, c="pink", label="Fisher-Rao Centroid")
visualizer.add_callback(VisualizeGaussian2DCovariancePoints())

visualizer.visualize(LAMBDA_COORDS) # Display coordinate type

```

2 A short introduction to Bregman and Fisher-Rao manifolds

We first briefly review the concepts of Bregman manifolds and its relationship with Fisher-Rao manifolds in §2.1. Then we explain the goals of the `pyBregMan` library in §2.4. Let us mention the `GeomStats` Python library which includes an information geometry package [11] implementing Fisher-Rao manifolds, and the `Manifolds.jl` Julia package [2] among other public libraries.

2.1 Bregman manifolds: A quick review

Let $F : \Theta \subset \mathbb{R}^m \rightarrow \mathbb{R}$ be a strictly convex and differentiable real-valued convex function defined over a topologically open domain $\Theta \subset \mathbb{R}^m$. The Bregman divergence [6] between $\theta_1 \in \Theta$ and $\theta_2 \in \Theta$ is a measure of dissimilarity defined by the following formula:

$$B_F(\theta_1 : \theta_2) = F(\theta_1) - F(\theta_2) - \langle \theta_1 - \theta_2, \nabla F(\theta_2) \rangle,$$

where $\langle x, y \rangle = x^\top y = \sum_{i=1}^m x_i y_i$ is the Euclidean inner product called dot product or scalar product.

When the Bregman generator F inducing the Bregman divergence B_F is C^3 and of Legendre-type [40], a Bregman divergence induces a dually flat space (M, g, ∇, ∇^*) in information geometry [1] with a single global chart $(\Theta, \theta(\cdot))$.

The torsion-free affine connections ∇ and ∇^* induced respectively by $F(\theta)$ and its convex conjugate¹ $F^*(\eta)$ are flat and coupled to the metric tensor g . The metric g is of type Hessian and can

¹The convex conjugate $F^*(\eta) = \sup_{\theta \in \Theta} \langle \theta, \eta \rangle - F(\theta)$ of a Legendre-type function $(\Theta, F(\theta))$ is of Legendre-type, and the Legendre-Fenchel transform is involutive. We have two gradient maps: $\eta(\theta) = \nabla F(\theta)$ and $\theta(\eta) = \nabla F^*(\eta)$ which are reciprocal to each other (i.e., $\nabla F = (\nabla F^*)^{-1}$), and the convex conjugate is given by the Legendre function $F^*(\eta) = \langle \nabla F^{-1}(\eta), \eta \rangle - F(\nabla F^{-1}(\eta))$.

be expressed either in the θ -coordinate system or the dual η -coordinate system equivalently by

$$g(\theta) = \nabla^2 F(\theta), \quad g(\eta) = \nabla^2 F^*(\eta).$$

Dually flat spaces are special cases of Hessian manifolds [41] which possibly admit several charts and local dual potential functions F and F^* related by the Legendre-Fenchel transformation.

We term Hessian manifolds with single charts or dually flat spaces *Bregman manifolds* because conversely, a single chart manifold M with a dual structure (M, g, ∇, ∇^*) admits a pair of canonical potential functions $F(\theta)$ and $F^*(\eta)$ such that its coordinate-free dually flat divergence D_{∇, ∇^*} between points p_1 and p_2 of M (with $\theta_i = \theta(p_i)$ and $\eta_i = \eta(p_i)$) can be expressed equivalently as:

$$D_{\nabla, \nabla^*}(p_1 : p_2) = B_F(\theta_1 : \theta_2) = B_{F^*}(\eta_2 : \eta_1) = Y_{F, F^*}(\theta_1, \eta_2) = Y_{F^*, F}(\eta_2, \theta_1),$$

where $Y_{F, F^*}(\theta_1, \eta_2)$ is the Fenchel-Young divergence [4, 22]:

$$Y_{F, F^*}(\theta_1, \eta_2) = F(\theta_1) + F^*(\eta_2) - \langle \theta_1, \eta_2 \rangle.$$

See [20] for more details on Bregman manifolds.

Notice that the potential functions $F(\theta)$ and $F^*(\eta) =: G(\eta)$ reconstructed from (M, g, ∇, ∇^*) are not unique [1] but defined up to affine terms. That is, we may consider equivalently the primal potential function:

$$\bar{F}(\theta) = F(A\theta + b) + \langle c, \theta \rangle + d$$

for $A \in \text{GL}(d, \mathbb{R})$, $b, c \in \mathbb{R}^m$ and $d \in \mathbb{R}$, and its corresponding convex conjugate \bar{F}^* to build the same information-geometric structure (M, g, ∇, ∇^*) . This property has been called affine Legendre equivalence in [14]. See §4 of [23] for more details.

Bregman manifolds can be constructed from convex functions arising from statistical models. For example,

- When $F(\theta)$ is the cumulant function of an exponential family [1], we get a Bregman manifold with Bregman divergence corresponding to the reverse Kullback-Leibler divergence [27]. When choosing the partition function $Z(\theta) = \exp(F(\theta))$ instead of $F(\theta)$ (a log-convex function hence convex), the Bregman divergence amounts to the Kullback-Leibler divergence between unnormalized densities [28].
- When $F(\theta)$ is the negentropy of a mixture family [1], we get a Bregman manifold with Bregman divergence corresponding to the Kullback-Leibler divergence [31].
- All statistical models parameterized by either one or two parameters can yield Bregman manifolds because the 2D Fisher-Rao metrics are Hessian. See for example the case of univariate elliptical distributions [13].

2.2 Fisher-Rao manifolds

A Fisher-Rao manifold [39] (M, g) is a Riemannian manifold M induced by the Fisher information metric g of a statistical model $\{p_\theta(x) : \theta \in \Theta\}$ which yields a geodesic distance called Rao's distance [7]. When the Fisher information metric is Hessian and defined according to a single chart (i.e., there exists a coordinate system $\theta(\cdot)$ and a potential function $F(\theta)$ such that $g(\theta) = \nabla^2 F(\theta)$), the Fisher-Rao manifold can also be considered as a Bregman manifold.

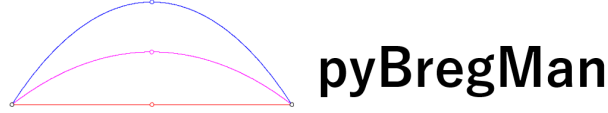


Figure 2: The logo for the `pyBregMan` library displays the Fisher-Rao geodesics (self-dual 0-geometry) and the dual exponential/mixture geodesics (± 1 -geometry) between two univariate normal distributions visualized on the (μ, σ) upper plane.

For example, the Fisher-Rao manifold of the statistical model of univariate Gaussian distributions is Hessian since parameterized by a 2D parameter. This manifold is also a Bregman manifold. Figure 2 illustrates the Fisher-Rao geodesic (purple), ∇ -geodesic (called e -geodesic in blue induced by the cumulant function F) and the ∇^* -geodesic (called m -geodesic in red) used for the logo of `pyBregMan`. The e/m -geodesics correspond to the ± 1 -geometry and the Fisher-Rao geodesic to the self-dual 0-geometry, see [1].

2.3 Divergence-based information geometry

Given a smooth divergence $D(\theta_1 : \theta_2)$, Eguchi [8] proposed a method to induce a divergence-based manifold, i.e., a dualistic structure (M, g, ∇, ∇^*) related to the forward divergence $D(\theta_1 : \theta_2)$ and reverse divergence $D^*(\theta_1 : \theta_2) = D(\theta_2 : \theta_1)$. In particular, when $D(\theta_1 : \theta_2) = B_F(\theta_1 : \theta_2)$ is a Bregman divergence, the divergence-based manifold amounts to a Bregman manifold.

When $D(\theta_1 : \theta_2) = D_{F,\alpha}(\theta_1 : \theta_2)$ is Zhang α -divergence [42] (also called Burbea-Rao divergence in [29]):

$$D_{F,\alpha}(\theta_1 : \theta_2) = \frac{4}{1-\alpha^2} \left(\frac{1-\alpha}{2} F(\theta_1) + \frac{1+\alpha}{2} F(\theta_2) - F\left(\frac{1-\alpha}{2}\theta_1 + \frac{1+\alpha}{2}\theta_2\right) \right), \quad \alpha \in \mathbb{R} \setminus \{-1, 1\},$$

the divergence-based manifold induced by $D_{F,\alpha}(\theta_1 : \theta_2)$ is a α -Hessian manifold [43] which corresponds to the α -geometry [1] extending the dual Bregman manifolds which are obtained in the limit cases $\alpha = 1$ and $\alpha = -1$:

$$B_F(\theta_1 : \theta_2) = \lim_{\alpha \rightarrow -1} D_{F,\alpha}(\theta_1 : \theta_2), \quad B_F(\theta_2 : \theta_1) = \lim_{\alpha \rightarrow 1} D_{F,\alpha}(\theta_1 : \theta_2).$$

By continuity, we let $D_{F,-1}(\theta_1 : \theta_2) = B_F(\theta_1 : \theta_2)$ and $D_{F,1}(\theta_1 : \theta_2) = B_F(\theta_2 : \theta_1)$. Figure 3 shows how structures and divergences relate to each others.

The 0-Hessian manifold correspond to the Fisher-Rao manifold when the Fisher metric is Hessian, and the statistical divergence corresponding to $D_{F,0}$ induced by the cumulant function of an exponential family is the Bhattacharyya distance [29].

2.4 Purposes of the library

The three main goals of the `pyBregMan` library are

1. To provide a *geometric kernel* to implement, visualize, and export figures of main concepts of Bregman manifolds in 2D and 3D (e.g., dual θ/η coordinates which are ∇/∇^* -affine coordinate systems, reciprocal basis, connection-based geodesics, metric-compatible parallel transport, Bregman balls, Bregman projections, etc.);

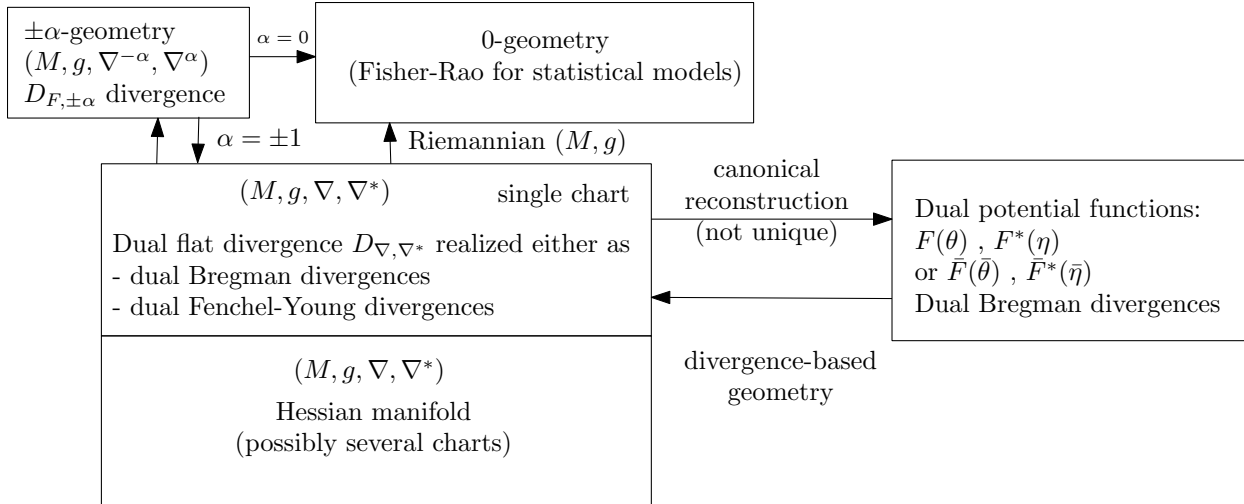


Figure 3: Overview of the structures with related divergences.

2. To provide APIs for handling the Fisher-Rao manifolds and the dualistic structure (α -geometry) in information geometry of statistical models with Fisher information of Hessian type;
3. To use the APIs to demonstrate use cases of information geometry on exponential and mixture families: For example, to compute the Chernoff information [21], to approximate the matrix geometric mean [15], or to compute the discrete Jensen-Shannon centroid [18], etc. That is, to ease the programming of information geometry in action in various fields of information sciences.

In particular, we shall consider the following Bregman manifolds:

- The family categorical distributions interpreted either as an exponential family or a (dual) mixture family [1];
- The exponential family of multivariate normal distributions for which the Fisher-Rao geodesics [10] have been recently elicited, yielding efficient $(1 + \epsilon)$ -approximation algorithms for the Fisher-Rao distance [26] for any $\epsilon > 0$;
- The characteristic functions of regular cones including the matrix symmetric positive definite (SPD) cone which find applications in mathematical programming [37] among others.

3 Structure of the library

In the following section, we outline the structure of the `pyBregMan` library. Additionally, we highlight connections between specific implementation details and API design which corresponds to the concepts of Bregman manifolds, *i.e.*, Section 2.1. We first highlight core primitives of the library, clarifying how manifold objects and data interact within `pyBregMan`. We then outline additional geometric objects which are currently included in the library. Defined application manifolds which can be readily used are presented. Finally, we present the visualization pipeline.

3.1 Primitives of the Library

Various primitives of `pyBregMan` are found in the `bregman.base` and `bregman.manifold` submodules. We will examine the `Coords` type and the `BregmanManifold` abstract class.

3.1.1 Coordinates and Points

From the former, an important aspect of the library is how the `Coords` class annotates different geometric objects, which inherit from `CoordObject`. For instance, `Point` provides a coordinate type annotation for data to be used in our manifolds. All Bregman manifolds are equipped with `THETA_COORDS` (θ -coordinate system) and `ETA_COORDS` (η -coordinate system) which are instances of coordinates `Coords`. Additional instances of `Coords` can be defined, for instance `LAMBDA_COORDS` (ordinary parameters) for Gaussian distributions, see Section 1. A subset of coordinates are defined by `DualCoords`, which provide an enum type restricted to only θ - and η -coordinate systems. This provides restriction of the `pyBregMan` API for geometric objects which are only defined w.r.t. θ - and η -coordinate systems.

Notice that in the discussion of the coordinate system typing of the library, no specific manifold has been specified. Indeed, currently data defined by `Point` can be freely switched between different manifolds under the assumption that the dimension (shape of the data) and constraints (*e.g.*, ensuring positive semi-definiteness of Gaussian covariances) of the data is valid in each manifold.

For example, the dually flat symmetric positive-definite manifold [1] can be obtained either as the exponential family manifold of same-mean Gaussian distributions or as the Bregman manifold induced by the logdet barrier function [38].

3.1.2 Bregman Manifolds

The `bregman.manifold` submodule provides the main components of all manifold classes defined in the library. In particular, all manifold objects in `pyBregMan` implement from the abstract class `BregmanManifold` in `bregman.manifold.manifold`. The dependency graph of `BregmanManifold` is shown in Figure 4. A `BregmanManifold` must define two Bregman Generators and define the dimension of the generators' inputs. The two generators consist of a `theta_generator` F and a `eta_generator` F^* . `pyBregMan` assumes that the defined generator classes are dual. An `eta_generator` is optional in its definition and can be set to `None`; however, this would greatly limit the functionality of the manifold.

The prescribed `Generator` class requires F/F^* to be twice differentiable, with their corresponding derivatives defined, see its corresponding methods in Figure 4. For quick development and easier usage, we provide `AutoDiffGenerator` in `bregman.manifold.generator`, which uses the `autograd` library to automatically calculate the required first and second derivatives via auto-differentiation. As such, by using `AutoDiffGenerator`, a user only needs to define F with gradient ∇F and Hessian $\nabla^2 F$ automatically defined. We do note that for numeric precision, one may still want to define the derivatives explicitly.

The `FlatConnection` composition in `BregmanManifold` simply defines the torsion-free affine connections induced by the input `Generators` (utilizes auto-differentiation to calculate the metric).

Finally, the `Atlas` composition in `BregmanManifold` is a class which provides management of the different coordinate systems specified by `Coords`. In particular, it allows instances of `Coords` and coordinate changes to be registered in the `BregmanManifold`. This allows coordinate dependent geometric operations to be freely utilized on data which may potentially have different coordinates.

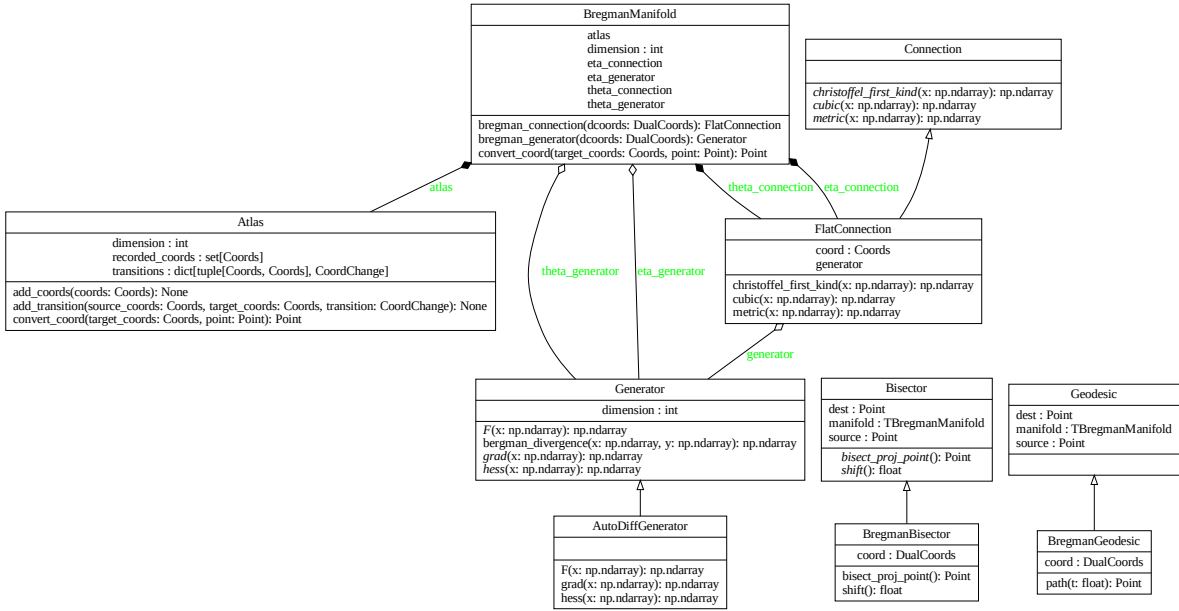


Figure 4: UML dependency graph of the `bregman.manifold.manifold` submodule. Zoom in for details.

We show instances of this convenience in Section 3.2. It should be noted to allow coordinate changes between all registered coordinate systems, all combinations of coordinate changes must be defined. The conversion between θ - and η -coordinates are automatically defined via ∇F and $\nabla F^* = \nabla G$, respectively.

3.1.3 Geodesics and Bisectors

Two additional geometric objects that are defined in the `bregman.manifold` submodule are the `Geodesic` and `Bisector` objects [5]. For the latter, `Bisector` is currently only for visualization, see Section 4.3. `Geodesic` defines an abstract object, which when implemented provides a curve object which returns points when given a value $t \in [0, 1]$, mapping from source ($t = 0$) to destination ($t = 1$). In `bregman.manifold.geodesic`, a concrete implementation of `BregmanGeodesic` is defined. This allows a θ - or η -geodesic to be defined for a specified manifold. Its implementation is shown in the following.

```

from bregman.base import Curve, DualCoords, Point
from bregman.manifold.manifold import BregmanManifold

...

class BregmanGeodesic(Geodesic[BregmanManifold]):

    def __init__(self, manifold: BregmanManifold, source: Point, dest:
        Point, dcoords: DualCoords = DualCoords.THETA) -> None:
        super().__init__(manifold, source, dest)

```

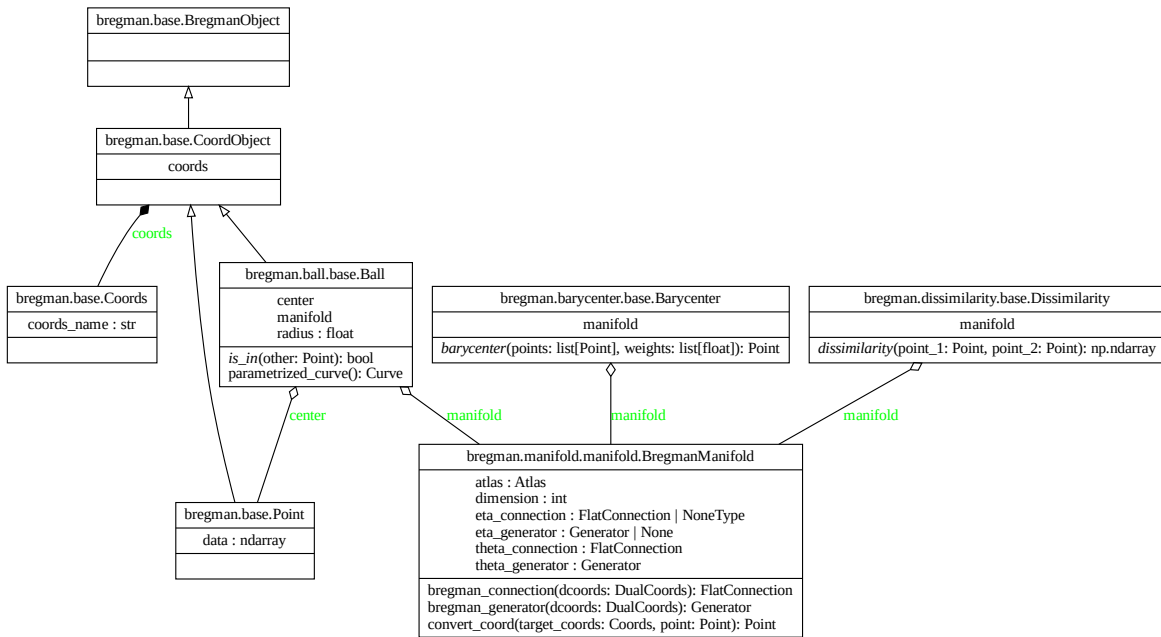


Figure 5: Abridged UML dependency graph of additional geometric objects.

```

self.coord = dcoords

def path(self, t: float) -> Point:
    src_coord_data = self.manifold.convert_coord(self.coord.value,
        self.source).data
    dst_coord_data = self.manifold.convert_coord(self.coord.value,
        self.dest).data

    # As flat in its own coordinate
    return Point(
        coords=self.coord.value,
        data=(1 - t) * src_coord_data + t * dst_coord_data,
    )

```

In addition the source and dest data Points, it takes in a `BregmanManifold` and a `DualCoord`. This allows the source and destination point of the geodesic to be converted into the specified dually flat coordinate (as per `dcoords: DualCoords`) to define the geodesic via linear interpolation.

3.2 Additional Geometric Objects

In the following, we provide a brief description the additional geometric objects provided by `pyBregMan`. We only discuss their abstract classes and leave example usages to Section 4. The geometric objects can be depicted in Figure 5.

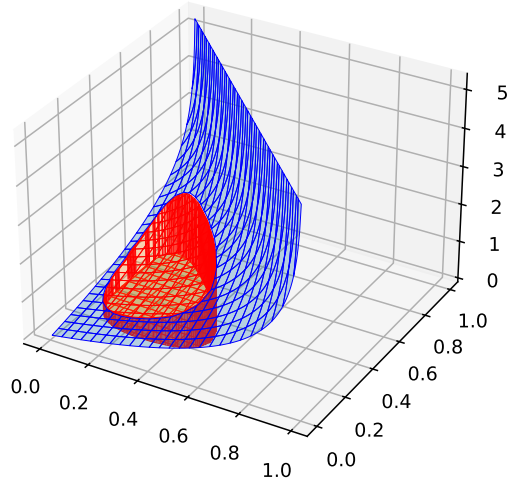


Figure 6: A 2D Bregman ball/sphere can be obtained as the vertical projection of the intersection of a 3D plane with the graph of the potential function [5].

- `bregman.ball.base.Ball`: The `Ball` class allows objects such as Bregman balls to be defined in the library. It is defined from a ball `center` and a `radius`. Currently, the functionality of the class is limited to checking whether or not a point is inside the ball via the `is_in` method. Unlike the other geometric objects discussed in this subsection, `Ball` is a `CoordObject`. This means that `Ball` must have a “natural” coordinate system attributed to its. Bregman balls are basic geometric objects used in proximity query data structures [34, 35]. The smallest enclosing Bregmall ball of a set of points has been studied in [32, 36]. Bregman balls can be considered as intersections of hyperplanes with the graph of the potential function [5], see Figure 6.
- `bregman.barycenter.base.Barycenter`: The `Barycenter` class provides an interface for different barycenter algorithms to be defined. In particular, for a particular manifold, it implements a method `barycenter` which “aggregates” a list of points `list[Point]` and a list of weights `list[float]` (of the same length). Examples of concrete implementations of `Barycenter` can be found in Section 1.
- `bregman.dissimilarity.base.Dissimilarity`: The `Dissimilarity` class provides an interface for the definition of dissimilarity functions in the library. These are the class of function which accepts two points and calculates a dissimilarity measure. An example of a concrete implementation of `Dissimilarity` is the `BregmanDivergence`. In information geometry, a smooth dissimilarity is called a divergence and interpreted as a function on the product manifold: a yoke [3] or contrast function [12].

3.3 Application Manifolds

We provide a variety of application manifolds in `pyBregMan`. These manifolds are concrete implementations of the `BregmanManifold`. In particular, they all inherit from the `ApplicationManifold` class in the submodule `bregman.application.application`. Implementing `ApplicationManifold` has two additional requirements over `BregmanManifold`. First, a λ -coordinate system needs to be defined. This is typically a representation of points in the manifold which do not correspond to either the θ -or η -coordinates. Secondly, a `DisplayPoint` needs to be defined. This is just a pretty-printing wrapper for a specific coordinate system.

The following presents a list of implemented application manifolds.

- Distributions (statistical models):
 - Exponential Family
 - * `bregman.application.distribution.exponential_family.gaussian.GaussianManifold`
 - * `bregman.application.distribution.exponential_family.multinomial.MultinomialManifold`
 - * `bregman.application.distribution.exponential_family.categorical.CategoricalManifold`
 - Mixture
 - * `bregman.application.distribution.mixture.discrete_mixture.DiscreteMixture`
 - * `bregman.application.distribution.mixture.ef_mixture.EFMixtureManifold`
- `bregman.application.psd.PSDManifold`

In each submodule, additional subclasses of `ApplicationManifold` are defined and used. For instance, all `DistributionManifolds` require a mapping from `Point` to `Distribution` (from `bregman.object.distribution`).

In addition to the manifold defined, additional manifold specific geometric objects are sometimes defined. For instance, the `GaussianManifold` contains additional submodules which defines Gaussian specific dissimilarity measures and geodesics. Notably, we provide implementations of approximate Fisher-Rao distance and geodesics using Kobayashi’s approximation [10].

3.4 Visualization

`pyBregMan` provides a visualization submodule in `bregman.visualizer`. In particular, `MatplotlibVisualizer` in `bregman.visualizer.matplotlib` provides an implementation of a visualizer using the `matplotlib` library [9]. The visualizer implements a plot function for every subtype of `BregmanObject` (defined in `bregman.base`). These are points `Point`, geodesics `Geodesic`, and bisectors `Bisector`. Additional `VisualizerCallbacks` can be defined if additional plotting functionality is desired. Also note that `matplotlib` specific arguments can also be used when using `MatplotlibVisualizer`, see Section 1.

4 Some examples of Hessian Fisher-Rao statistical models

In the following section, we present a series of visual vignettes to demonstrate different uses of `pyBregMan`. In particular, we consider the following examples:

- Positive Semi-definite Matrices (SPD cone): Inductive arithmetic-harmonic means [16] to calculate the geometric matrix mean (see also [25]). See Figure 7.
- Categorical Distributions: Calculating pixel intensity histogram centroids of images. In particular, we calculate the sided Kullback-Leibler centroids [33] and the Jensen-Shannon centroid [18].
- Gaussian Distributions: Calculating the Chernoff point [21] which is useful in Bayesian hypothesis testing and in information fusion tasks.

4.1 Positive Semi-definite Matrices: Geometric Matrix Means

In the space of Positive Semi-definite (PSD) matrices, an iterative algorithm exists to obtain the mid-point of the Riemannian geodesic. In particular, it has been shown that by iteratively taking the arithmetic and harmonic mean between PSD matrices, and then setting those means as the new “initial” points, one will converge in a quadratic order to the geometric mean [16]. For PSD matrices, the geometric mean between matrices corresponds to the mid-point of the Riemannian geodesic; and the arithmetic mean and geometric mean correspond to the mid points of a primal-dual pair of geodesics.

Figure 7 demonstrates the inductive arithmetic-harmonic mean (AHM) algorithm for calculating the Riemannian geodesic mid-point. In particular, note the visualization of the primal and dual geodesic being plotted with their corresponding mid-points becoming the next starting points.

```
import numpy as np

from bregman.application.psd import PSDManifold
from bregman.base import ETA_COORDS, LAMBDA_COORDS, THETA_COORDS,
    DualCoords, Point
from bregman.manifold.geodesic import BregmanGeodesic
from bregman.visualizer.matplotlib import MatplotlibVisualizer

DISPLAY_TYPE = LAMBDA_COORDS
VISUALIZE_INDEX = (0, 1)

manifold = PSDManifold(2)

coord1 = Point(LAMBDA_COORDS, np.array([1, 0.5, 2]))
coord2 = Point(LAMBDA_COORDS, np.array([1, 0, 0.5]))

primal_geo = BregmanGeodesic(
    manifold, coord1, coord2, dcoords=DualCoords.THETA
)
dual_geo = BregmanGeodesic(
    manifold, coord1, coord2, dcoords=DualCoords.ETA
)
```

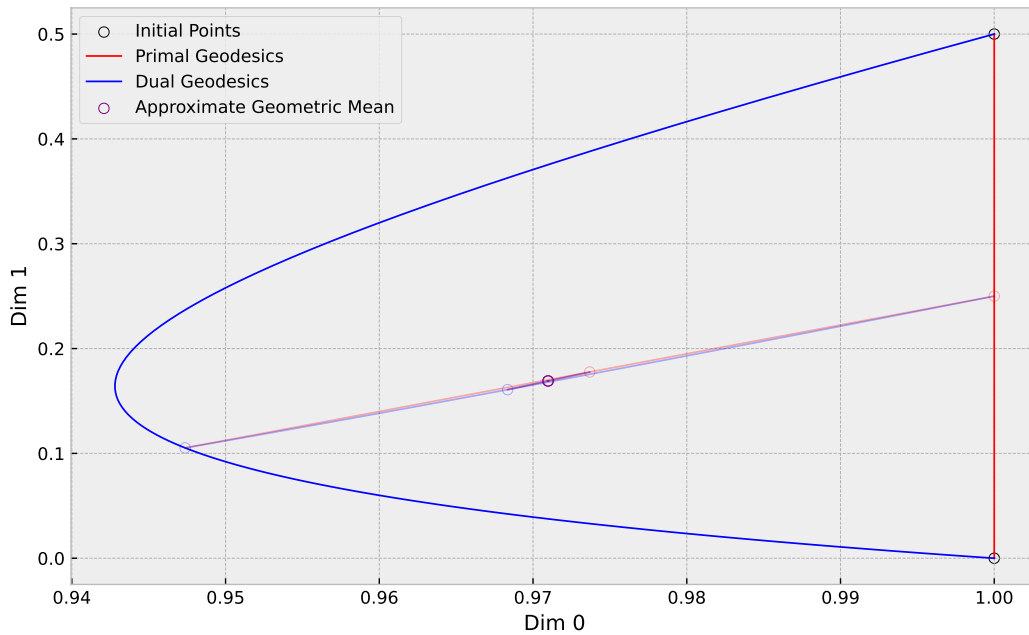


Figure 7: The inductive arithmetic-harmonic mean (AHM) converges to the geometric matrix mean.

```

# Define visualizer
visualizer = MatplotlibVisualizer(manifold, VISUALIZE_INDEX)

# Add objects to visualize
visualizer.plot_object(coord1, c="black", label="Initial Points")
visualizer.plot_object(coord2, c="black")
visualizer.plot_object(primal_geo, c="red", label="Primal Geodesics")
visualizer.plot_object(dual_geo, c="blue", label="Dual Geodesics")

p, q = coord1, coord2
ITERS = 5
for i in range(ITERS):
    primal_geo = BregmanGeodesic(manifold, p, q, dcoords=DualCoords.THETA)
    dual_geo = BregmanGeodesic(manifold, p, q, dcoords=DualCoords.ETA)

    if i > 0:
        visualizer.plot_object(p, c="red", alpha=0.3)
        visualizer.plot_object(q, c="blue", alpha=0.3)

        visualizer.plot_object(primal_geo, c="red", alpha=0.3)
        visualizer.plot_object(dual_geo, c="blue", alpha=0.3)

p = primal_geo(0.5)

```



Figure 8: Source images being converted into histograms of pixel intensities.

```
q = dual_geo(0.5)
visualizer.plot_object(p, c="purple", label="Approximate Geometric Mean")
visualizer.visualize(DISPLAY_TYPE)
```

4.2 Categorical Distributions: Intensity Centroids

In the following example, we utilize `pyBregMan` to generate different types of centroid on the categorical distribution manifold. In particular, we consider the Jensen-Shannon centroid and its corresponding dual (Jeffreys Centroid) [18]. As we are working in the categorical manifold, we will utilize the convenient connection that the manifold of (discrete) mixture distributions is dual to the categorical manifold; and that the Jensen-Shannon divergences can be calculated as specific instances of the Burbea-Rao divergences on this mixture manifold [29].

To demonstrate this, we consider the task of computing centroid on histograms (categorical distributions) of images' pixel intensity distributions. We specifically discretize the pixel intensity into 256 values corresponding to the average value over the 3 RGB color channels. The images that we consider in this example are those presented in Figure 8. The corresponding Jensen-Shannon and Jeffreys centroids are presented in Figure 9.

```
import requests
import matplotlib.pyplot as plt
import numpy as np
from PIL import Image

def image_gray_hist(image_url: str, ratio: float = 1.0) -> np.ndarray:
    # Get image from url
    image_path = requests.get(image_url, stream=True).raw
    image = Image.open(image_path)
    size = image.size
```

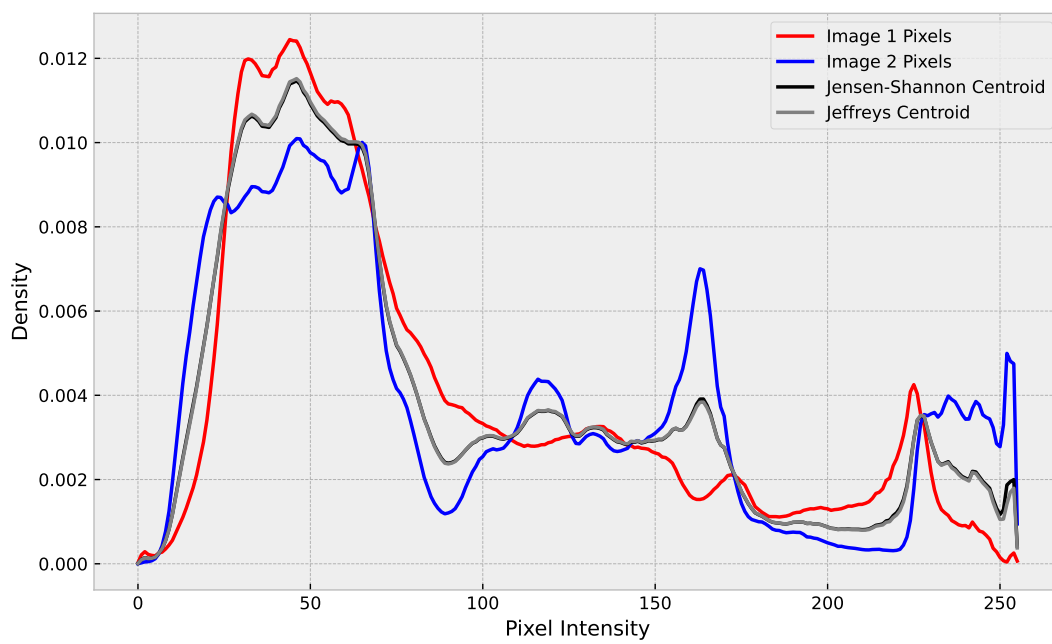



Figure 9: Jensen-Shannon and Jeffreys centroids of pixel intensity histograms of obtained from images displayed in Figure 8.

```

image = image.resize((int(size[0] * ratio), int(size[1] * ratio)))
im_array = np.array(image)

# Discretize pixel intensity
pixel_array = np.mean(im_array.reshape(-1, 3), axis=1)
pixel_array = np rint(pixel_array)

# Make intensity array
hist = np.zeros(256)
for p in pixel_array:
    hist[int(p)] += 1

# Ensures we are in the interiors of the simplex
hist += 1e-8
hist = hist / np.sum(hist)

return hist

image_url_1 = "https://raw.githubusercontent.com/alexandersoen/pyBregMan/
main/img/coco_1.jpg"
image_url_2 = "https://raw.githubusercontent.com/alexandersoen/pyBregMan/
main/img/coco_2.jpg"

hist_1 = image_gray_hist(image_url_1)
hist_2 = image_gray_hist(image_url_2)

from bregman.application.distribution.exponential_family.categorical
import \
    CategoricalManifold
from bregman.base import LAMBDA_COORDS, DualCoords, Point

cat_manifold = CategoricalManifold(k=256)

values = np.arange(cat_manifold.k)

cute_cat_1 = Point(LAMBDA_COORDS, hist_1)
cute_cat_2 = Point(LAMBDA_COORDS, hist_2)

# Let us work in the discrete mixture manifold space now.
mix_manifold = cat_manifold.to_discrete_mixture_manifold()
cute_mix_1 = cat_manifold.point_to_mixture_point(cute_cat_1)
cute_mix_2 = cat_manifold.point_to_mixture_point(cute_cat_2)

from bregman.barycenter.bregman import SkewBurbeaRaoBarycenter

# Define barycenter objects
js_centroid_obj = SkewBurbeaRaoBarycenter(
    mix_manifold, dcoords=DualCoords.THETA
)

```

```

jef_centroid_obj = SkewBurbeaRaoBarycenter(
    mix_manifold, dcoords=DualCoords.ETA
)

# Centroids can be calculated
js_centroid = js_centroid_obj([cute_mix_1, cute_mix_2])
jef_centroid = jef_centroid_obj([cute_mix_1, cute_mix_2])

# Convert from theta-/eta-parameterization back to histograms (lambda)
js_cat = mix_manifold.point_to_categorical_point(js_centroid)
jef_cat = mix_manifold.point_to_categorical_point(jef_centroid)

js_hist = cat_manifold.convert_coord(LAMBDA_COORDS, js_cat).data
jef_hist = cat_manifold.convert_coord(LAMBDA_COORDS, jef_cat).data

# Plot intensity histograms and centroids
with plt.style.context("bmh"):
    plt.plot(values, hist_1, c="red", label="Image 1 Pixels")
    plt.plot(values, hist_2, c="blue", label="Image 2 Pixels")
    plt.plot(values, js_hist, c="black", label="Jensen-Shannon Centroid")
    plt.plot(values, jef_hist, c="grey", label="Jeffreys Centroid")

    plt.xlabel("Pixel Intensity")
    plt.ylabel("Density")

    plt.legend()
    plt.show()

```

4.3 Gaussian Distributions: Chernoff Point / Information

The Chernoff distance [21] or Chernoff information between two statistical distributions with densities $p(x)$ and $q(x)$ with respect to a base measure μ is defined by

$$D_C(p : q) = \max_{\alpha \in (0,1)} -\log \int p^\alpha q^{1-\alpha} d\mu.$$

It can be shown that the optimal value $\alpha^* \in (0, 1)$ can be obtained by intersecting a primal Bregman geodesic with a dual Bregman bisector [21]. Figure 10 displays the so called Chernoff point [17] which can be calculated exactly on the univariate Gaussian manifold, and more generally approximated arbitrarily finely between any two densities of an exponential family.

```

import numpy as np

from bregman.application.distribution.exponential_family.gaussian import
    GaussianManifold
from bregman.base import ETA_COORDS, LAMBDA_COORDS, THETA_COORDS,
    DualCoords, Point
from bregman.dissimilarity.bregman import ChernoffInformation
from bregman.manifold.bisector import BregmanBisector
from bregman.manifold.geodesic import BregmanGeodesic

```

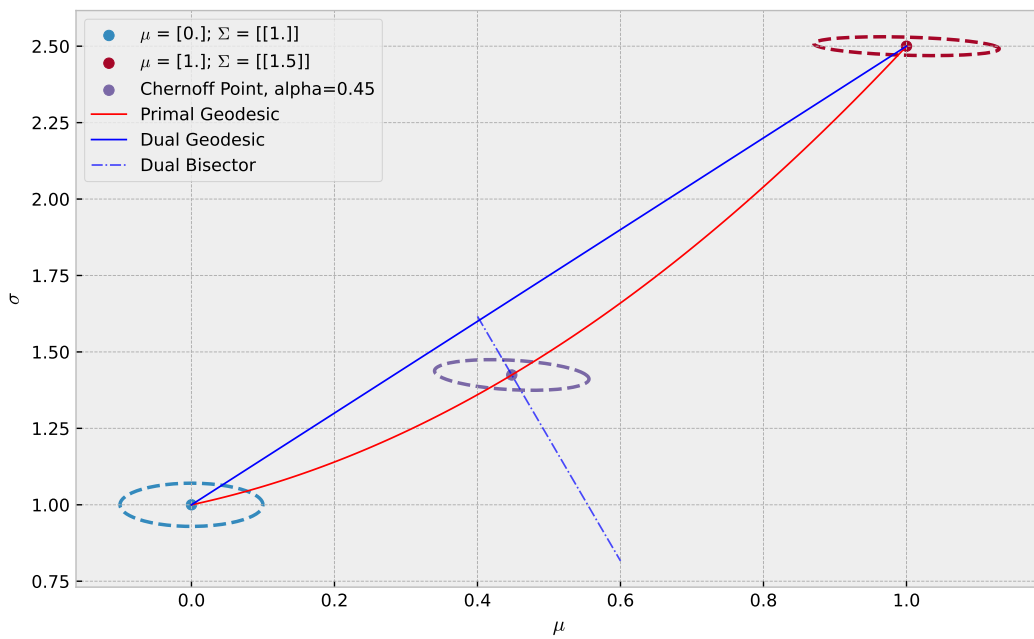


Figure 10: Calculation of the Chernoff point in the manifold of normal distributions (1D Gaussian manifold).

```

from bregman.visualizer.matplotlib import MatplotlibVisualizer,
    Visualize2DTissotIndicatrix

DISPLAY_TYPE = ETA_COORDS
VISUALIZE_INDEX = (0, 1)

# Define manifold + objects
manifold = GaussianManifold(1)

coord1 = Point(LAMBDA_COORDS, np.array([0.0, 1.0]))
coord2 = Point(LAMBDA_COORDS, np.array([1.0, 1.5]))

chernoff_point_alpha = ChernoffInformation(manifold).chernoff_point(coord1
    , coord2)
primal_geo = BregmanGeodesic(manifold, coord1, coord2, DualCoords.THETA)
dual_geo = BregmanGeodesic(manifold, coord1, coord2, DualCoords.ETA)

chernoff_point = primal_geo(1 - chernoff_point_alpha)

eta_bisector = BregmanBisector(
    manifold,
    coord1,
    coord2,
    dcoords=DualCoords.ETA,
)

theta_bisector = BregmanBisector(
    manifold,
    coord1,
    coord2,
    dcoords=DualCoords.THETA,
)

# Define visualizer
visualizer = MatplotlibVisualizer(manifold, VISUALIZE_INDEX, dim_names=(r"
    $\mu$", r"$\sigma$"))
metric_cb = Visualize2DTissotIndicatrix()

# Add objects to visualize
visualizer.plot_object(coord1, label=manifold.convert_to_display(coord1))
visualizer.plot_object(coord2, label=manifold.convert_to_display(coord2))
visualizer.plot_object(chernoff_point, label=f"Chernoff Point, alpha={
    chernoff_point_alpha:.2f}")
visualizer.plot_object(primal_geo, c="red", label="Primal Geodesic")
visualizer.plot_object(dual_geo, c="blue", label="Dual Geodesic")
visualizer.plot_object(eta_bisector, alpha=0.7, c="blue", label="Dual
    Bisector")

visualizer.add_callback(metric_cb)

visualizer.visualize(DISPLAY_TYPE)

```

5 Extending pyBregMan

In the following, we go through an example of extending `pyBregMan` by defining a new application manifold. In particular, we will go through the process of defining a minimal 2D Bregman manifold with primal generator F specified as the extended negative Shannon entropy function. Overall, the process can be broken down into two steps:

- The first is to define the pair of Bregman generators used to define the Bregman manifold.
- The second is to define quantities and methods associated with the λ -coordinates, which is primarily used for displaying points on the manifold.

Finally, we will present an example of implementing new manifold specific geometric objects by defining a new Bregman ball object in this 2D manifold with parameterized equation.

5.1 Defining Generators using auto-differentiation

The first and primary task we will consider is defining the generators for the Bregman manifold. We will utilize `AutoDiffGenerator` from the `bregman.manifold.generator` submodule to define these Bregman generators. By utilizing auto-differentiation, we will only be required to define the generator functions itself and its derivatives will be automatically generated. Although these derivatives can be automatically calculated, we will still be required to implement the dual generator as there is no exact method for automatically generating it. As our primary generator, we utilize the extended negative Shannon entropy function [31]:

$$F(x) = F(x_1, x_2) = x_1 \log x_1 + x_2 \log x_2 - (x_1 + x_2). \quad (1)$$

Through simple calculation, one can find that the dual generator:

$$F^*(x) = \exp(x_1) + \exp(x_2). \quad (2)$$

Defining these generators in `pyBregMan` is straightforward:

```
import autograd.numpy as anp
import numpy as np

from bregman.manifold.generator import AutoDiffGenerator

class EKL2DPrimalGenerator(AutoDiffGenerator):

    def _F(self, x: np.ndarray) -> np.ndarray:
        return anp.dot(x, anp.log(x)) - anp.sum(x)

class EKL2DDualGenerator(AutoDiffGenerator):

    def _F(self, x: np.ndarray) -> np.ndarray:
        return anp.sum(anp.exp(x))
```

One notable point in defining these generators in `pyBregMan` is that we must utilize ‘numpy’ functions wrapped by the ‘autograd’ library. Otherwise, the auto-differentiation procedure will not work.

5.2 Defining the Manifold

With these two generators defined for the Bregman manifold, all we need to do is define some quantities relating to a standard λ -parameterization. This acts as the “usual” parameterization that is used to define objects on the manifold. This can deviate from the canonical θ -or η -parameterizations. In our case, we will simply specify the λ -parameterization to be equivalent to the θ -parameterization.

In terms of `pyBregMan` classes, we need to additionally define a corresponding `DisplayPoint` class. This is utilized for pretty printing the object and will correspond to the λ -parameterization of points. To change the default behaviour, one can override the `convert_to_display` method in `ApplicationManifold`. Nevertheless, the corresponding application manifold can be defined as:

```
from bregman.application.application import ApplicationManifold
from bregman.base import DisplayPoint, DualCoords, Point
from bregman.dissimilarity.bregman import BregmanDivergence

class EKL2DPoint(DisplayPoint):

    def display(self) -> str:
        d_str = r"$\mathrm{EKL}(\{ }, \{ })$"
        return d_str.format(self.data[0], self.data[1])

class EKL2DManifold(ApplicationManifold[EKL2DPoint]):

    def __init__(self) -> None:
        F_gen = EKL2DPrimalGenerator()
        G_gen = EKL2DDualGenerator()

        super().__init__(
            theta_generator=F_gen,
            eta_generator=G_gen,
            display_factory_class=EKL2DPoint,
            dimension=2,
        )

        self.eta_generator = G_gen # Fix typing

    def _lambda_to_theta(self, lamb: np.ndarray) -> np.ndarray:
        return lamb

    def _lambda_to_eta(self, lamb: np.ndarray) -> np.ndarray:
        return self._theta_to_eta(lamb)

    def _theta_to_lambda(self, theta: np.ndarray) -> np.ndarray:
        return theta

    def _eta_to_lambda(self, eta: np.ndarray) -> np.ndarray:
        return self._eta_to_theta(eta)
```

Notice that the conversion between θ -and η -parameterization are automatically defined through

inheritance via the `_theta_to_eta` and `_eta_to_theta` methods. As such, we only needed to define the conversions w.r.t. the λ -coordinates.

The `ApplicationManifold` abstract class is generic and accepts a `DisplayPoint` type. We recommend specifying this to make it specific to the manifold's display point type.

5.3 Defining Geometric Objects

Now utilizing the `EKL2DManifold` manifold we have just defined, we will define a `Ball` object specific to the manifold. We will utilize the closed form parameterization that is available for this specific Bregman manifold.

```
from bregman.ball.base import Ball
from bregman.ball.parameterized import KL2DBregmanBallCurve
from bregman.base import Curve

class EKL2DBregmanBall(Ball[EKL2DManifold]):

    def __init__(
        self,
        manifold: EKL2DManifold,
        center: Point,
        radius: float,
    ) -> None:
        dcoords = DualCoords.THETA
        super().__init__(manifold, center, radius, dcoords.value)

        self.bregman_divergence = BregmanDivergence(manifold, dcoords=
            dcoords)

    def is_in(self, other: Point) -> bool:
        return self.bregman_divergence(self.center, other).item() < self.
            radius

    def parametrized_curve(self) -> Curve:
        return KL2DBregmanBallCurve(self.center, self.radius)
```

Here we are utilizing `KL2DBregmanBallCurve` which was not linked to a specific `Ball` implementation.

The `Ball` abstract class is generic and to make an subclass specific to a manifold type one can make the typing concrete. All geometric style objects follow pattern, *e.g.*, `Geodesic`, `Dissimilarity`, *etc.*

Notice that extended KL sphere can be exactly rendered using the Lambert W function [19].

Notebook

A tutorial notebook entitled “Data Representations on the Bregman Manifold” demonstrating some aspects of the library is available at <https://gram-blogposts.github.io/>.

Acknowledgments

FN warmly thanks Richard Nock for many fruitful discussions on Bregman divergences and its use in machine learning. AS graciously thanks Ella Xi Wang for advice and assistance for module packaging and document generation in Python. AS would also like to thank Coco for providing excellent images for our code examples.

References

- [1] Shun-ichi Amari. *Information Geometry and Its Applications*. Applied Mathematical Sciences. Springer Japan, 2016.
- [2] Seth D Axen, Mateusz Baran, Ronny Bergmann, and Krzysztof Rzecki. Manifolds.jl: an extensible julia framework for data analysis on manifolds. *ACM Transactions on Mathematical Software*, 49(4):1–23, 2023.
- [3] Ole E Barndorff-Nielsen and Peter Edmund Jupp. Yokes and symplectic structures. *Journal of statistical planning and inference*, 63(2):133–146, 1997.
- [4] Mathieu Blondel, André FT Martins, and Vlad Niculae. Learning with Fenchel-Young losses. *Journal of Machine Learning Research*, 21(35):1–69, 2020.
- [5] Jean-Daniel Boissonnat, Frank Nielsen, and Richard Nock. Bregman Voronoi diagrams. *Discrete & Computational Geometry*, 44:281–307, 2010.
- [6] Lev M. Bregman. The relaxation method of finding the common point of convex sets and its application to the solution of problems in convex programming. *USSR computational mathematics and mathematical physics*, 7(3):200–217, 1967.
- [7] Jacob Burbea and C Radhakrishna Rao. Entropy differential metric, distance and divergence measures in probability spaces: A unified approach. *Journal of Multivariate Analysis*, 12(4):575–596, 1982.
- [8] Shinto Eguchi. Geometry of minimum contrast. *Hiroshima Mathematical Journal*, 22(3):631–647, 1992.
- [9] J. D. Hunter. Matplotlib: A 2d graphics environment. *Computing in Science & Engineering*, 9(3):90–95, 2007.
- [10] Shimpei Kobayashi. Geodesics of multivariate normal distributions and a Toda lattice type Lax pair. *Physica Scripta*, 98(11):115241, 2023.
- [11] Alice Le Brigant, Jules Deschamps, Antoine Collas, and Nina Miolane. Parametric information geometry with the package Geomstats. *ACM Transactions on Mathematical Software*, 49(4):1–26, 2023.
- [12] Takao Matumoto et al. Any statistical manifold has a contrast function—On the C^3 -functions taking the minimum at the diagonal of the product manifold. *Hiroshima Math. J.*, 23(2):327–332, 1993.

- [13] Ann FS Mitchell. Statistical manifolds of univariate elliptic distributions. *International Statistical Review/Revue Internationale de Statistique*, pages 1–16, 1988.
- [14] Naomichi Nakajima and Toru Ohmoto. The dually flat structure for singular models. *Information Geometry*, 4(1):31–64, 2021.
- [15] Yoshimasa Nakamura. Algorithms associated with arithmetic, geometric and harmonic means and integrable systems. *Journal of computational and applied mathematics*, 131(1-2):161–174, 2001.
- [16] Yoshimasa Nakamura. Algorithms associated with arithmetic, geometric and harmonic means and integrable systems. *Journal of computational and applied mathematics*, 131(1-2):161–174, 2001.
- [17] Frank Nielsen. An information-geometric characterization of Chernoff information. *IEEE Signal Processing Letters*, 20(3):269–272, 2013.
- [18] Frank Nielsen. On a generalization of the Jensen–Shannon divergence and the Jensen–Shannon centroid. *Entropy*, 22(2):221, 2020.
- [19] Frank Nielsen. On geodesic triangles with right angles in a dually flat space. In *Progress in Information Geometry: Theory and Applications*, pages 153–190. Springer, 2021.
- [20] Frank Nielsen. The many faces of information geometry. *Not. Am. Math. Soc*, 69(1):36–45, 2022.
- [21] Frank Nielsen. Revisiting chernoff information with likelihood ratio exponential families. *Entropy*, 24(10):1400, 2022.
- [22] Frank Nielsen. Statistical divergences between densities of truncated exponential families with nested supports: Duo Bregman and duo Jensen divergences. *Entropy*, 24(3):421, 2022.
- [23] Frank Nielsen. Beyond scalar quasi-arithmetic means: Quasi-arithmetic averages and quasi-arithmetic mixtures in information geometry. *arXiv preprint arXiv:2301.10980*, 2023.
- [24] Frank Nielsen. Fisher-rao and pullback hilbert cone distances on the multivariate gaussian manifold with applications to simplification and quantization of mixtures. In *Topological, Algebraic and Geometric Learning Workshops 2023*, pages 488–504. PMLR, 2023.
- [25] Frank Nielsen. What is... an inductive mean? *Notices of the American Mathematical Society*, 70(11), 2023.
- [26] Frank Nielsen. Approximation and bounding techniques for the Fisher-Rao distances. *arXiv preprint arXiv:2403.10089*, 2024.
- [27] Frank Nielsen. Divergences induced by the cumulant and partition functions of exponential families and their deformations induced by comparative convexity. *Entropy*, 26(3):193, 2024.
- [28] Frank Nielsen. Divergences induced by the cumulant and partition functions of exponential families and their deformations induced by comparative convexity. *Entropy*, 26(3):193, 2024.

- [29] Frank Nielsen and Sylvain Boltz. The Burbea-Rao and Bhattacharyya centroids. *IEEE Transactions on Information Theory*, 57(8):5455–5466, 2011.
- [30] Frank Nielsen and Vincent Garcia. Statistical exponential families: A digest with flash cards. *arXiv preprint arXiv:0911.4863*, 2009.
- [31] Frank Nielsen and Gaëtan Hadjeres. Monte Carlo information-geometric structures. *Geometric Structures of Information*, pages 69–103, 2019.
- [32] Frank Nielsen and Richard Nock. On the smallest enclosing information disk. *Information Processing Letters*, 105(3):93–97, 2008.
- [33] Frank Nielsen and Richard Nock. Sided and symmetrized Bregman centroids. *IEEE transactions on Information Theory*, 55(6):2882–2904, 2009.
- [34] Frank Nielsen, Paolo Piro, and Michel Barlaud. Bregman vantage point trees for efficient nearest neighbor queries. In *IEEE International Conference on Multimedia and Expo*, pages 878–881. IEEE, 2009.
- [35] Frank Nielsen, Paolo Piro, and Michel Barlaud. Tailored Bregman ball trees for effective nearest neighbors. In *Proceedings of the 25th European Workshop on Computational Geometry (EuroCG)*, pages 29–32, 2009.
- [36] Richard Nock and Frank Nielsen. Fitting the smallest enclosing Bregman ball. In *European Conference on Machine Learning*, pages 649–656. Springer, 2005.
- [37] Atsumi Ohara, Hideyuki Ishi, and Takashi Tsuchiya. Doubly autoparallel structure and curvature integrals: Applications to iteration complexity for solving convex programs. *Information Geometry*, 7(Suppl 1):555–586, 2024.
- [38] Atsumi Ohara, Nobuhide Suda, and Shun-ichi Amari. Dualistic differential geometry of positive definite matrices and its applications to related problems. *Linear Algebra and its Applications*, 247:31–53, 1996.
- [39] Calyampudi Radhakrishna Rao. Information and the accuracy attainable in the estimation of statistical parameters. *Bulletin of the Calcutta Mathematical Society*, 37(3):81–91, 1945.
- [40] Ralph Tyrrell Rockafellar. Conjugates and Legendre transforms of convex functions. *Canadian Journal of Mathematics*, 19:200–205, 1967.
- [41] Hirohiko Shima. *The geometry of Hessian structures*. World Scientific, 2007.
- [42] Jun Zhang. Divergence function, duality, and convex analysis. *Neural computation*, 16(1):159–195, 2004.
- [43] Jun Zhang. Divergence functions and geometric structures they induce on a manifold. In *Geometric Theory of Information*, pages 1–30. Springer, 2014.

A Full Class Diagram

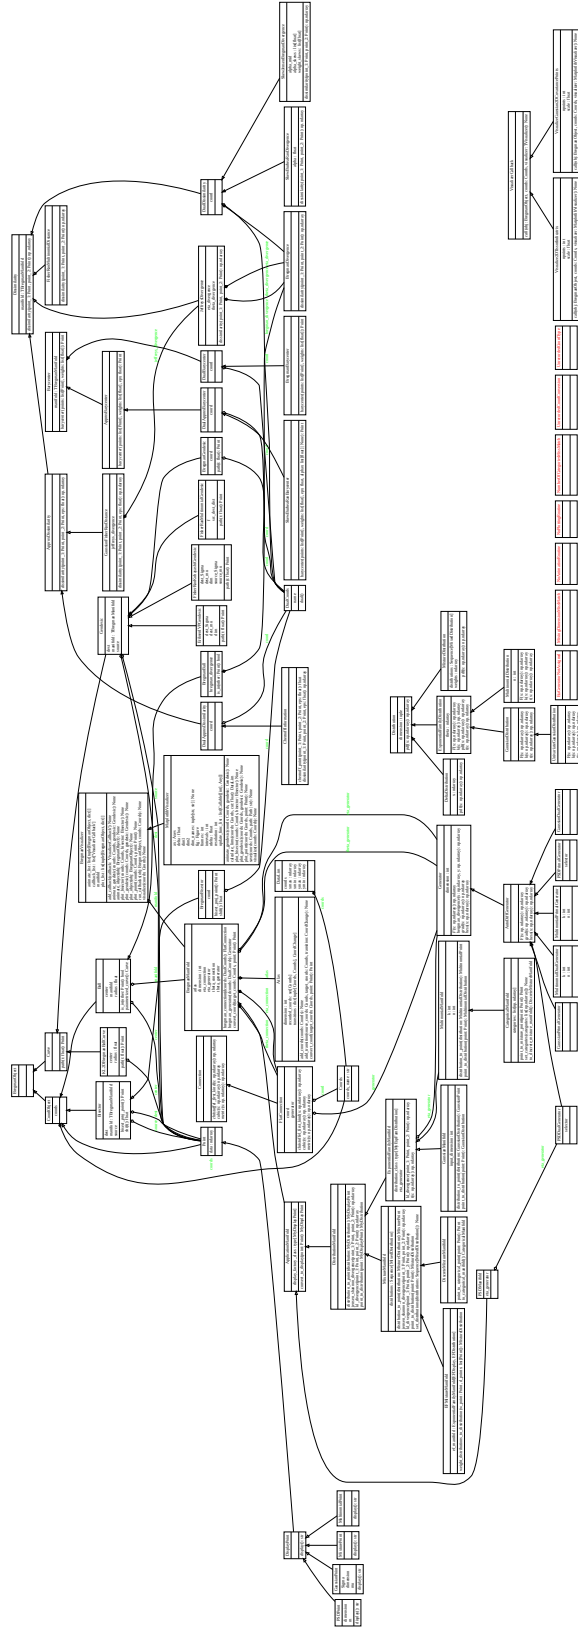


Figure 11: Full class diagram dependencies (zoom for details).