Coupling without Communication and Drafter-Invariant Speculative Decoding

Majid Daliri New York University daliri.majid@nyu.edu Christopher Musco New York University cmusco@nyu.edu Ananda Theertha Suresh Google theertha@google.com

August 20, 2024

Abstract

Suppose Alice has a distribution \mathcal{P} and Bob has a distribution \mathcal{Q} . Alice wants to generate a sample $a \sim \mathcal{P}$ and Bob a sample $b \sim \mathcal{Q}$ such that a = b with has as high of probability as possible. It is well-known that, by sampling from an optimal coupling between the distributions, Alice and Bob can achieve $\Pr[a = b] = 1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$, where $D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$ is the total variation distance between \mathcal{P} and \mathcal{Q} .

What if Alice and Bob must solve this same problem without communicating at all? Perhaps surprisingly, with access to public randomness, they can still achieve $\Pr[a = b] \geq \frac{1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})}{1 + D_{\text{TV}}(\mathcal{P}, \mathcal{Q})} \geq 1 - 2D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$. In fact, this bound can be obtained using a simple protocol based on the Weighted MinHash algorithm.

In this work, we explore the "communication-free coupling" problem in greater depth. First, we show that an equally simple protocol based on "Gumbel sampling" matches the worst-case guarantees of the Weighted MinHash approach, but tends to perform better in practice. Conversely, we prove that both approaches are actually sharp: no communication-free protocol can achieve $\Pr[a = b] > \frac{1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})}{1 + D_{\text{TV}}(\mathcal{P}, \mathcal{Q})}$ in the worst-case. Finally, we prove that, for distributions over n items, there exists a scheme that uses just $O(\log(n/\epsilon))$ bits of communication to achieve $\Pr[a = b] = 1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q}) - \epsilon$, i.e. to essentially match optimal coupling.

Beyond our theoretical results, we demonstrate an application of "communication-free coupling" to *speculative decoding*, a recent method for accelerating autoregressive large language models [Leviathan, Kalman, Matias, ICML 2023]. We show that communication-free protocols yield a variant of speculative decoding that we call *Drafter-Invariant Speculative Decoding*, which has the desirable property that the output of the method is fixed given a fixed random seed, regardless of what drafter is used for speculation. Codes are available at https://github.com/majid-daliri/DISD

1 Introduction

The goal of this paper is to introduce a problem, "communication-free coupling", that sounds difficult at first glance, but is actually easy to solve in an optimal way. Suppose we have two cooperating parties, Alice and Bob. Alice has a distribution \mathcal{P} and Bob has a distribution \mathcal{Q} , which, for simplicity, we assume are discrete distributions over the set $\{1, \ldots, n\}$. The goal is for Alice to sample $a \in \{1, \ldots, n\}$ according to \mathcal{P} and Bob to sample $b \in \{1, \ldots, n\}$ according to \mathcal{Q} , in such a way that we maximize the probability that a = b. We are interested in how well Alice and Bob can solve this problem without communicating with each other. We do allow them access to a source of shared random numbers.

If communication was allowed, it is well known that Alice and Bob can achieve:

$$\Pr[a=b] = 1 - D_{\rm TV}(\mathcal{P}, \mathcal{Q}),\tag{1}$$

where $D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$ is the total variation distance between \mathcal{P} and \mathcal{Q} [Wu, 2020, Section 4.3]. To do so, they construct an optimal coupling between the distributions, i.e., a distribution \mathcal{C} over $\{1, \ldots, n\} \times \{1, \ldots, n\}$ with marginals \mathcal{P} and \mathcal{Q} that maximizes $\Pr_{(a,b)\sim\mathcal{C}}[a=b]$. In fact, the total variation distance is defined as $\max_{\text{couplings } \mathcal{C}} \Pr_{(a,b)\sim\mathcal{C}}[a\neq b]$, so the bound in (1) is optimal, with or without communication.

While an optimal coupling between \mathcal{P} and \mathcal{Q} has a simple closed form (see Section 2 for details), sampling from the coupling requires knowledge of *both* \mathcal{P} and \mathcal{Q} . I.e., sampling from an optimal coupling requires communication between Alice and Bob. However, it turns out that it is possible to sample from a *nearoptimal* coupling without any communication at all. In particular, the starting point of our work is a straightforward observation, that is implicit in prior work [Manasse et al., 2010]:

Fact 1. There is a communication-free protocol by which Alice samples $a \sim \mathcal{P}$ and Bob $b \sim \mathcal{Q}$ such that:

$$\Pr[a=b] \ge \frac{1 - D_{\rm TV}(\mathcal{P}, \mathcal{Q})}{1 + D_{\rm TV}(\mathcal{P}, \mathcal{Q})}.$$
(2)

Since $0 \leq D_{\text{TV}}(\mathcal{P}, \mathcal{Q}) \leq 1$, (2) is always larger than $1 - 2D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$. We conclude that it is possible to nearly match the optimum in (1) without communication. Fact 1 follows from an analysis of the popular "Weighted MinHash" method [Manasse et al., 2010, Ioffe, 2010, Shrivastava, 2016, Christiani, 2020]. We provide a sharp analysis of the method (with an exact expression for $\Pr[a = b]$) in Section 3, Claim 5.

1.1 Motivation

The main theoretical question we address in this work is whether the bound of Fact 1 is optimal, or if it possible to get closer to the ideal $1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$ bound. To cut to the point: no, it is not. Fact 1 is optimal in the worst-case. Before discussing our results, however, we provide some motivation for studying communication-free coupling. It turns out that this problem has a direct application to a technique called *speculative decoding* that has gained traction for its ability to accelerate inference in autoregressive language models [Leviathan et al., 2023, Chen et al., 2023, Sun et al., 2023], one of the most important algorithmic challenges in modern machine learning [Hoffmann et al., 2022, Zhou et al., 2024].

Details of speculative decoding are given in Section 5. In short, the method speeds up language models by using a small and inexpensive neural network to draft (i.e., speculate) the tokens that will be generated by a larger state-of-the-art network. Tighter coupling between the token distributions of the two networks leads to higher chance of draft tokens matching the larger model tokens, which leads to accelerated inference.

However, speculate decoding suffers from one major and subtle drawback: if the small "drafter" neural network changes (i.e., because of an update to improve the model), the use of an optimal coupling means that tokens generated by the state-of-the-art neural network will change. This can be potentially problematic in applications of autoregressive language models, where the expected and desired behavior is that the output of a model is *fixed given a fixed random seed*. It allows for researchers and other users to reliably reproduce results and leads to easier unit testing and debugging.

As we will demonstrate in Section 5, communication-free coupling allows for the implementation of a *Drafter-Invariant Speculative Decoding* method that avoids this issue. In particular, the output of the stateof-the-art model is completely independent of what drafter network is used to accelerate inference: it is fixed given a fixed random seed. Intuitively this follows from the fact that in any communication-free coupling protocol, Alice and Bob's samples are necessarily independent when conditioned on their shared randomness.

1.2 Our Contributions

As mentioned, our work seeks to understand if Fact 1 is tight, or if it is possible to improve on the existing Weighted MinHash method for communication-free coupling. Towards that end, we study an alternative approach based on the so-called "Gumbel Max-Trick" or "Gumbel sampling". The method can be described in one sentence: using shared random variables u_1, \ldots, u_n drawn uniformly from [0, 1], Alice returns $a = \operatorname{argmin}_{i \in \{1, \ldots, n\}} \frac{-\ln(u_i)}{p_i}$ 1 and Bob returns $b = \operatorname{argmin}_{i \in \{1, \ldots, n\}} \frac{-\ln(u_i)}{q_i}$, where p_i and q_i denote the respective probabilities that Alice and Bob's distributions, \mathcal{P} and \mathcal{Q} , assign to item *i*. Intuitively, *a* and *b* will be partially coupled because, if some u_i happens to be small, we are more likely to set both a = i and b = i.

We are interested in Gumbel sampling for two reasons. First, it is already widely used in machine learning for sampling from discrete distributions, including for auto-regressive language generation [Kool et al., 2019].

¹Often $\operatorname{argmin}_{i \in \{1,...,n\}} \frac{-\ln(u_i)}{p_i}$ is computed as $\operatorname{argmax}_{i \in \{1,...,n\}} \ln p_i - \ln(-\ln(u_i))$. If u is a uniform random variable in [0, 1], then $-\ln(-\ln(u))$ follows a Gumbel distribution [Gumbel, 1935] and hence the name.

So, using the method for speculative decoding would require essentially no code changes [Maddison et al., 2014, Huijben et al., 2023]. Second, the method has been widely studied in theoretical computer science under different names, including PPSWOR and bottom-k sampling [Cohen, 1997, Rosén, 1997, Cohen, 2023]. Like Weighted MinHash, Gumbel sampling is a "coordinated random sampling" method, and can be applied to many of the same applications [Bessa et al., 2023]. As such it is a natural point of comparison.

We prove the following bound on the performances of Gumbel sampling in Section 3:

Theorem 2. The communication-free Gumbel coupling method (Protocol 3) samples $a \sim \mathcal{P}$ and $b \sim \mathcal{Q}$ such that:

$$\Pr[a=b] = \sum_{j=1}^{n} \frac{1}{\sum_{i=1}^{n} \max(p_i/p_j, q_i/q_j)} \ge \frac{1 - D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})}{1 + D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})}.$$

Theorem 2 shows that our protocol based on Gumbel sampling matches the worst-case $\frac{1-D_{TV}(\mathcal{P},\mathcal{Q})}{1+D_{TV}(\mathcal{P},\mathcal{Q})}$ bound of Fact 1. However, for many distributions, the method often performs much better, suggesting that the inequality in Theorem 2 is can be loose. In particular, in Section 5 we find that the method uniformly outperforms Weighted MinHash for all distributions tested. Proving that Gumbel sampling dominates Weighted MinHash for any pair of distributions is an interesting question for future work.

Nevertheless, despite Gumbel sampling's good empirical performance, the worst-case bound in Theorem 2 is no better than Fact 1. Our next result shows that this is inherent. In Section 4 we prove:

Theorem 3. Consider any protocol that takes as input a distribution and source of public randomness. For any positive integer d, there are distributions \mathcal{P} and \mathcal{Q} with total variation distance $D_{\text{TV}}(\mathcal{P}, \mathcal{Q}) = 1/d$ such that, if Alice runs the protocol to sample $a \sim \mathcal{P}$ and Bob runs the protocol to sample $b \sim \mathcal{Q}$, then:

$$\Pr[a=b] \le \frac{1-1/d}{1+1/d}.$$

Theorem 3 establishes that no protocol can improve on Theorem 2 for all values of $D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$. Perhaps surprisingly, this establishes that extremely simple, time-tested algorithms already yield optimal communicationfree coupling (at least when parameterizing the bound via the total variance distance $D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$).

Since Theorem 3 essentially rules out major improvements on communication-free coupling, it is natural to ask what is possible if we *restrict*, but do not entirely eliminate communication. How many bits of communication between Alice and Bob are required to ensure that $\Pr[a = b] = 1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q}) - \epsilon$, i.e., to nearly match what is possible with optimal coupling? A baseline is to simply discretize \mathcal{P} or \mathcal{Q} , communicate the entire distribution, and compute a near optimal coupling. This takes $O(n \log(n/\epsilon))$ bits of communication (see Section 6 for details). We show that it is possible to get by with much less. In Section 6 we prove:

Theorem 4. There is a protocol that, for any $\epsilon \in (0,1)$, requires $O(\log(n/\epsilon))$ bits of communication in expectation between Alice and Bob to produce samples $a \sim \mathcal{P}$, $b \sim \mathcal{Q}$ such that:

$$\Pr[a=b] \ge 1 - D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q}) - \epsilon.$$

While we are not aware of immediate applications of Theorem 4, it provides an interesting point of comparison to both the full-communication and no-communication settings.

Finally, beyond our theoretical results, we develop our application of communication-free coupling to "drafter-invariant speculative decoding" in Section 5. We provide experimental results which show that the method nearly matches standard speculative decoding in terms of speculation accuracy, but with the added benefit that the neural network output is completely invariant to the drafter network utilized.

1.3 Related Work

Most closely related to our work are prior results on weighted coordinated sampling methods, which generalize well-known techniques like MinHash and the k-minimum values sketch for *unweighted* coordinated sampling [Broder, 1997, Broder et al., 1998, Cohen and Kaplan, 2007, Beyer et al., 2007, Li et al., 2006]. The goal in weighted coordinated sampling is quite similar to ours: Alice and Bob hold vectors, A and B, and seek

to independently produce a subsample of entries from their vector so that 1) indices corresponding to larger entries in the vectors are sampled with higher probability and 2) Alice and Bob return many of the same indices. The aim is to use Alice and Bob's subsamples to estimate functions involving interactions between corresponding entries in A and B, like the inner product $\langle A, B \rangle = \sum_{i=1}^{n} A_i B_i$ [Daliri et al., 2024a, Li, 2017]. To do so effectively, it is critical that we have access to pairs (A_i, B_i) with the same index *i*.

Weighted coordinated sampling methods include Weighted MinHash (also referred to as "consistent weighted sampling") [Manasse et al., 2010, Ioffe, 2010, Haeupler et al., 2014, Wu et al., 2020], Gumbel sampling [Cohen, 2015, 2023], threshold sampling [Flajolet, 1990, Duffield et al., 2005], priority sampling [Duffield et al., 2004, Daliri et al., 2024b], and more [Estan and Naughton, 2006]. While all of these methods intuitively seek to generate samples from A and B that contain the same indices with high probability, that is typically not the final goal: the methods are analyzed for specific downstream application. As such, we are unaware of prior work that specifically obtains bounds for our "communication-free coupling" problem.

We note that several coordinated sampling methods cannot be applied in our context. For example, priority sampling does not ensure that entries from A and B are sampled with probability exactly proportional to specified probabilities (we require samples to truly be drawn from \mathcal{P} and \mathcal{Q}), and threshold sampling does not return a fixed number of samples (we always need exactly one sample). Of the major methods, this leaves Weighted MinHash and Gumbel sampling, which are the two methods we analyze.

2 Preliminaries

Notation. Throughout the paper, we assumes two parties, Alice and Bob, who hold discrete distributions \mathcal{P} and \mathcal{Q} over the set $\{1, \ldots, n\}$. We use p_i to denote the probability that x drawn from \mathcal{P} equals i and q_i to denote the probability that x drawn from \mathcal{Q} equals i. We will sometimes write $\mathcal{P} = \{p_1, \ldots, p_n\}$ and $\mathcal{Q} = \{q_1, \ldots, q_n\}$ since the list of probabilities completely specifies the distributions.

Total Variation Distance. The total variation distance, $D_{TV}(\mathcal{P}, \mathcal{Q})$, between discrete distributions equals:

$$D_{\rm TV}(\mathcal{P},\mathcal{Q}) = \frac{1}{2} \sum_{i=1}^{n} |p_i - q_i| = \sum_{i=1}^{n} \max(0, p_i - q_i) = \sum_{i=1}^{n} \max(0, q_i - p_i).$$
(3)

Throughout our proofs, we will use two elementary inequalities that follow from (3):

$$1 - D_{\rm TV}(\mathcal{P}, \mathcal{Q}) = \sum_{i=1}^{n} p_i - \max(0, p_i - q_i) = \sum_{i=1}^{n} \min(p_i, q_i)$$
(4)

$$1 + D_{\rm TV}(\mathcal{P}, \mathcal{Q}) = \sum_{i=1}^{n} p_i + \max(0, q_i - p_i) = \sum_{i=1}^{n} \max(p_i, q_i)$$
(5)

Coupling with Communication. As discussed in Section 1, if they are allowed to communicate, Alice and Bob can easily sample from $a \sim \mathcal{P}$ and $b \sim \mathcal{Q}$ in such a way that $\Pr[a = b] = 1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$. Concretely, they can execute the following standard protocol:

Protocol 1 Coupling with Communication [Leviathan et al., 2023, Chen et al., 2023]

Protocol for Alice (who has probability vector $\mathcal{P} = [p_1, \ldots, p_n]$):

1: Sample $a \sim \mathcal{P}$. Communicate a and the distribution \mathcal{P} to Bob.

Protocol for Bob (who has probability vector $Q = [q_1, \ldots, q_n]$):

- 1: Await for (a, \mathcal{P}) from Alice.
- 2: With probability $\min(1, q_a/p_a)$ set b = a. Otherwise, sample $b \sim \mathcal{Q}'$, where $\mathcal{Q}' = \{q'_1, \ldots, q'_n\}$ is a distribution on $\{1, \ldots, n\}$ with $q'_i = \frac{\max(0, q_i p_i)}{\sum_{j=1}^n \max(0, q_j p_j)}$.

Clearly Protocol 1 ensures that $a \sim \mathcal{P}$. It is easily checked that it also ensures that $b \sim \mathcal{Q}$. In particular, if $q_i \leq p_i$, $\max(0, q_i - p_i) = 0$, so we only set b = i in step one of the protocol. We do so with probability $\Pr[a = i] \cdot q_i/p_i = q_i$, as desired. If $q_i \geq p_i$, then with p_i probability, we set b = i in step one of the protocol

(exactly when a is set to i). There is also some chance we set b = i in the second step of the protocol, which we execute with probability $\sum_{j=1}^{n} p_j \cdot (1 - \min(1, q_j/p_j)) = \sum_{j=1}^{n} \max(0, p_j - q_j) = \sum_{j=1}^{n} \max(0, q_j - p_j)$. So, the overall probability we set b = i in the second step is $q'_i \cdot \sum_{j=1}^{n} \max(0, q_j - p_j) = q_i - p_i$. Thus, the total probability we set b = i (in either step) is $q_i - p_i + p_i = q_i$, as desired. Finally, we can see that $\Pr[a = b] = \sum_{j=1}^{n} p_j \cdot \min(1, q_j/p_j) = \sum_{j=1}^{n} \min(p_j, q_j) = 1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$ via (4).

3 **Communication-free Protocols**

We begin by describing two communication-free protocols that achieve the bound of Fact 1, so nearly match the optimal $1 - D_{TV}(\mathcal{P}, \mathcal{Q})$ bound obtainable (with communication) by Protocol 1.

3.1Weighted MinHash

We first consider a method based on the Weighted MinHash algorithm, which was introduced under the name "consistent weighted sampling" by Manasse et al. [2010]. The fact that this method achieves the bound of Fact 1 was observed in prior work, including by Manasse et al. [2010]. We provide a self-contained analysis for completeness, and to obtain a sharp bound (i.e., an exact expression for $\Pr[a = b]$).

There are many different ways of implementing the Weighted MinHash method. See Wu et al. [2020] for an overview. We analyze a particularly simple implementation suggested by Shrivastava [2016], which is detailed in Protocol algorithm 2 and illustrated in Figure 1.

Protocol 2 Weighted MinHash Coupling

Fix public random numbers $u_1, u_2, u_3 \dots$ drawn uniformly from the interval [0, n].

Protocol for Alice (who has probability vector $\mathcal{P} = [p_1, \ldots, p_n]$):

1: for k = 1, 2, ... do

if $u_k \in [j-1, j-1+p_j]$ for some $j \in \{1, \ldots, n\}$ then return a = j. 2:

Protocol for Bob (who has probability vector $Q = [q_1, \ldots, q_n]$):

1: for k = 1, 2, ... do if $u_k \in [j-1, j-1+q_j]$ for some $j \in \{1, \ldots, n\}$ then return b = j. 2:




Figure 1: The Weighted MinHash method, described in Protocol 2, selects a sample from a distributions on n items with probabilities p_1, \ldots, p_n by drawing a sequence of numbers u_1, u_2, \ldots , uniformly at random from the interval [0, n]. The first time one of these numbers lands in a subinterval $[j - 1, j - 1 + p_j]$ for any $j \in 1, \ldots, n$, the protocol returns j. For example, in the illustration above, Alice returns 2 (since u_2 falls within $[1, 1 + p_2]$) and Bob returns 4 (since u_5 falls within $[3, 3 + p_4]$)

Claim 5. The communication-free Weighted MinHash coupling method (Protocol 2) generates $a \sim \mathcal{P}, b \sim \mathcal{Q}$ such that:

$$\Pr[a=b] = \frac{1 - D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q}) + \sum_{i=1}^{n} |p_i - q_i| \min(p_i, q_i)}{1 + D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})} \ge \frac{1 - D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})}{1 + D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})}$$

Proof. As illustrated in Figure 1, to run Protocol 2, Alice draws values uniformly at random from the interval [0,n]. The protocol terminates and returns j as soon as a value lands in any subinterval $[j-1, j-1+p_i]$, which are shaded in the top row of Figure 1. Since these subintervals have lengths p_1, \ldots, p_n , the probability that Alice returns j is exactly $\frac{p_j}{\sum_{i=1}^n p_i} = p_j$. The proof that Bob returns j with probability q_j is identical.

We turn our attention to the expression for $\Pr[a = b]$. Let u_k denote be the first uniform random number for which either Alice or Bob terminates, i.e., the first k for which $u_k \in [j - 1, j - 1 + \max(p_j, q_j)]$ for some j. We split the analysis into two cases:

Case 1. Both Alice and Bob terminate at step k, i.e. $u_k \in [j-1, j-1 + \min(p_j, q_j)]$.

Case 2. Only one of Alice and Bob terminate at step k, i.e. $u_k \in [j-1 + \min(p_i, q_i), j-1 + \max(p_i, q_i)]$.

In the first case, they always return the same index, $j = \lfloor u_k \rfloor$, so we have that a = b. Additionally, we can see that, conditioned on the event that k is the first index for which $u_k \in [j-1, j-1 + \max(p_j, q_j)]$ for some j (i.e., that k is the first step that someone terminates at), the first case happens with probability:

$$\frac{\sum_{i=1}^{n} \min(p_i, q_i)}{\sum_{i=1}^{n} \max(p_i, q_i)}.$$
(6)

Next consider the second case. In this case, only one of Alice and Bob terminates at iteration k. The other terminates at iteration k' > k, and it may be that $a \neq b$. To analyze the collision probability, we further break down the case, considering only when $u_k \in [j - 1 + \min(p_j, q_j), j - 1 + \max(p_j, q_j)]$ for a particular value of j. We can see that, conditioned on the fact that one of the parties terminates at step k,

$$\Pr\left[u_k \in [j-1+\min(p_j,q_j), j-1+\max(p_j,q_j)]\right] = \frac{|p_j-q_j|}{\sum_{i=1}^n \max(p_i,q_i)}$$

If u_k does land in the interval $[j-1+\min(p_j,q_j), j-1+\max(p_j,q_j)]$, Alice is the party who terminates and return j whenever $p_j > q_j$. Otherwise, if $q_j > p_j$, Bob terminates and returns j. So, the question becomes, with what probability with the other party also returns j on a future iteration? Future iterations involve random variables completely independent from u_k , so the probability is simply $\min(p_j, q_j)$.

Putting together both cases, we have that:

$$\Pr[a=b] = \frac{\sum_{i=1}^{n} \min(p_i, q_i)}{\sum_{i=1}^{n} \max(p_i, q_i)} \cdot 1 + \sum_{j=1}^{n} \frac{|p_j - q_j|}{\sum_{i=1}^{n} \max(p_i, q_i)} \cdot \min(p_j, q_j)$$

The final result follows from rearranging and simplifying by applying Equations (4) and (5).

3.2 Gumbel Sampling

The next method we analyze is based on Gumbel sampling, an existing protocol that is widely for sampling from discrete distributions, even when coupling is not necessary. Under various names like PPSWOR, order sampling, and bottom-k sampling, the method has found widespread application across randomized algorithms [Rosén, 1997, Cohen, 2023, Efraimidis and Spirakis, 2006]. We give pseudocode in Protocol 3.

Protocol 3 Gumbel Coupling

Fix public random numbers u_1, \ldots, u_n drawn uniformly from the interval [0, 1]. **Protocol for Alice** (who has probability vector $\mathcal{P} = [p_1, \ldots, p_n]$): 1: Return $a = \operatorname{argmin}_{i \in \{1, \ldots, n\}} \frac{-\ln(u_i)}{p_i}$.

Protocol for Bob (who has probability vector $Q = [q_1, \ldots, q_n]$):

1: Return $b = \operatorname{argmin}_{i \in \{1,\dots,n\}} \frac{-\ln(u_i)}{q_i}$.

Our main result on Gumbel sampling is Theorem 2, which we restate below:

Theorem 2. The communication-free Gumbel coupling method (Protocol 3) samples $a \sim \mathcal{P}$ and $b \sim \mathcal{Q}$ such that:

$$\Pr[a=b] = \sum_{j=1}^{n} \frac{1}{\sum_{i=1}^{n} \max(p_i/p_j, q_i/q_j)} \ge \frac{1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})}{1 + D_{\text{TV}}(\mathcal{P}, \mathcal{Q})}$$

To prove Theorem 2, we require some standard preliminaries about exponential random variables. For a reference, see, e.g. Cohen [2023].

Fact 6 (Properties of Exponential Random Variables). A random variables $X \sim \exp(\lambda)$ is exponential with parameter λ if $x = -\ln(u)/\lambda$ for a random variable u drawn uniformly from [0,1]. Suppose we have independent exponential random variables $X_1 \sim \exp(\lambda_1)$ and $X_2 \sim \exp(\lambda_2)$. Then we have:

- $\Pr[X_1 < X_2] = \frac{\lambda_1}{\lambda_1 + \lambda_2}.$
- $\min(X_1, X_2)$ is an exponential random variable with parameter $\lambda_1 + \lambda_2$.

Proof of Theorem 2. First note that:

$$\Pr[a=b] = \sum_{j=1}^{n} \Pr[a=j \text{ and } b=j].$$

So, we focus on analyzing $\Pr[a = j \text{ and } b = j]$ for a fixed j. We have that a = j and b = j if for all $i \neq j$,

$$\frac{-\ln(u_j)}{p_j} < \frac{-\ln(u_i)}{p_i} \qquad \text{and} \qquad \frac{-\ln(u_j)}{q_j} < \frac{-\ln(u_i)}{q_i}.$$

Equivalently, a = j and b = j if

$$-\ln(u_j) < \min_{i \neq j} \left[-\ln(u_i) \cdot \frac{1}{\max(p_i/p_j, q_i/q_j)} \right]$$

Observe that $-\ln(u_j)$ is an exponential random variable with parameter $\lambda = 1$ and, applying Fact 6, $\min_{i \neq j} \left[-\ln(u_i) \cdot \frac{1}{\max(p_i/p_j, q_i/q_j)} \right]$ is exponential with parameter $\lambda = \sum_{i \neq j} \max(p_i/p_j, q_i/q_j)$. These two random variables are independent, so again by Fact 6:

$$\Pr[a = j \text{ and } b = j] = \frac{1}{1 + \sum_{i \neq j} \max(p_i/p_j, q_i/q_j)}.$$
(7)

To simplify this expression, assume for now that $p_j \leq q_j$. We can make a symmetric argument for the case when $q_j > p_j$. If $p_j \leq q_j$, we have:

$$\Pr[a = j \text{ and } b = j] = \frac{p_j}{p_j + \sum_{i \neq j} \max(p_i, q_i \cdot \frac{p_j}{q_j})} = \frac{p_j}{\sum_{i=1}^n \max(p_i, q_i \cdot \frac{p_j}{q_j})} \ge \frac{p_j}{\sum_{i=1}^n \max(p_i, q_i)}.$$

To obtain the inequality, we use that $p_j/q_j \leq 1$ when $p_j \leq q_j$. Similarly, when $q_j < p_j$, we have that $\Pr[a = j \text{ and } b = j] > \frac{q_j}{\sum_{i=1}^n \max(p_i, q_i)}$. Summing over all j,

$$\Pr[a=b] \ge \frac{\sum_{j=1}^{n} \min(p_j, q_j)}{\sum_{j=1}^{n} \max(p_i, q_j)} = \frac{1 - D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})}{1 + D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})}.$$

4 Optimality of Communication-free Protocols

In the previous section, we showed that two protocols, one based on Weighted MinHash, and the other on Gumbel Sampling, allow Alice and Bob to sample $a \sim \mathcal{P}$ and $b \sim \mathcal{Q}$ without communication in such a way that $\Pr[a = b] \geq \frac{1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})}{1 + D_{\text{TV}}(\mathcal{P}, \mathcal{Q})}$. A natural question is if better protocols exist, especially given that we know we can achieve a bound of $1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$ when communication is allowed. In this section, we show that this is impossible in the worst-case. In particular, we prove the following result, restated from Section 1:

Theorem 3. Consider any protocol that takes as input a distribution and source of public randomness. For any positive integer d, there are distributions \mathcal{P} and \mathcal{Q} with total variation distance $D_{\text{TV}}(\mathcal{P}, \mathcal{Q}) = 1/d$ such that, if Alice runs the protocol to sample $a \sim \mathcal{P}$ and Bob runs the protocol to sample $b \sim \mathcal{Q}$, then:

$$\Pr[a = b] \le \frac{1 - 1/d}{1 + 1/d}.$$

Proof. As a warm up, we first consider a case involving distributions with total variation distance 1/2, i.e., d = 2. We will show that, without communication, it is not possible to achieve $\Pr[a = b] \ge \frac{1-1/2}{1+1/2} = 1/3$. Specifically consider the following distributions \mathcal{P}, \mathcal{Q} and \mathcal{R} , which are each supported on three elements:

$$\begin{bmatrix} p_1 \\ p_2 \\ p_3 \end{bmatrix} = \begin{bmatrix} 1/2 \\ 1/2 \\ 0 \end{bmatrix} \qquad \begin{bmatrix} q_1 \\ q_2 \\ q_3 \end{bmatrix} = \begin{bmatrix} 1/2 \\ 0 \\ 1/2 \end{bmatrix} \qquad \begin{bmatrix} r_1 \\ r_2 \\ r_3 \end{bmatrix} = \begin{bmatrix} 0 \\ 1/2 \\ 1/2 \end{bmatrix}$$

Now, suppose a protocol is used to sample $a \sim \mathcal{P}, b \sim \mathcal{Q}$ and $c \sim \mathcal{R}$. For any $i \in \{1, 2, 3\}$, it must be that one of a, b or c does not equal i, since at least one of the distributions has 0 mass on item i. It follows that only one of the equalities a = b, a = c, and b = c holds at once. So, we have that for any protocol, min($\Pr[a = b], \Pr[a = c], \Pr[b = c] \leq 1/3$. I.e., for two of the distributions, the protocol gives collision probability $\leq 1/3$. The result then follows from simply verifying that that $D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q}) = D_{\mathrm{TV}}(\mathcal{P}, \mathcal{R}) = D_{\mathrm{TV}}(\mathcal{Q}, \mathcal{R}) = 1/2$:

We can generalize this lower bound by having d+1 distributions $\mathcal{P}_1, \ldots, \mathcal{P}_{d+1}$ over $1, \ldots, d+1$. Specifically, let the *i*th distribution, \mathcal{P}_i , be uniform over all $j \neq i$. So, $x \sim \mathcal{P}_i$ has 1/d probability of equaling any $j \neq i$. It can be checked that $D_{\text{TV}}(\mathcal{P}_i, \mathcal{P}_j) = 1/d$ for all i, j.

Now, consider a protocol that samples $x_1 \sim \mathcal{P}_1, \ldots, x_{d+1} \sim \mathcal{P}_{d+1}$. Consider all $\binom{d+1}{2}$ equalities of the form $\{x_i = x_j, i \neq j\}$. No matter what the outcome of x_1, \ldots, x_{d+1} , we claim that at least d of these inequalities will not be satisfied. In particular, as in the argument above, it cannot be that x_1, \ldots, x_d all have the same value v since one of $\mathcal{P}_1, \ldots, \mathcal{P}_{d+1}$ has zero mass for any possible v. As such, at least two items in x_1, \ldots, x_{d+1} must be different from each other. Suppose without loss of generality that $x_1 \neq x_2$.

First, the equality $x_1 = x_2$ is immediately not satisfied. Then for all $j \neq 1, 2$, it must be that either $x_j \neq x_1$ or $x_j \neq x_2$, which is d + 1 - 2 = d - 1 additional inequalities not satisfied. So, no matter what the outcome of the protocol, the ratio of equalities of the form $\{x_i = x_j, i \neq j\}$ that are satisfied is at most:

$$1 - \frac{d}{\binom{d+1}{2}} = 1 - \frac{2}{d+1}.$$

It follows that there must be some pair i, j such that:

$$\Pr[x_i = x_j] \le 1 - \frac{2}{d+1} = \frac{1 - 1/d}{1 + 1/d}.$$

We remark that, in spite of Theorem 3, both Weighted MinHash and Gumbel sampling often perform better in practice than the worst-case bound. For example, in our experiments on speculative decoding in Section 5, Gumbel sampling often nearly matches optimal coupling, obtaining collision probability close to $1 - \mathcal{D}_{TV}(\mathcal{P}, \mathcal{Q})$. Exploring this observation further is an interesting direction for future work.

It maybe be that the bound of Theorem 2 tends to be much stronger for the sort of "quickly decaying" distributions common in applications. As an extreme example, suppose that n = 2, or equivalently, \mathcal{P} and \mathcal{Q} only place mass on two items. Then Gumbel sampling has the same collision probability as that of optimal coupling. To see this, without loss of generality, let $p_1 \leq q_1$, then the result of Theorem 2 simplifies as:

$$\Pr[a=b] = \frac{1}{1+\max\left(\frac{p_1}{p_2},\frac{q_1}{q_2}\right)} + \frac{1}{1+\max\left(\frac{p_2}{p_1},\frac{q_1}{q_1}\right)} = \frac{1}{1+\frac{q_1}{q_2}} + \frac{1}{1+\frac{p_2}{p_1}} = q_2 + p_1 = 1 - D_{\mathrm{TV}}(\mathcal{P},\mathcal{Q}).$$

5 Application: Drafter-Invariant Speculative Decoding

With our main theoretical results in place, in this section we describe an application of communication-free coupling to accelerating autoregression language models, which have demonstrated impressive capabilities across a wide range of language-related tasks [Touvron et al., 2023, OpenAI, 2023, Gemini Team, Google, 2023]. Given a text query q (e.g., a question), the goal of autoregressive language models (LMs) is to generate a sequence of tokens t_1, t_2, \ldots , which correspond to words or word-pieces that comprise an answer or response to the query. At step i of the generation, the LM computes the conditional distribution $Pr(\cdot|q, t_1, \ldots, t_{i-1})$ and the next token is obtained by sampling according to this probability distribution. Computing this next-token distribution requires a forward pass through the neural network at every step i, which has significant computational costs, especially for large models.

Speculative decoding was proposed by Leviathan et al. [2023] and Chen et al. [2023] as a way to accelerate token generation. The method seeks to partially parallelize the process by using an inexpensive approximate distribution (computed using a smaller neural network) to predict, or "draft", the next γ tokens, $t_i, t_{i+1}, \ldots, t_{t+\gamma}$. Let the draft tokens be denoted by $\tilde{t}_i, \tilde{t}_{i+1}, \ldots, \tilde{t}_{t+\gamma}$. The larger neural network (or multiple copies of the network) can compute and sample from the distributions $\Pr(\cdot|q, t_1, \ldots, t_{i-1}, \tilde{t}_i)$, $\Pr(\cdot|q, t_1, \ldots, t_{i-1}, \tilde{t}_i, \tilde{t}_{i+1}), \ldots, \Pr(\cdot|q, t_1, \ldots, t_{i-1}, \tilde{t}_i)$, $\Pr(\cdot|q, t_1, \ldots, t_{i-1}, \tilde{t}_i, \tilde{t}_{i+1})$, $\Pr(\cdot|q, t_1, \ldots, t_{i-1}, \tilde{t}_i)$ in parallel. If \tilde{t}_i matches the token t_i sampled from $\Pr(\cdot|q, t_1, \ldots, t_{i-1})$, then the sample from $\Pr(\cdot|q, t_1, \ldots, t_{i-1}, \tilde{t}_i)$ is a proper sample from the desired large model distribution. Further, if \tilde{t}_{i+1} matches the token t_{i+1} sampled from $\Pr(\cdot|q, t_1, \ldots, t_{i-1}, \tilde{t}_i)$, then, likewise, the sample from $\Pr(\cdot|q, t_1, \ldots, t_{i-1}, \tilde{t}_i, \tilde{t}_{i+1})$ is a valid sample from the large model. Overall, we can obtain k samples in parallel if the first k draft tokens match tokens sampled by the large model. We refer readers to Leviathan et al. [2023] for further details of the method.

In this setting, Bob corresponds to the large, expensive neural network, which knows the "true" distribution \mathcal{Q} and Alice corresponds to the inexpensive neural network, which knows some distribution \mathcal{P} that approximates \mathcal{Q} . We want Alice to sample a token from \mathcal{P} that, with high probability, matches Bob's token sampled from \mathcal{Q} . Alice has to generate her sample before Bob, so the setting inherently does not allow communication from Bob to Alice. However, Alice can in principal communicate information to Bob that can be used when generating his sample. This is exactly what is done in current implementations of speculative decoding: Alice actually communicates the entire distribution she used to sample \tilde{t}_{i+j} , which allows Bob to sample in an optimally coupled way [Leviathan et al., 2023, Algorithm 1].

The end result is that Alice's predictions are accurate with probability exactly equal to $1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$. However, this comes with a potential caveat: the output of the process, depends on both \mathcal{P} and \mathcal{Q} . Hence, if the small "drafter" model changes, the large model output also changes. This is undesirable: as discussed in Section 1, the output of an LM is ideally fixed given a fixed random seed, no matter what optimizations are used to accelerate inference of the network. This property allows for users to easily reproduce results and facilitates easier unit testing and debugging. Naively, speculative sampling destroys this property.

However, the issue is easily fixed: if, instead of an optimal coupling, we use a communication-free protocol to sample from the large model, then necessarily the models output is independent of the drafter model. We call the resulting approach "Drafter-Invariant Speculative Decoding". There is a price to pay for drafter-invariance: by using a communication-free protocol, we can only ensure that the draft tokens are correct with probability $c = \frac{1-D_{\text{TV}}(\mathcal{P},\mathcal{Q})}{1+D_{\text{TV}}(\mathcal{P},\mathcal{Q})}$ instead of $c = 1 - D_{\text{TV}}(\mathcal{P},\mathcal{Q})$. Since the expected number of sequential tokens drafted correctly is $\frac{1}{1-c}$, this could lead to a roughly 2× reduction. Fortunately, as we will see shortly, the no-communication protocols analyzed in Section 3, especially our Gumbel sampling approach, tend to outperform the worst-case bound of Theorem 3 for real-world distributions arising from language models.

5.1 Experimental Evaluation

We used Gumbel sampling to implement Drafter-Invariant Speculative Decoding to accelerate generation of tokens for the 27 billion parameter gemma-2-27b-it model, using the smaller gemma-2-9b-it, and gemma-2-2b-it models as drafters [Gemma Team, Google, 2024]². Table 1 shows that, for Drafter-Invariant Speculative Decoding, the tokens generated by the large model remain the same regardless of the drafter model. In contrast, this is not the case for standard Speculative Decoding, which uses an optimal coupling.

In Figure 2, we also experimentally compare the effectiveness of Gumbel sampling and Weighted MinHash sampling for generating coordinated samples. We issue queries to the gemma-2-27b-it model, then generate a sequence of 32 response tokens using both the full model and the gemma-2-2b-it drafter model. For each token, we have a pair of distributions, Q (the large model's target distribution) and \mathcal{P} (the drafter's approximate distribution). We generate samples $a \sim \mathcal{P}$ and $b \sim Q$ from these distributions using the communication-free coupling protocols. We report the fraction of times that a = b over 20,000 repetitions using different random seeds. This results in 32 plotted points, per query, per method. Since the accuracy of the drafter model varies depending on where we are in the token generation sequence, we can see that the points corresponds to distributions with a fairly wide range of total variation distances.

As we can see in the figure, Gumbel sampling achieves a higher collision probability than Weighted Min-Hash, across all queries and tokens. Both methods typically outperform the worst-case bound of $\frac{1-D_{\text{TV}}(\mathcal{P},\mathcal{Q})}{1+D_{\text{TV}}(\mathcal{P},\mathcal{Q})}$

²https://huggingface.co/docs/transformers/en/model_doc/gemma2

	Speculative Decoding			
	Drafter-Dependent (standard)		Drafter-Invariant (ours)	
No Drafter	Drafter: Gemma 9B	Drafter: Gemma 2B	Drafter: Gemma 9B	Drafter: Gemma 2B
Yes	Yes	Yes	Yes	Yes
	Typically	**	It	No
some	often	NP-hard	some	some
	often	NP-hard	\mathbf{but}	NP
NP-hard	within	problems	NP-hard	NP-hard
	with	problems	NP-hard	NP-hard
problems	a	often	problems	problems
	a	can	problems	problems
have	bounded	have	have	have
	prov	have	can	can
efficient	factor	efficient	efficient	efficient
	factor	efficient	efficient	fast
approximation	of	approximation	approximation	approximation
	of	approximation	approximation	approximations
algorithms.	the	algorithms.	algorithms.	algorithms.
	${ m the}$	algorithms.	algorithms.	algorithms.
<eos></eos>	optimal	<eos></eos>	<eos></eos>	<eos></eos>
	optimal	<eos></eos>	<eos></eos>	<eos></eos>
	solution.			
-	solution.	-	-	-

Table 1: We applied standard Speculative Decoding [Leviathan et al., 2023] and our Drafter-Invariant Speculative Decoding method to a 27 billion parameter Gemma model [Gemma Team, Google, 2024] to generate responses to the query: "Can NP-hard problems be approximated efficiently?". Smaller 9 and 2 billion parameter Gemma models were used as drafters. The table show the tokens returned by the large model, as well as the draft tokens proposed by the smaller models (displayed below). If the draft token matches the large model, it is shown in blue; otherwise, it is show in red. As we can see, Drafter-Invariant Speculative Decoding always results in a response of "Yes some NP-hard problems have efficient approximation algorithms.", no matter what drafter is used. In contrast, standard Speculative Decoding leads to three different responses depending on the drafter.

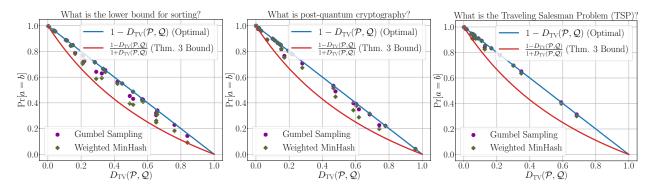


Figure 2: This plot illustrates the effectiveness of Gumbel and Weighted MinHash sampling for coupling samples. For each subplot, we obtain 32 pairs of distributions $(\mathcal{P}, \mathcal{Q})$ by generating 32 response tokens for a given query using two different language models: the 27 billion parameter Gemma 27B model and the smaller Gemma 2B model. We sample $a \sim \mathcal{P}$ and $b \sim \mathcal{Q}$ 20,000 times using the no-communication protocols, and plot the empirical probability that a = b vs. the total variation distance between \mathcal{P} and \mathcal{Q} . For reference, we also plot the best possible probability that $a = b, 1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$, as well as our bound from Theorem 3.

proven in Theorem 3, often nearly matching the best possible collision probability of $1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$.

6 Coupling with Low-Communication

We conclude by considering a relaxed version of the communication-free coupling problem that allows for *limited communication*. In particular, Theorem 3 proves that there is a gap between communication-free protocols and the communication-intensive protocol from Protocol 1, where Alice sends her entire distribution to Bob. It is natural to ask what lies in between. Concretely, how many bits of communication are needed to match the optimal $1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$ collision probability of Protocol 1?

Our main result on this question is Theorem 4, which we restated below:

Theorem 4. There is a protocol that, for any $\epsilon \in (0,1)$, requires $O(\log(n/\epsilon))$ bits of communication in expectation between Alice and Bob to produce samples $a \sim \mathcal{P}$, $b \sim \mathcal{Q}$ such that:

$$\Pr[a=b] \ge 1 - D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q}) - \epsilon.$$

To prove Theorem 4, we first introduce an "idealized" communication protocol, Protocol 4, that proceeds in rounds. At each round, Alice and Bob communicate at most one index consisting of $O(\log n)$ bits, and one probability, i.e., a real-valued number in the interval [0, 1]. We show that this protocol terminates with an expected constant number of steps. We then show how to appropriately discretize Alice and Bob's distributions in a pre-processing step so that the probability can be communicated with $O(\log(n/\epsilon))$ bits. The same discretization strategy can be used to give a concrete communication complexity bound for Protocol 1, which naively requires communicating real-valued probabilities. The result would be a protocol requiring $O(n \log(n/\epsilon))$ bits of communication. Theorem 4 offers and exponential improvement on this baseline.

Protocol 4 Low Communication Coupling

```
Fix public random numbers u_0, u_1, \ldots drawn uniformly from the interval [0, 1].
Protocol for Alice (who has probability vector \mathcal{P} = [p_1, \ldots, p_n]):
 1: Sample a \sim \mathcal{P} and send (a, p_a) to Bob.
 2: Await Bob's response.
 3: if Bob sends reject then
         for k = 1, 2, ... do
 4:
             Await (j, w) from Bob.
 5:
             Send approve to Bob if p_i < u_k - w, send reject otherwise.
 6:
 7: Return a.
Protocol for Bob (who has probability vector Q = [q_1, \ldots, q_n]):
 1: Receive (a, p_a) from Alice.
2: if u_0 \le \min\left(\frac{q_a}{p_a}, 1\right) then
        Send approve to Alice.
 3:
         Return b = a.
 4:
 5: else
 6:
         Send reject to Alice.
         for k = 1, 2, ... do
 7:
            Find j such that \sum_{t=1}^{j-1} q_t \leq u_k < \sum_{t=1}^{j} q_t and send (j, \sum_{t=1}^{j-1} q_t) to Alice.
 8:
             Await Alice's response.
 9:
             if Alice sends approve then
10:
11:
                 Return b = j
```

Idealized Protocol. We begin by analyzing our idealized protocol, Protocol 4. It is based on a modification of the optimal coupling method, Protocol 1. While Protocol 1 naively requires communicating Alice's entire distribution, \mathcal{P} , to Bob, we can see that \mathcal{P} only becomes necessary if Bob "rejects" the item *a* that he receives from Alice. In particular, upon rejectionm he must sample from a distribution \mathcal{Q}' that depends on \mathcal{P} .




Figure 3: Two probability distributions, \mathcal{P} (red) and \mathcal{Q} (blue), are depicted in this diagram. The area where $q_i > p_i$ is highlighted with a hatch pattern. In the first round of Protocol 4, Alice samples an item proportional to \mathcal{P} . Using rejection sampling, Bob decides whether to accept or reject the item. If rejected, Bob attempts to draw a random number that "hits" the hatched regions where q_i exceeds p_i .

Protocol 4 implements this "post-rejection" step in a more communication efficient way by using a dartthrowing approach similar to Weighted MinHash. Specifically, Bob attempts to sample from regions of the number line where $q_j > p_j$, as illustrated by the hatched regions in Figure 3. A uniform sample from these regions amounts to a sample from Q'. To obtain such a sample, Bob throws a dart and, if it lands in the region $[j-1, j-1+q_j]$ for some j, he sends the dart to Alice to verify that it also lies above $j-1+p_j$. If it does, then the dart has landed in the hatched region, so they terminate the process. If not, Bob tries again. We prove that the number of rounds required for the process to terminate is constant in expectation:

Claim 7. If Alice and Bob use Protocol 4 to produce samples $a \sim \mathcal{P}$ and $b \sim \mathcal{Q}$, then:

$$\Pr[a=b] = 1 - D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})$$

Furthermore, the expected number of messages before the protocol terminates is 2.

Proof. Let a and b be the indices returned by Alice and Bob at the end of the protocol. We first prove that $a \sim \mathcal{P}$, $b \sim \mathcal{Q}$, and $\Pr[a = b] = 1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$. The fact that $a \sim \mathcal{P}$ is immediate, since Alice starts by choosing $a \sim \mathcal{P}$ and then never changes a's value. Alice's selection is communicated to Bob, who then decides to either accept or reject a. Bob accepts with probability min $\left(\frac{q_a}{p_a}, 1\right)$. So, fixing an index i, we have:

$$\Pr[a = b = i] = p_i \cdot \min\left(\frac{q_i}{p_i}, 1\right) = \min(q_i, p_i).$$

Summing over all i we conclude that

$$\Pr[a=b] = \sum_{i=1}^{n} \Pr[a=b=i] = \sum_{i=1}^{n} \min(p_i, q_i) = 1 - D_{\text{TV}}(\mathcal{P}, \mathcal{Q}).$$

Now, if Bob rejects a at Line 6, he must select another value $j \neq a$. The probability of selecting j given the rejection of a is:

$$\Pr[b = j \mid \text{Bob rejects } a] = \frac{q_j - \min(p_j, q_j)}{\sum_{k=1}^n q_k - \min(p_k, q_k)}.$$

The bottom of the fraction above is exactly the probability that Bob rejects at Line 6, so overall, $\Pr[b = j] = \Pr[b = j \mid b = a] + \Pr[b = j \mid b \neq a] = \min(q_j, p_j) + q_j - \min(q_j, p_j) = q_j$, as desired.

Next, we bound the round complexity of Protocol 4. Bob's process involves a dart-throwing mechanism where each throw is aimed at hitting a region representative of the excess probability mass of q_j over p_j . The chance of hitting the correct region per trial, shown as the hatched area in the Figure 3, is equal to the total variation distance, $D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$.

$$\sum_{j=1}^{n} q_j - \min(p_j, q_j) = \sum_{j=1}^{n} q_j - \sum_{j=1}^{n} \min(p_j, q_j) = 1 - (1 - D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})) = D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q}).$$

Each throw is independent, and the expected number of throws needed to hit the target region is geometrically distributed with a success probability of $D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$. Therefore, the expected number of throws needed is $\frac{1}{D_{\text{TV}}(\mathcal{P}, \mathcal{Q})}$. Bob's dart throwing procedure is only used if *a* is rejected at Line 6 of Bob's protocol, which happens with probability $D_{\text{TV}}(\mathcal{P}, \mathcal{Q})$. So, the expected number of communication rounds between Alice and Bob, denoted by $\mathbb{E}[c]$, is:

$$\mathbb{E}[c] = \Pr[a=b] \cdot 1 + \Pr[a \neq b] \cdot \frac{1}{D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})} = 1 + D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q}) \cdot \frac{1}{D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q})} = 2.$$

With Claim 7 in place, we are almost ready to prove Theorem 4. The only issue is that Protocol 4 must communicate probabilities, which could be arbitrarily precise real numbers, and thus require an unbounded number of bits to represent. To avoid this issue, we need to discretize \mathcal{P} and \mathcal{Q} using Algorithm 1, to form distributions \mathcal{P}' and \mathcal{Q}' , where each probability is a multiple of $\frac{\epsilon}{n}$ for a given small ϵ . This quantization allows us to communicate the probabilities using just $O(\log(n/\epsilon))$ bits.

Algorithm 1 Distribution Discretization

Input: Original distribution $\mathcal{P} = \{p_1, \dots, p_n\}$, precision parameter ϵ , and size n. **Output:** Distribution $\mathcal{P}' = \{p'_1, \dots, p'_n\}$ where each p'_i is a multiple of ϵ/n . 1: for $p_i \in \mathcal{P}$ do 2: Set p'_i equal to p_i rounded down to the nearest multiple of $\frac{\epsilon}{n}$. 3: Set $r \leftarrow (1 - \sum_{i=1}^{n} p'_i)$. 4: Set $p'_1 \leftarrow p'_1 + r$. \triangleright This step ensures that $\sum_{i=1}^{n} p'_i = 1$.

Lemma 8. For any distributions \mathcal{P} and \mathcal{Q} over $\{1, \ldots, n\}$, if we apply Algorithm 1 with parameters ϵ , n to get distributions \mathcal{P}' and \mathcal{Q}' , then we have:

$$D_{\mathrm{TV}}(\mathcal{P}, \mathcal{P}') \leq \epsilon, \qquad D_{\mathrm{TV}}(\mathcal{Q}, \mathcal{Q}') \leq \epsilon, \qquad and \qquad D_{\mathrm{TV}}(\mathcal{P}', \mathcal{Q}') \leq D_{\mathrm{TV}}(\mathcal{P}, \mathcal{Q}) + 2\epsilon.$$

Proof. First, consider \mathcal{P} . Let r be as in Line 3 of Algorithm 1. We have:

$$r = 1 - \sum_{i=1}^{n} p'_i \le 1 - \sum_{i=1}^{n} \left(\frac{p_i}{\frac{\epsilon}{n}} - 1\right) \cdot \frac{\epsilon}{n} = 1 - \sum_{i=1}^{n} \left(p_i - \frac{\epsilon}{n}\right) = \sum_{i=1}^{n} \frac{\epsilon}{n} = \epsilon.$$

We can then bound the total variation distance between \mathcal{P} and \mathcal{P}' as:

$$D_{\mathrm{TV}}(\mathcal{P}, \mathcal{P}') = \frac{1}{2} \sum_{i=1}^{n} |p_i - p'_i| \le \frac{1}{2} \cdot 2r \le \epsilon.$$

We can similarly demonstrate that $D_{\text{TV}}(\mathcal{Q}, \mathcal{Q}') < \epsilon$. Finally, the last bound follows from triangle inequality:

$$D_{\mathrm{TV}}(\mathcal{P}',\mathcal{Q}') \le D_{\mathrm{TV}}(\mathcal{P}',\mathcal{P}) + D_{\mathrm{TV}}(\mathcal{P},\mathcal{Q}) + D_{\mathrm{TV}}(\mathcal{Q},\mathcal{Q}') \le D_{\mathrm{TV}}(\mathcal{P},\mathcal{Q}) + 2\epsilon \qquad \Box$$

Our final approach will be for Alice and Bob to run Protocol 4 on the distributions \mathcal{P}' and \mathcal{Q}' instead of \mathcal{P} and \mathcal{Q} . This produces samples $a \sim \mathcal{P}', b \sim \mathcal{Q}'$ instead of $a \sim \mathcal{P}, b \sim \mathcal{Q}$, as required. To correct the distributions of the samples, Alice and Bob simply use an optimal coupling between \mathcal{P} and \mathcal{P}' and between \mathcal{Q} and \mathcal{Q}' . These couplings can be computed locally, without any communication.

Proof of Theorem 4. Alice and Bob round their distributions using Algorithm 1 with parameter $\epsilon/4$ to obtain \mathcal{P}' and \mathcal{Q}' . They then run Protocol 4 with \mathcal{P}' and \mathcal{Q}' to obtain $a' \sim \mathcal{P}'$ and $b' \sim \mathcal{Q}'$ such that $\Pr[a' = b'] \geq 1 - D_{\text{TV}}(\mathcal{P}', \mathcal{Q}')$. They each separately apply Protocol 1 to obtain samples $a \sim \mathcal{P}$ and $b \sim \mathcal{Q}$ such that $\Pr[a = a'] \geq 1 - D_{\text{TV}}(\mathcal{P}, \mathcal{P}')$ and $\Pr[b = b'] \geq 1 - D_{\text{TV}}(\mathcal{Q}, \mathcal{Q}')$. Overall, we have:

$$Pr[a = b] \ge Pr[a = a' \text{ and } a' = b' \text{ and } b = b']$$

$$\ge 1 - D_{TV}(\mathcal{P}, \mathcal{P}') - D_{TV}(\mathcal{Q}', \mathcal{P}') - D_{TV}(\mathcal{Q}, \mathcal{Q}') \qquad \text{(by a union bound)}$$

$$\ge 1 - D_{TV}(\mathcal{P}, \mathcal{Q}) - 4 \cdot \epsilon/4 \qquad \text{(by Lemma 8)}$$

$$= 1 - D_{TV}(\mathcal{P}, \mathcal{Q}) - \epsilon.$$

The total communication cost is that of running Protocol 4 with \mathcal{P}' and \mathcal{Q}' . Each round of this protocol requires communicating an index, which takes $O(\log n)$ bits, and a probability, which takes $O(\log(n/\epsilon))$ bits (since all probabilities are integer multiples of $\epsilon/4n$). By Claim 7, the protocol terminates after a constant number of rounds in expectation, so in total, we need $O(\log(n/\epsilon))$ bits of communication, in expectation. \Box

Acknowledgement

This work was partially support by NSF Grant #2106888.

References

- Aline Bessa, Majid Daliri, Juliana Freire, Cameron Musco, Christopher Musco, Aécio Santos, and Haoxiang Zhang. Weighted minwise hashing beats linear sketching for inner product estimation. In Proceedings of the 42nd Symposium on Principles of Database Systems (PODS), 2023.
- Kevin Beyer, Peter J. Haas, Berthold Reinwald, Yannis Sismanis, and Rainer Gemulla. On synopses for distinct-value estimation under multiset operations. In Proceedings of the 2007 ACM SIGMOD International Conference on Management of Data, pages 199–210, 2007.
- Andrei Z. Broder. On the resemblance and containment of documents. In Proceedings. Compression and Complexity of SEQUENCES, pages 21–29, 1997.
- Andrei Z. Broder, Moses Charikar, Alan M. Frieze, and Michael Mitzenmacher. Min-wise independent permutations (extended abstract). In Proceedings of the 30th Annual ACM Symposium on Theory of Computing (STOC), pages 327–336, 1998.
- Charlie Chen, Sebastian Borgeaud, Geoffrey Irving, Jean-Baptiste Lespiau, Laurent Sifre, and John Jumper. Accelerating large language model decoding with speculative sampling. *arXiv:2302.01318*, 2023.
- Tobias Christiani. DartMinHash: Fast sketching for weighted sets. arXiv:2005.11547, 2020.
- Edith Cohen. Size-estimation framework with applications to transitive closure and reachability. J. Comput. Syst. Sci., 55(3):441–453, 1997.
- Edith Cohen. Stream sampling for frequency cap statistics. In Proceedings of the 21st ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD), pages 159–168, 2015.
- Edith Cohen. Sampling big ideas in query optimization. In Proceedings of the 42nd Symposium on Principles of Database Systems (PODS), 2023.
- Edith Cohen and Haim Kaplan. Summarizing data using bottom-k sketches. In Proceedings of the 2007 ACM Symposium on Principles of Distributed Computing (PODC), pages 225–234, 2007.
- Majid Daliri, Juliana Freire, Christopher Musco, Aécio Santos, and Haoxiang Zhang. Sampling methods for inner product sketching. *Proc. VLDB Endow.*, 2024a.
- Majid Daliri, Juliana Freire, Christopher Musco, Aécio Santos, and Haoxiang Zhang. Simple analysis of priority sampling. Proceedings of the 7th Symposium on Simplicity in Algorithms (SOSA), 2024b.
- Nick Duffield, Carsten Lund, and Mikkel Thorup. Flow sampling under hard resource constraints. In Proceedings of the Joint International Conference on Measurement and Modeling of Computer Systems (SIGMETRICS), pages 85–96, 2004.
- Nick Duffield, Carsten Lund, and Mikkel Thorup. Learn more, sample less: control of volume and variance in network measurement. *IEEE Transactions on Information Theory*, 51(5):1756–1775, 2005.
- Pavlos S. Efraimidis and Paul G. Spirakis. Weighted random sampling with a reservoir. Information Processing Letters, 97(5):181–185, 2006.

- C. Estan and J.F. Naughton. End-biased samples for join cardinality estimation. In *Proceedings of the 22nd IEEE International Conference on Data Engineering (ICDE)*, 2006.
- Philippe Flajolet. On adaptive sampling. Computing, 43(4):391–400, 1990.
- Gemini Team, Google. Gemini: a family of highly capable multimodal models. arXiv:2312.11805, 2023.
- Gemma Team, Google. Gemma 2: Improving open language models at a practical size. *arXiv:2408.00118*, 2024.
- Emil Julius Gumbel. Les valeurs extrêmes des distributions statistiques. In Annales de l'institut Henri Poincaré, volume 5, pages 115–158, 1935.
- Bernhard Haeupler, Mark Manasse, and Kunal Talwar. Consistent weighted sampling made fast, small, and easy. *arXiv:1410.4266*, 2014.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Oriol Vinyals, Jack W. Rae, and Laurent Sifre. Training compute-optimal large language models. In Advances in Neural Information Processing Systems 35 (NeurIPS), 2022.
- Iris A. M. Huijben, Wouter Kool, Max B. Paulus, and Ruud G. van Sloun. A review of the Gumbel-max trick and its extensions for discrete stochasticity in machine learning. *IEEE Transactions on Pattern Analysis* and Machine Intelligence, 45(02):1353–1371, 2023.
- Sergey Ioffe. Improved consistent sampling, weighted minhash and 11 sketching. In Proceedings of the 2010 IEEE International Conference on Data Mining (ICDM), pages 246–255, 2010.
- Wouter Kool, Herke Van Hoof, and Max Welling. Stochastic beams and where to find them: The gumbel-topk trick for sampling sequences without replacement. In *Proceedings of the 36th International Conference* on Machine Learning (ICML), pages 3499–3508. PMLR, 2019.
- Yaniv Leviathan, Matan Kalman, and Yossi Matias. Fast inference from transformers via speculative decoding. In Proceedings of the 40th International Conference on Machine Learning (ICML), 2023.
- Ping Li. Linearized GMM kernels and normalized random fourier features. In Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD), pages 315–324, 2017.
- Ping Li, Kenneth Church, and Trevor Hastie. Conditional random sampling: A sketch-based sampling technique for sparse data. In Advances in Neural Information Processing Systems 19 (NeurIPS), volume 19, 2006.
- Chris J. Maddison, Daniel Tarlow, and Tom Minka. A* sampling. In Advances in Neural Information Processing Systems 27 (NeurIPS), pages 3086–3094, 2014.
- Mark Manasse, Frank McSherry, and Kunal Talwar. Consistent weighted sampling. Technical Report MSR-TR-2010-73, Microsoft Research, 2010.
- OpenAI. GPT-4 technical report. arXiv:2303.08774, 2023.
- Bengt Rosén. Asymptotic theory for order sampling. *Journal of Statistical Planning and Inference*, 62(2): 135–158, 1997.
- Anshumali Shrivastava. Simple and efficient weighted minwise hashing. In Advances in Neural Information Processing Systems 29 (NeurIPS), 2016.
- Ziteng Sun, Ananda Theertha Suresh, Jae Hun Ro, Ahmad Beirami, Himanshu Jain, and Felix Yu. SpecTr: Fast speculative decoding via optimal transport. In *Advances in Neural Information Processing Systems* 36 (NeurIPS), 2023.

- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. arXiv:2302.13971, 2023.
- Wei Wu, Bin Li, Ling Chen, Junbin Gao, and Chengqi Zhang. A review for weighted MinHash algorithms. *IEEE Trans. Knowl. Data Eng.*, 2020.
- Yihong Wu. Information-theoretic methods for high-dimensional statistics. Lecture notes, Yale University, New Haven, CT, 2020.
- Zixuan Zhou, Xuefei Ning, Ke Hong, Tianyu Fu, Jiaming Xu, Shiyao Li, Yuming Lou, Luning Wang, Zhihang Yuan, Xiuhong Li, et al. A survey on efficient inference for large language models. *arXiv:2404.14294*, 2024.