Towards Practical Human Motion Prediction with LiDAR Point Clouds

Xiao Han ShanghaiTech University Shanghai, China hanxiao2022@shanghaitech.edu.cn Yiming Ren ShanghaiTech University Shanghai, China renym1@shanghaitech.edu.cn

Yichen Yao ShanghaiTech University Shanghai, China yaoych2023@shanghaitech.edu.cn

Yujing Sun The University of Hong Kong Hong Kong, China yjsun@cs.hku.hk Yuexin Ma* ShanghaiTech University Shanghai, China mayuexin@shanghaitech.edu.cn

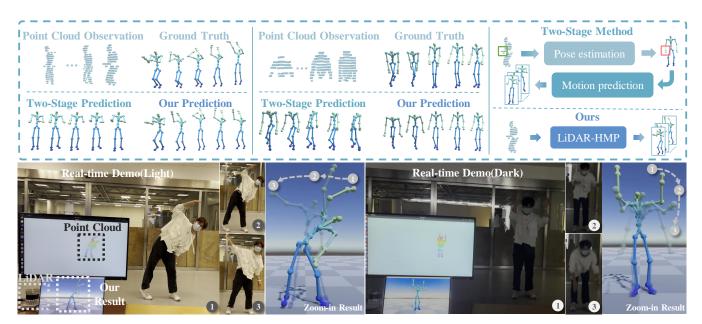


Figure 1: Visualization of our motion prediction performance. The top figure demonstrates the comparison of our LiDAR-HMP and two-stage method on LIPD test set. The bottom figure highlights LiDAR-HMP's practicality in real-world deployment, unfettered by lighting conditions, where markers 1, 2, and 3 indicate the current moment and predicted poses for the future 0.4s and 1.0s, respectively. With online captured LiDAR point cloud, our method achieves real-time promising prediction results, which is significant for real-world applications.

Abstract

Human motion prediction is crucial for human-centric multimedia understanding and interacting. Current methods typically rely on ground truth human poses as observed input, which is not

MM '24, October 28-November 1, 2024, Melbourne, VIC, Australia

https://doi.org/10.1145/3664647.3680720

practical for real-world scenarios where only raw visual sensor data is available. To implement these methods in practice, a prephrase of pose estimation is essential. However, such two-stage approaches often lead to performance degradation due to the accumulation of errors. Moreover, reducing raw visual data to sparse keypoint representations significantly diminishes the density of information, resulting in the loss of fine-grained features. In this paper, we propose *LiDAR-HMP*, the first single-LiDAR-based 3D human motion prediction approach, which receives the raw Li-DAR point cloud as input and forecasts future 3D human poses directly. Building upon our novel structure-aware body feature descriptor, LiDAR-HMP adaptively maps the observed motion manifold to future poses and effectively models the spatial-temporal correlations of human motions for further refinement of prediction results. Extensive experiments show that our method achieves

^{*}Corresponding author. This work was supported by NSFC (No.62206173), Natural Science Foundation of Shanghai (No.22dz1201900), Shanghai Sailing Program (No.22YF1428700), MoE Key Laboratory of Intelligent Perception and Human-Machine Collaboration (ShanghaiTech University), Shanghai Frontiers Science Center of Humancentered Artificial Intelligence (ShangHAI).

This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

^{© 2024} Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-0686-8/24/10

state-of-the-art performance on two public benchmarks and demonstrates remarkable robustness and efficacy in real-world deployments. https://4dvlab.github.io/project_page/LiDARHMP.html

CCS Concepts

• Computing methodologies \rightarrow Temporal reasoning; Activity recognition and understanding.

Keywords

Human motion prediction, Multimedia understanding, LiDAR point cloud

ACM Reference Format:

Xiao Han, Yiming Ren, Yichen Yao, Yujing Sun, and Yuexin Ma. 2024. Towards Practical Human Motion Prediction with LiDAR Point Clouds. In Proceedings of the 32nd ACM International Conference on Multimedia (MM '24), October 28-November 1, 2024, Melbourne, VIC, Australia. ACM, New York, NY, USA, 13 pages. https://doi.org/10.1145/3664647.3680720

1 Introduction

Bridging the gap between human actions and digital interactions, human motion prediction stands as a pivotal innovation in the ever-evolving field of multimedia. By accurately predicting future human movements through the analysis of past motion sequences, people are able to create multimedia content that is more intuitive, responsive, and engaging. For instance, fitness apps can offer personalized guidance and feedback in real-time based on the predicted future movements of their users. Assistive robots can predict human intentions and proactively handover objects to users as they reach out, instead of waiting until they stop moving.

Current human motion prediction methods [1, 13, 30, 44, 46, 51, 53, 54, 61] have achieved remarkable success by explicitly modeling the inherent body structural and dynamic features among sequential human skeletons. However, these approaches heavily rely on precise historical human poses, necessitating complex setups like multi-view cameras or densely deployed wearable IMUs, thus imposing substantial limitations on their practical application and deployment. In multimedia applications such as augmented reality(AR) environments, the system is expected to interpret human actions and gestures in real-time using their onboard sensors, with raw data often comprising images or point clouds from a single viewpoint. The dependency on the accuracy of past motion estimation techniques [18, 23, 42, 52, 59, 64] leads to cumulative errors as shown in the upper-right corner of Fig. 1 and the loss of fine-grained features present in the raw visual data. To advance practical human motion prediction, directly taking the raw visual data as input is a more viable strategy. Some studies [45, 60] have investigated video inputs to improve applicability, the absence of precise depth information and sensitivity to lighting conditions frequently results in ambiguous and inconsistent predictions in unconstrained environments.

In recent years, LiDAR's long-range depth-sensing and lightinsensitive capabilities have established it as an indispensable sensor in the realm of autonomous driving [4, 24, 35, 50] and various human-centric applications [18, 22, 42, 43, 62], such as 3D pose estimation, human motion capture, gait recognition, action recognition, etc. Studies in these areas have underscored the superiority of LiDAR over traditional cameras, highlighting its robustness and effectiveness due to its ability to provide precise 3D geometry and dynamic motion information about humans in free environment. Crucially, LiDAR is not affected by lighting conditions, presenting a significant advantage for real-world deployment. Based on this, we introduce *LiDAR-HMP*, the first LiDAR-based human motion prediction solution, which directly predicts future human poses from raw LiDAR point clouds and is more practical for real-world multimedia applications.

Our approach is founded on three carefully crafted modules that effectively harness the valuable information contained within the raw point cloud input, enabling precise predictions of future human motion as shown in Fig. 1. Firstly, the Structure-aware Body Feature Descriptor delves into the implicit semantics of human body structure entailed by the point cloud observation, amalgamating part-wise with global body features. This ensures a rich, detailed representation of human structure essential for accurate motion forecasting. Following this, our Adaptive Motion Latent Mapping module employs a set of learnable queries, each mapping to a future motion frame. These queries dynamically extract critical information from the observed point cloud frames, laying the foundation for precise motion prediction. Finally, the Spatial-Temporal Correlations Refinement module embeds coarse motion predictions and part-wise body features into a high-dimensional space. Leveraging spatial-temporal correlations among the predicted poses, it meticulously refines the predicted keypoints, enhancing the prediction accuracy. Together, these modules embody our design philosophy of capturing both the spatial structure and temporal dynamics of human motion, setting a new benchmark for LiDAR-based human motion prediction in real-world robotic applications.

Notably, acknowledging the inherent unpredictability and potential for sudden changes in human movement, we extend our model to support diverse motion predictions [10, 25, 29, 34, 58], thus broadening its applicability and enhancing predictive reliability and robustness. Our experimental results and visual analysis both indicate that diverse predictions not only enhance the robustness and reliability of forecasts but also offer invaluable insights for applications requiring an in-depth understanding of human dynamics. For instance, in interactive systems and autonomous navigation, the ability to predict a range of potential motions can significantly improve the decision-making process.

We conduct experiments on both short-term and long-term human motion prediction on two public LiDAR-based human motion datasets, including LiDARHuman26M [18] and LIPD [62]. Our method significantly outperforms existing methods in terms of mean per joint position error (MPJPE) by a large margin, e.g. average 17.42mm and 7.86mm for short-term prediction, and average 11.62mm and 9.12mm for long-term prediction, respectively. We also evaluate the robustness and generalization ability of our method under long-range distance, occluded and noisy cases. In particular, we have deployed our method in real scenarios and achieved real-time human motion predictions, providing a feasible interface for further robotic applications. Our contributions can be summarized as follows:

• We propose the first LiDAR-based method for practical 3D human motion prediction by fully utilizing the fine-grained

motion details in raw LiDAR point clouds, which closely aligns with real-world application scenarios.

- We present a structure-aware body feature descriptor that decouples the holistic human point cloud into distinct body parts based on the semantics of anatomical structure, enabling the capture of fine-grained dynamic motion details.
- We map the past motion manifold to the future motion manifold adaptively, and fully leverage the spatial-temporal correlation of the motions to further refine the predicted results.
- Our method achieves state-of-the-art performance on two public LiDAR-based human motion datasets.

2 Related Work

2.1 Human Motion Prediction

Existing human motion prediction methods focus on forecasting future human motions based on past ground truth observations captured through multi-view cameras or dense IMUs, with specialized network structures to address the spatial and temporal dependencies in structured skeleton sequences. Several methods [12, 14, 17, 26, 33, 54] have explored modeling temporal dependencies in human motion prediction using RNN and TCN structures, but often overlook spatial relationships. Recent advancements [3, 9, 20, 49, 61] have seen GCNs achieving state-of-the-art results by learning spatial dependencies among joints with learnable weights. Building on the GCN framework, DMGNN [20] and MSR-GCN [9] introduced multi-scale body graphs to capture both local and global spatial features. PGBIG [30] extended this approach by incorporating temporal graph convolutions for extracting spatial-temporal features. SPGSN [19] introduced a graph scattering network to enhance the modeling of temporal dependencies through multiple graph spectrum bands. DMAG [13] uses frequency decomposition and feature aggregation respectively to encode the information. Beyond GCN-based approaches, transformer architectures [1, 2, 32] also have been utilized to model pair-wise spatialtemporal dependencies, indicating a broad interest in capturing complex spatial-temporal relationships in human motion prediction. AuxFormer [53] introduced a model learning framework with an auxiliary task that can recover corrupted coordinates depending on the rest coordinates. [51] synthesizes the modeling ability of the self-attention mechanism and the effectiveness of graph neural networks. However, these methods are primarily designed for inputs of ground truth observed skeletons and showed performance degradation with inputs of estimated skeletons from 3D pose estimation methods [15, 18, 23, 27, 36, 42, 52, 59, 64] due to accumulative errors, restricting their real-world applicability. Although some studies [45, 60] have explored the use of video inputs to enhance practical applicability, the absence of precise depth information and sensitivity to lighting changes frequently result in ambiguous and inconsistent predictions in uncontrolled settings.

2.2 LiDAR-based Human-centric Applications

Due to the accurate depth sensing and light-insensitive ability in long-range scenes, LiDAR has emerged as a pivotal perception sensor for robots and autonomous driving [4, 16, 24, 28, 35, 37, 38, 50,

57, 63]. In recent years, numerous human-centric applications[5– 8, 18, 22, 41–43, 55, 56, 62], such as pose estimation, motion capture, action recognition, gait recognition, scene reconstruction, etc., have adopted LiDAR to expand usage scenarios and improve performance of solutions by utilizing accurate geometric characteristics of LiDAR point clouds. Especially, recent works [18, 42, 62] have already underscored the efficacy of single-LiDAR systems for human motion capture. Given LiDAR's success in large-scale humanrelated applications, we make the first attempt to leverage LiDAR for practical 3D human motion predictions by fully exploiting the dynamic spatial-temporal correlations among observed sequential LiDAR point clouds.

3 Methodology

In this section, we introduce the details of our single-LiDAR-based 3D human motion prediction method LiDAR-HMP. After defining the problem in Sec.3.1, we introduce our components sequentially. In Sec.3.2, we introduce Structure-aware Body Feature Descriptor to extract comprehensive human features. Subsequently, in Sec.3.3, we employ Adaptive Motion Latent Mapping to facilitate dynamic interactions crucial for accurate motion prediction. Upon obtaining the initial predicted 3D skeleton joints, the Spatial-temporal Correlations Refinement module (Sec.3.4) further refines the correlations between different body joints. Finally, Sec.3.5 outlines the decoding and supervision of the network, while Sec.3.6 demonstrates the potential of our methods across various settings.

3.1 **Problem Definition**

3D human motion prediction involves forecasting 3D human motion poses for the next few frames based on a few observed frames. Let $\mathbf{P}_{1:T_o} = \{P_1, P_2, \dots, P_{T_o}\}$ represent the historical point cloud observation of length T_o , where P_t denotes the point cloud frame at time t. Additionally, denote $\mathbf{J}_{T_o+1:T_o+T_p} = \{J_{T_o+1}, J_{T_o+2}, \dots, J_{T_o+T_p}\}$ as the predicted 3D pose sequence of length T_p . Here $J_t \in \mathbb{R}^{24\times 3}$ signifies the future human pose of time t, represented by 24 3D keypoint coordinates. Our approach aims to predict the T_p frames of future 3D human motion poses from the T_o observed frames of human LiDAR point clouds.

3.2 Structure-aware Body Feature Descriptor

Contrary to the inherently structured skeleton-based human motion representations, the sparse and disordered nature of LiDAR point clouds pose substantial challenges for efficient feature extraction. Existing methods in human-focused research [42, 62] commonly adopt PointNet [39] to extract bodily features from point clouds, using max pooling to distill key features from the LiDAR data. While efficient and widely applied in existing LiDAR-based human analytics, such an approach overlooks the rich geometric and structural details in the 3D point cloud data, which are essential for deriving expressive features that accurately represent human body structure. To overcome these limitations, we introduce the Structure-aware Body Feature Descriptor. Our approach combines the holistic global feature of the entire body with detailed local features that capture the semantics of anatomical body parts, including the thigh, calf, arm, and more. This decomposition enables

MM '24, October 28-November 1, 2024, Melbourne, VIC, Australia

Xiao Han et al

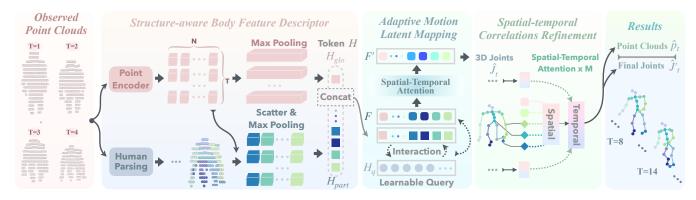


Figure 2: The pipeline of our LiDAR-HMP. First, we obtain the structure-aware body feature descriptor from the observed LiDAR point cloud frames. Then, we adaptively predict the human motion with learnable queries for initial predictions and explicitly model the spatial-temporal correlations among them to refine the predicted motions. Finally, we decode the joint-wise results and point-wise results for auxiliary supervision.

a nuanced and comprehensive representation of human motion, facilitating a deeper understanding of complex movements.

Specifically, given a frame of point cloud observation of the past human motion $P_i = \{p_1, ..., p_N\} \in \mathbf{P}_{1:T_o}$, we segment the human body point cloud into K semantically meaningful anatomical parts via a pre-trained human part segmentation model $\Phi(\cdot)$. Details of the pre-trained human parsing model are illustrated in the supplementary materials. We retrieve the point-wise features $F_i = \{f_1, f_2, ..., f_N\}$ from the PointNet encoder before the global max-pooling. These point-wise features are then scattered into K bins corresponding to different body part segments. Within each bin, we perform max-pooling across the points to obtain part-wise feature $H_{part} \in \mathbb{R}^{T_o \times K \times d_1}$:

$$H_{part} = \{H_{part}^{k} = \text{MaxPool}(\{f_{i} | \Phi(p_{i}) == k\} | k = 1, 2, \dots, K\}.$$
(1)

We then integrate the global body feature H_{glo} yielded by the Point-Net encoder with the part-wise feature to obtain the structureaware body feature descriptor H:

$$H = \left[H_{alo} \oplus H_{part}\right] \in \mathbb{R}^{T_o \times (K+1) \times d_1},\tag{2}$$

where \oplus denotes concatenation. The feature descriptor is further enhanced with a spatial-temporal transformer layer, which models the non-linear dependencies among the body parts across different frames, further refining the descriptor's ability to capture complex bodily dynamics.

3.3 Adaptive Motion Latent Mapping

Building upon the expressive feature descriptor of the observed Li-DAR point cloud frames, we advance towards predicting the future 3D human motion from historical motion observations. Specifically, we initialize a set of learnable motion queries $H_q \in \mathbb{R}^{(T_o+T_p) \times (K+1) \times d_1}$ following a normal distribution $\mathcal{N}(0, 0.02)$, designated for each of the observed and predicted frames. These queries then selectively assimilate information from past frame descriptors within a transformer decoder layer to translate past frame features into a comprehensive feature set that encapsulates both past observations and future predictions, thereby laying the foundation for accurate human motion forecasting:

$$F = \text{MHCA}\left(Q : W_q H_q, \text{ K} : W_k H, \text{V} : W_v H\right), \tag{3}$$

where MHCA(· query, · key, · value) represents the multi-head cross-attention layer [48] and W_q , W_k , W_v are the linear projection for query, key and value. To further reinforce the spatial-temporal consistency within the updated body features, we apply spatial and temporal transformer layers, progressively refining the predicted motion features *F* into *F'*. Finally, we regress the coarse 3D joints $\hat{J}_t \in \mathbb{R}^{24 \times 3}$ through the refined motion features *F'*. The loss function can be formulated as below:

$$\mathcal{L}_{\text{initial}} = \sum_{t=1}^{T_o+T_p} \left\| \hat{J}_t - J_t \right\|^2.$$
(4)

3.4 Spatial-temporal Correlations Refinement

Leveraging the aforementioned modules, we derive the initial predicted 3D skeletal joints. However, given the structured nature of human joint motion, it is crucial to explicitly model the spatialtemporal correlations among various human joints for accurate motion prediction. To address this, we employ a spatial-temporal transformer to integrate joint features, local semantic features, and global geometric features. This facilitates dynamic refinement of these correlations, effectively modeling the spatio-temporal contextual information. Specifically, we first embed the coarse 3D pose prediction $\hat{\mathbf{J}} = {\hat{J}_1, \hat{J}_2, \dots, \hat{J}_T}$ into joint-wise features using an Multilayer Perceptron(MLP) layer:

$$E_{\text{joint}} = \text{MLP}(\hat{\mathbf{J}}) \in \mathbb{R}^{T \times 24 \times d_2},\tag{5}$$

where $T = T_o + T_p$. Similarly, we transform the refined motion features F' to the same dimension:

$$\boldsymbol{E}_F = \mathrm{MLP}(F') \in \mathbb{R}^{T \times (K+1) \times d_2}.$$
(6)

These are concatenated to form tokens $TK = [E_{joint} \oplus E_F]$ for the transformer layers. To explore implicit information within these tokens, we deploy a spatial transformer (STFormer) F_{STF} and a temporal transformer (TTFormer) F_{TTF} to capture the dependencies within spatial and temporal dimensions, respectively. The STFormer aims to model the spatial dependencies among all tokens within a frame. We slice the token embedding TK at the spatial dimension and encode the i^{th} token TK^i with a learnable spatial positional encoding to signify each token's relative spatial location before

Methods	Publication Year]	LIPD [62]				LiDAR	Human26N	M [18]	
monrous		100ms↓	200ms↓	300ms↓	400ms↓	AVG↓	100ms↓	200ms↓	300ms↓	400ms↓	AVG↓
LiDARCap [18]+SPGCN [30]	2022 / 2022	82.63	100.98	116.71	128.67	107.25	83.69	94.68	105.09	113.97	99.35
LiDARCap [18]+Eqmotion [54]	2022 / 2023	81.27	97.26	111.28	122.79	103.15	83.01	91.66	101.15	109.91	96.43
LiDARCap [18]+AuxFormer [53]	2022 / 2023	82.09	99.19	113.80	124.89	104.99	83.77	94.90	105.36	113.96	99.50
LIP [62]+SPGCN [30]	2023 / 2022	77.75	95.67	111.40	123.68	102.12	81.20	91.43	101.22	110.07	95.98
LIP [62]+Eqmotion [54]	2023 / 2023	77.34	93.78	108.19	120.18	99.87	81.14	89.76	98.80	107.49	94.30
LIP [62]+AuxFormer [53]	2023 / 2023	77.81	95.00	109.85	121.18	100.96	81.31	91.70	101.77	110.25	96.26
LiveHPS [42]+SPGCN [30]	2024 / 2022	70.40	87.83	103.62	116.21	94.51	76.29	84.87	93.89	101.73	89.20
LiveHPS [42]+Eqmotion [54]	2024 / 2023	71.60	87.75	102.67	115.40	94.22	76.97	84.17	92.50	101.14	88.69
LiveHPS [42]+AuxFormer [53]	2024 / 2023	70.89	88.31	103.69	115.55	94.61	77.13	86.65	96.62	104.40	91.20
MDM [47]	2023	77.38	89.28	100.73	110.66	94.51	73.12	78.21	85.65	92.68	82.41
Ours		60.05	70.84	82.65	93.70	76.80	67.09	69.88	76.57	84.64	74.55

Table 1: Short-term motion prediction results of MPJPE(mm) on LIPD [62] and LiDARHuman26M [18] datasets. "AVG" means the average MPJPE results of 100ms, 200ms, 300ms and 400ms.

processing by STFormer. Utilizing the self-attention mechanism, STFormer models the dependencies of all tokens per frame, yielding spatially consecutive token-wise features as below:

$$H_{s} = \left\{ F_{STF} \left(TK^{1:(K+25)} \right)_{t} \Big|_{t=1}^{T} \right\} \in \mathbb{R}^{T \times (K+25) \times d_{2}}.$$
 (7)

Conversely, TTFormer is tasked with discerning the temporal correlations to ensure temporal consistency and motion accuracy. It regards each feature across the sequence as tokens, generating features $TK_t \in \mathbb{R}^{(K+25)\times d_2}$ with a total of *T* tokens, where TK_t represents the t^{th} token of the token embedding *TK* sliced in the temporal dimension. Additionally, we append a learnable temporal positional encoding to TK^i to mark each token's temporal position in the sequence. The TTFormer then encodes the temporally modeled motion features as:

$$H_{t} = \left\{ F_{TTF} \left(TK_{1:T} \right)^{i} \Big|_{i=1}^{(K+25)} \right\} \in \mathbb{R}^{T \times (K+25) \times d_{2}}.$$
 (8)

We adopt STFormer and TTFormer layers alternatively, which enables a thorough modeling of spatial-temporal correlations. STFormer layers effectively capture the complex spatial relationships present in the data, whereas TTFormer layers adeptly model the temporal dynamics of human motion. By focusing on both spatial and temporal aspects, essentially the "where" and the "when" of motion, our approach achieves a comprehensive analysis and synthesis, leading to more accurate and coherent motion predictions.

3.5 Motion Prediction Head

In the network's final phase, we employ dual heads to decode human skeletons and point clouds concurrently, utilizing Multilayer Perceptrons (MLPs). The joint-wise regression head utilizes three MLP layers to decode the final joints $\hat{J}'_t \in \mathbb{R}^{24 \times 3}$. To supervise the training of this head, we apply an L_2 loss:

$$\mathcal{L}_{\text{final}} = \sum_{t=1}^{T_o + T_p} \left\| \hat{f}'_t - f_t \right\|^2.$$
(9)

For the point-wise regression head, three MLP layers are employed to decode each local-semantic feature into points corresponding to each human body part. With *K* predefined body parts, we achieve the final point clouds representation $\hat{P}_t \in \mathbb{R}^{K \times 32 \times 3}$. We compare the point cloud obtained from the network outputs $\hat{P}_t = \{\hat{p} \in \mathbb{R}^3\}$, $|\hat{P}_t| = N$, with \hat{P}_t with the ground truth point cloud $P_t = \{p \in \mathbb{R}^3\}$, $|P_t| = M$ by Chamfer Distance as follow:

$$\mathcal{L}_{\text{CD},t} = \frac{1}{N} \sum_{\hat{p} \in \hat{P}_t} \min_{p \in P_t} \|\hat{p} - p\|_2^2 + \frac{1}{M} \sum_{p \in P_t} \min_{\hat{p} \in \hat{P}_t} \|\hat{p} - p\|_2^2.$$
(10)

The overall loss is:

$$\mathcal{L} = \mathcal{L}_{\text{initial}} + \mathcal{L}_{\text{final}} + \mathcal{L}_{\text{CD},t}.$$
 (11)

3.6 Diverse Motion Prediction Extension

Given the highly subjective nature of human behaviour, motion prediction requires multiple potential future predictions. We extend our approach to diverse human motion prediction setting. Following the above framework, we implement M = 4 multiple learnable motion queries in our adaptive motion intention prediction module. For each probable motion feature, they share all the network weight during the training process. We can regard each learnable query as a different motion mode that can map the past motion into multiple future motion latent space with various motion patterns. The "winner-take-all" (WTA) training strategy [11, 21] is employed, which only optimizes the best prediction with minimal average prediction error to the ground truth human motion.

4 Experiments

4.1 Implementation Details

We build our network on PyTorch 2.1.0 and CUDA 12.1, trained over 100 epochs with batch size of 128, using an initial learning rate of 10^{-4} . We set the hyper parameters of our model as $\{K = 9, d_1 = 1024, d_2 = 512\}$ across all experiments. The process was run on a server equipped with two Intel(R) Xeon(R) E5-2678

Methods	Publication Year		LIPE	0 [62]		LiDARHuman26M [18]			
Wethous		600ms↓	800ms↓	1000ms↓	AVG↓	600ms↓	800ms↓	1000ms↓	AVG↓
LiDARCap [18]+SPGCN [30]	2022 / 2022	142.82	153.70	159.64	152.05	125.42	134.03	137.89	132.44
LiDARCap [18]+Eqmotion [54]	2022 / 2023	138.83	147.95	154.44	146.91	120.93	126.85	131.36	126.38
LiDARCap [18]+AuxFormer [53]	2022 / 2023	137.10	147.15	153.54	145.93	122.86	129.72	134.05	128.87
LIP [62]+SPGCN [30]	2023 / 2022	138.08	149.46	155.76	147.76	120.79	129.18	133.27	127.75
LIP [62]+Eqmotion [54]	2023 / 2023	136.03	146.18	153.04	145.08	118.84	125.25	129.81	126.63
LIP [62]+AuxFormer [53]	2023 / 2023	133.79	144.11	150.79	142.89	118.73	125.60	130.39	124.91
LiveHPS [42]+SPGCN [30]	2024 / 2022	130.66	142.65	150.07	141.13	111.79	119.97	124.71	118.82
LiveHPS [42]+Eqmotion [54]	2024 / 2023	132.21	143.41	151.30	142.31	113.37	120.30	125.74	119.80
LiveHPS [42]+AuxFormer [53]	2024 / 2023	127.03	137.92	145.74	136.90	112.40	119.39	124.22	118.67
MDM [47]	2023	139.58	162.51	173.69	158.59	124.05	149.01	158.39	143.82
Ours		112.84	125.51	135.11	124.49	100.85	110.81	117.00	109.55

Table 2: Long-term motion prediction results of MPJPE(mm) on LIPD[62] and LiDARHuman26M [18] datasets. "AVG" means the average MPJPE results of 600ms, 800ms and 1000ms.

Table 3: Ablation studies for network design on LIPD dataset, where "SBFD" denotes our structure-aware body feature descriptor module, and "STCR" represents the spatial-temporal correlations refinement module.

Network Module	short-term	long-term		
Baseline SBFD STCR point prediction	100ms 200ms 300ms 400ms AVG	600ms 800ms 1000ms AVG		
I	64.49 75.44 87.48 98.71 81.53	116.60 128.96 138.08 127.88		
\checkmark \checkmark \checkmark \checkmark	61.91 73.11 84.64 95.87 78.88	114.44 126.91 136.17 125.84		
\checkmark \checkmark \checkmark \checkmark	60.46 71.30 83.08 94.21 77.26	113.10 125.78 135.33 124.74		
$\checkmark \checkmark \checkmark \checkmark \checkmark \checkmark$	60.05 70.84 82.65 93.70 76.80	112.84 125.51 135.11 124.49		

CPUs and 4 NVIDIA RTX3090 GPUs. We resample each frame of input point clouds P_i to a fixed N = 256 points by the farthest point sample algorithm, then we subtract the center coordinates of point clouds to normalize the input data. Following skeleton-based human motion prediction methods [19, 30], our model takes 0.4s continuous point clouds as input(4 frames for LiDAR with 10fps), and we predict the future 0.4s(4 frames) and 1.0s(10 frames) human motion for short-term and long-term prediction, respectively. For compared methods, we keep the same training strategy as in the original paper. For training data, we take training set of LiDARrelated human motion dataset LIPD [62], LiDARHuman26M [18], and synthetic dataset of a subset of AMASS [31], including ACCAD, BMLMovi, CMU following LIP [62]. We leverage Mean Per Joint Position Error (MPJPE) in millimeters as our evaluation metric, which calculates the average 3D Euclidean distance between the ground truth positions of individual joints and the corresponding predicted joint positions at each prediction timestamp.

4.2 Results

We evaluate LiDAR-HMP against several state-of-the-art methods [18, 30, 42, 47, 53, 54, 62] on two public datasets (LIPD [62] and LiDARHuman26M [18]) to demonstrate its superiority in 3D human motion prediction. The results for short-term and long-term human motion prediction are shown in Tab. 1 and Tab. 2, respectively.

(1) Comparison with two-stage methods. Conventional methods for human motion prediction typically rely on historical ground truth skeletons as input. In contrast, our method utilizes historical LiDAR frames alone. We integrate results from state-of-theart LiDAR-based 3D human pose estimation methods into these skeleton-based approaches. Due to accumulative error and the loss of fine-grained features, two-stage methods often show degraded performance in real-world scenarios that depend solely on raw sensor data. In contrast, our approach demonstrates substantial improvements, achieving enhancements of average 17.42mm and 7.86mm in short-term human motion prediction, and average 11.62mm and 9.12mm in long-term prediction on the LIPD and Li-DARHuman26M datasets, respectively. This superior performance

 Table 4: Ablation of structure-aware body feature descriptor

 on LIPD dataset.

global	local	100	200	300	400	600	800	1000
 Image: A second s		63.40	74.65	86.88	98.08	116.28	128.74 127.05 125.51	137.78
	\checkmark	60.67	71.42	82.93	93.90	114.26	127.05	136.57
	\checkmark	60.05	70.84	82.65	93.70	112.84	125.51	135.11

 Table 5: Ablation of adaptive motion latent mapping module on LIPD dataset.

	100	200	300	400	600	800	1000
static padding linear mapping ours	60.95	71.47	83.11	94.27	113.21	126.33	136.39
linear mapping	60.94	71.93	83.62	94.70	113.58	126.29	136.49
ours	60.05	70.84	82.65	93.70	112.84	125.51	135.11

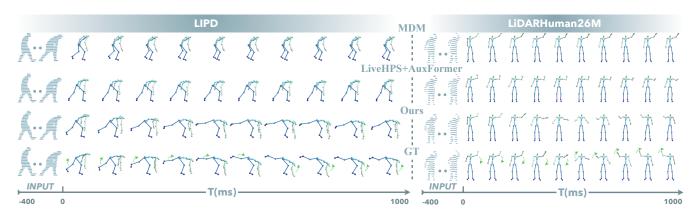


Figure 3: Qualitative comparisons of long-term predictions on LIPD and LiDARHuman26M dataset. "GT" denotes the future ground truth skeletons. The green arrow denotes the motion trace.

stems from our method's capability to fully capture the dynamic spatial-temporal motion features from raw LiDAR point clouds. Our approach not only bypasses the inaccuracies introduced by intermediate skeletons from 3D pose estimation methods, but also retains fine-grained, point-level features from the raw LiDAR data.

(2) Comparison with diffusion-based method. In addition, we also adapt the Motion Diffusion Model (MDM) [47] methodology for LiDAR-based human motion prediction by substituting its text encoder with a PointNet [39] encoder for another comparison. From Tab. 1 and Tab. 2, we can observe that diffusion-based methods obtain limited performance. This is mainly because the diffusion-based method relies on gradually denoising a signal towards generating a coherent output, may struggle with the variability and noise inherent in point cloud data. The nuances of human motion, particularly subtle movements are lost or inadequately captured during the diffusion process.

Furthermore, visual comparisons in Fig. 3 highlight our method's superiority in predicting long-term complex motions. Such as predicting the motion of bending down and getting up in LIPD and the motion of the lowering left hand and raising the right hand in LiDARHuman26M, MDM and two-stage method can only predict short-term motions or remain consistent with historical motions. By effectively modeling dynamic spatial-temporal correlations among structure-aware motion features from raw visual input, our approach offers enhanced accuracy and applicability in real-world scenarios of 3D human motion prediction.

4.3 Ablation on Network and Module Design

(1) Ablation on overall network design. We assess the efficacy of our proposed modules through comprehensive ablation studies on LIPD [62] dataset, as detailed in Tab. 3. Notably, our baseline models focus solely on global-geometric feature extraction and incorporate the adaptive motion latent mapping module. *Incorporating finegrained local-semantic features* leads to average 2.65mm, 2.04mm improvements on short-term and long-term prediction, respectively. The addition of our *spatial-temporal correlations refinement module*, which explicitly models the spatial-temporal relationships among distinct body joints and structure-aware motion features, further refines our 3D human motion predictions. Introducing an *auxiliary points regression head* also contributes to performance improvements by providing additional supervision, thereby enhancing the network's predictive capabilities.

(2) Structure-aware body feature descriptor. The analysis presented in Tab. 4 underscores the importance of fine-grained localsemantic feature modeling, especially for capturing nuanced body movements. Our approach effectively leverages both holistic globalgeometric motion features and detailed local-semantic information, delivering more robust and precise human motion predictions.

(3) Adaptive motion latent mapping. To validate the effectiveness of our adaptive motion latent mapping module, we conducted experiments by replacing the module's learnable motion query with a linear mapping in the temporal dimensions using an MLP. Additionally, we compare our method against a "static padding" approach, where future motions are extrapolated by replicating the last frame of observed motion at the input stage. As shown in Tab. 5, our approach achieves superior performance. This is attributed to our learnable motion query's ability to selectively assimilate information from past motion features and more accurately project it into the future motion latent space.

motions			LIPD	62]				L	iDARHum	an26M [18	3]	
	200ms↓	400ms↓	600ms↓	800ms↓	1000ms↓	AVG↓	200ms↓	400ms↓	600ms↓	800ms↓	1000ms↓	AVG↓
1	70.84	93.70	113.24	126.49	136.10	108.07	69.88	84.64	102.16	112.51	118.40	97.51
4	68.61	87.49	98.25	106.03	117.68	95.61	64.57	78.09	91.16	98.25	107.21	87.85

Table 6: MinMPJPE(mm) results of diverse motion prediction extension. "AVG" means the average MPJPE(mm).

Table 7: Ablation on LIPD with simulated occlusion.

occlusion ratio	100	200	300	400	600	800	1000
0%	60.05	70.84	82.65	93.70	112.84	125.51	135.11
20%	61.60	72.60	84.48	95.68	114.66	127.31	136.72
40%	62.96	74.22	86.34	97.70	116.16	128.62	137.88
80%	66.57	78.29	90.75	102.20	120.28	132.59	141.40

4.4 Generalization Capability Test

(1) Distance. To assess the generalization capability of our LiDAR-HMP across point clouds of varying sparsity and distances, we evaluate our method on the LIPD testing sets. Performance of the short-term motion prediction at 0.4s and long-term motion prediction at 1.0s in different distances is illustrated in Figure 4. Despite the decreasing density of LiDAR human point clouds with increasing distance results in sparser representations, our method still maintains stable performance up to a long-range distance of 17 meters. This stability is crucial for large-scale applications such as autonomous driving and robot obstacle avoidance, where motion prediction at long ranges is essential. At about 20 meters, the point cloud may reduce to roughly 30 points, capturing only the basic human outline, which poses challenges for capturing detailed movements. Nonetheless, our method consistently delivers the best performance, even under these extreme conditions.

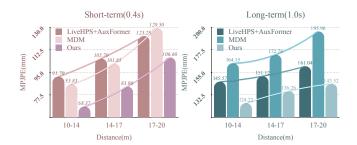


Figure 4: Evaluation for the generalization capability on various distances on LIPD.

(2) Occlusion and noise. To evaluate the robustness of our algorithm against occlusions and noise, we conduct simulations on the LIPD dataset. We introduce random noise by adding 30 noise points around the human point clouds and apply noise to 20%, 40%, and 80% of the frames, respectively. For occlusion simulation, we randomly mask points within a cubic region measuring 0.4 meters on each side on the human body, affecting 20%, 40%, and 80% of the frames respectively. The results, as presented in Tab. 7 and Tab. 8,

Table 8: Ablation on LIPD with simulated noise.

noise ratio	100	200	300	400	600	800	1000
0%	60.05	70.84	82.65	93.70	112.84	125.51	135.11
						126.63	
40%	62.29	73.29	85.24	96.42	114.43	127.27	136.96
80%	63.02	74.02	85.93	97.13	115.47	128.21	137.55

demonstrate that even under severe 80% noise or occlusion, the performance of our algorithm only slightly decreases, underscoring its robustness to noise and occlusions. *More visualization results on noise and occlusion cases are detailed in our supplementary.*

(3) *Real-world applications.* Fig. 1 shows that our method is practical for in-the-wild scenarios, capturing human motion in real-world scenarios day and night with real-time performance about 40 fps. This strongly demonstrates the feasibility and superiority of our method in real-life applications.

4.5 Diverse Motion Prediction Extension

Given the inherent spontaneity and unpredictability of human behavior, deterministic action predictions, which provide only a single outcome, are not optimal for scenarios requiring the anticipation of multiple possible outcomes for accurate decision-making. To address this, we expand our framework to diverse human motion predictions, covering up to four potential future motions. Our comparative analysis of deterministic and diverse motion predictions, detailed in Tab. 6. We follow existing diverse human motion prediction methods [10] by computing the MPJPE between the ground truth and the result most similar to the ground truth. This reveals that as the prediction time horizon increases, so does the uncertainty in human motion. This underscores the benefits of adopting diverse predictions, particularly for long-term forecasting. *Visualizations of these diverse motion prediction results can be found in our supplementary* materials.

5 Conclusion

We introduce the first single-LiDAR-based method for practical 3D human motion prediction. Building upon our effective structureaware body feature descriptor, our approach adaptively maps the observed motion manifold to the future and models the spatialtemporal correlations of the human motion for further refinement. Additionally, we extend our method to support diverse predictions, accommodating multiple potential future motions for improved decision-making in real-world applications. Extensive experiments validate our method's superior performance and generalization capabilities in real-world human motion prediction scenarios. Towards Practical Human Motion Prediction with LiDAR Point Clouds

MM '24, October 28-November 1, 2024, Melbourne, VIC, Australia

References

- Emre Aksan, Manuel Kaufmann, Peng Cao, and Otmar Hilliges. 2021. A spatiotemporal transformer for 3d human motion prediction. In 2021 International Conference on 3D Vision (3DV). IEEE, 565–574.
- [2] Yujun Cai, Lin Huang, Yiwei Wang, Tat-Jen Cham, Jianfei Cai, Junsong Yuan, Jun Liu, Xu Yang, Yiheng Zhu, Xiaohui Shen, et al. 2020. Learning progressive joint propagation for human motion prediction. In Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part VII 16. Springer, 226–242.
- [3] Ming Chen, Zhewei Wei, Zengfeng Huang, Bolin Ding, and Yaliang Li. 2020. Simple and deep graph convolutional networks. In *International conference on machine learning*. PMLR, 1725–1735.
- [4] Runnan Chen, Xinge Zhu, Nenglun Chen, Wei Li, Yuexin Ma, Ruigang Yang, and Wenping Wang. 2023. Bridging Language and Geometric Primitives for Zero-shot Point Cloud Segmentation. In Proceedings of the 31st ACM International Conference on Multimedia. 5380–5388.
- [5] Xiaodong Chen, Wu Liu, Xinchen Liu, Yongdong Zhang, Jungong Han, and Tao Mei. 2022. Maple: Masked pseudo-labeling autoencoder for semi-supervised point cloud action recognition. In *Proceedings of the 30th ACM International Conference on Multimedia*. 708–718.
- [6] Peishan Cong, Ziyi WangZhiyang Dou, Yiming Ren, Wei Yin, Kai Cheng, Yujing Sun, Xiaoxiao Long, Xinge Zhu, and Yuexin Ma. 2024. LaserHuman: Languageguided Scene-aware Human Motion Generation in Free Environment. arXiv preprint arXiv:2403.13307 (2024).
- [7] Peishan Cong, Yiteng Xu, Yiming Ren, Juze Zhang, Lan Xu, Jingya Wang, Jingyi Yu, and Yuexin Ma. 2022. Weakly Supervised 3D Multi-person Pose Estimation for Large-scale Scenes based on Monocular Camera and Single LiDAR. arXiv preprint arXiv:2211.16951 (2022).
- [8] Yudi Dai, Yi Lin, Chenglu Wen, Siqi Shen, Lan Xu, Jingyi Yu, Yuexin Ma, and Cheng Wang. 2022. HSC4D: Human-centered 4D Scene Capture in Large-scale Indoor-outdoor Space Using Wearable IMUs and LiDAR. CVPR (2022), 6782–6792.
- [9] Lingwei Dang, Yongwei Nie, Chengjiang Long, Qing Zhang, and Guiqing Li. 2021. Msr-gcn: Multi-scale residual graph convolution networks for human motion prediction. In Proceedings of the IEEE/CVF international conference on computer vision. 11467–11476.
- [10] Lingwei Dang, Yongwei Nie, Chengjiang Long, Qing Zhang, and Guiqing Li. 2022. Diverse human motion prediction via gumbel-softmax sampling from an auxiliary space. In Proceedings of the 30th ACM International Conference on Multimedia. 5162–5171.
- [11] Nemanja Djuric, Vladan Radosavljevic, Henggang Cui, Thi Nguyen, Fang-Chieh Chou, Tsung-Han Lin, Nitin Singh, and Jeff Schneider. 2020. Uncertainty-aware short-term motion prediction of traffic actors for autonomous driving. In Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision. 2095–2104.
- [12] Katerina Fragkiadaki, Sergey Levine, Panna Felsen, and Jitendra Malik. 2015. Recurrent network models for human dynamics. In *Proceedings of the IEEE international conference on computer vision*. 4346–4354.
- [13] Xuehao Gao, Shaoyi Du, Yang Wu, and Yang Yang. 2023. Decompose more and aggregate better: Two closer looks at frequency representation learning for human motion prediction. In *Proceedings of the IEEE/CVF conference on computer* vision and pattern recognition. 6451–6460.
- [14] Liang-Yan Gui, Yu-Xiong Wang, Xiaodan Liang, and José MF Moura. 2018. Adversarial geometry-aware human motion prediction. In Proceedings of the european conference on computer vision (ECCV). 786–803.
- [15] Wenbo Hu, Changgong Zhang, Fangneng Zhan, Lei Zhang, and Tien-Tsin Wong. 2021. Conditional directed graph convolution for 3d human pose estimation. In Proceedings of the 29th ACM International Conference on Multimedia. 602–611.
- [16] Siyuan Huang, Bo Zhang, Botian Shi, Hongsheng Li, Yikang Li, and Peng Gao. 2023. Sug: Single-dataset unified generalization for 3d point cloud classification. In Proceedings of the 31st ACM International Conference on Multimedia. 8644–8652.
- [17] Ashesh Jain, Amir R Zamir, Silvio Savarese, and Ashutosh Saxena. 2016. Structural-rnn: Deep learning on spatio-temporal graphs. In Proceedings of the ieee conference on computer vision and pattern recognition. 5308–5317.
- [18] Jialian Li and etc. 2022. LiDARCap: Long-range Marker-less 3D Human Motion Capture with LiDAR Point Clouds. In CVPR. 20502–20512.
- [19] Maosen Li, Siheng Chen, Zijing Zhang, Lingxi Xie, Qi Tian, and Ya Zhang. 2022. Skeleton-parted graph scattering networks for 3d human motion prediction. In *European conference on computer vision*. Springer, 18–36.
- [20] Maosen Li, Siheng Chen, Yangheng Zhao, Ya Zhang, Yanfeng Wang, and Qi Tian. 2020. Dynamic multiscale graph neural networks for 3d skeleton based human motion prediction. In *Proceedings of the IEEE/CVF conference on computer vision* and pattern recognition. 214–223.
- [21] Ming Liang, Bin Yang, Rui Hu, Yun Chen, Renjie Liao, Song Feng, and Raquel Urtasun. 2020. Learning lane graph representations for motion forecasting. In Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part II 16. Springer, 541–556.

- [22] Guanze Liu, Yu Rong, and Lu Sheng. 2021. Votehmr: Occlusion-aware voting network for robust 3d human mesh recovery from partial point clouds. In Proceedings of the 29th ACM International Conference on Multimedia. 955–964.
- [23] Hanbing Liu, Jun-Yan He, Zhi-Qi Cheng, Wangmeng Xiang, Qize Yang, Wenhao Chai, Gaoang Wang, Xu Bao, Bin Luo, Yifeng Geng, et al. 2023. Posynda: Multi-hypothesis pose synthesis domain adaptation for robust 3d human pose estimation. In Proceedings of the 31st ACM International Conference on Multimedia. 5542–5551.
- [24] Jiaming Liu, Yue Wu, Maoguo Gong, Qiguang Miao, Wenping Ma, and Cai Xu. 2023. Exploring Dual Representations in Large-Scale Point Clouds: A Simple Weakly Supervised Semantic Segmentation Framework. In Proceedings of the 31st ACM International Conference on Multimedia. 2371–2380.
- [25] Yicheng Liu, Jinghuai Zhang, Liangji Fang, Qinhong Jiang, and Bolei Zhou. 2021. Multimodal motion prediction with stacked transformers. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 7577–7586.
- [26] Zhenguang Liu, Shuang Wu, Shuyuan Jin, Shouling Ji, Qi Liu, Shijian Lu, and Li Cheng. 2022. Investigating pose representations and motion contexts modeling for 3D motion prediction. *IEEE transactions on pattern analysis and machine intelligence* 45, 1 (2022), 681–697.
- [27] Zhiwei Liu, Xiangyu Zhu, Lu Yang, Xiang Yan, Ming Tang, Zhen Lei, Guibo Zhu, Xuetao Feng, Yan Wang, and Jinqiao Wang. 2021. Multi-initialization optimization network for accurate 3d human pose and shape estimation. In Proceedings of the 29th ACM International Conference on Multimedia. 1976–1984.
- [28] Yuhang Lu, Qi Jiang, Runnan Chen, Yuenan Hou, Xinge Zhu, and Yuexin Ma. 2023. See more and know more: Zero-shot point cloud segmentation via multi-modal visual data. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 21674–21684.
- [29] Kedi Lyu, Zhenguang Liu, Shuang Wu, Haipeng Chen, Xuhong Zhang, and Yuyu Yin. 2021. Learning human motion prediction via stochastic differential equations. In Proceedings of the 29th ACM International Conference on Multimedia. 4976–4984.
- [30] Tiezheng Ma, Yongwei Nie, Chengjiang Long, Qing Zhang, and Guiqing Li. 2022. Progressively generating better initial guesses towards next stages for highquality human motion prediction. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 6437–6446.
- [31] Naureen Mahmood, Nima Ghorbani, Nikolaus F Troje, Gerard Pons-Moll, and Michael J Black. 2019. AMASS: Archive of motion capture as surface shapes. In Proceedings of the IEEE/CVF international conference on computer vision. 5442– 5451.
- [32] Wei Mao, Miaomiao Liu, and Mathieu Salzmann. 2020. History repeats itself: Human motion prediction via motion attention. In Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XIV 16. Springer, 474–489.
- [33] Julieta Martinez, Michael J Black, and Javier Romero. 2017. On human motion prediction using recurrent neural networks. In *Proceedings of the IEEE conference* on computer vision and pattern recognition. 2891–2900.
- [34] Nigamaa Nayakanti, Rami Al-Rfou, Aurick Zhou, Kratarth Goel, Khaled S Refaat, and Benjamin Sapp. 2023. Wayformer: Motion forecasting via simple & efficient attention networks. In 2023 IEEE International Conference on Robotics and Automation (ICRA). IEEE, 2980–2987.
- [35] Zhenhua Ning, Zhuotao Tian, Guangming Lu, and Wenjie Pei. 2023. Boosting Few-shot 3D Point Cloud Segmentation via Query-Guided Enhancement. In Proceedings of the 31st ACM International Conference on Multimedia. 1895–1904.
- [36] Zehai Niu, Ke Lu, Jian Xue, Haifeng Ma, and Runchen Wei. 2021. Multi-view 3D Smooth Human Pose Estimation based on Heatmap Filtering and Spatiotemporal Information. In Proceedings of the 29th ACM International Conference on Multimedia. 442–450.
- [37] Xidong Peng, Runnan Chen, Feng Qiao, Lingdong Kong, Youquan Liu, Tai Wang, Xinge Zhu, and Yuexin Ma. 2023. Sam-guided unsupervised domain adaptation for 3d segmentation. arXiv preprint arXiv:2310.08820 (2023).
- [38] Xidong Peng, Xinge Zhu, and Yuexin Ma. 2023. Cl3d: Unsupervised domain adaptation for cross-lidar 3d detection. In Proceedings of the AAAI Conference on Artificial Intelligence, Vol. 37. 2047–2055.
- [39] Charles R Qi, Hao Su, Kaichun Mo, and Leonidas J Guibas. 2017. Pointnet: Deep learning on point sets for 3d classification and segmentation. In Proceedings of the IEEE conference on computer vision and pattern recognition. 652–660.
- [40] Guocheng Qian, Yuchen Li, Houwen Peng, Jinjie Mai, Hasan Hammoud, Mohamed Elhoseiny, and Bernard Ghanem. 2022. Pointnext: Revisiting pointnet++ with improved training and scaling strategies. Advances in Neural Information Processing Systems 35 (2022), 23192–23204.
- [41] Yiming Ren, Xiao Han, Yichen Yao, Xiaoxiao Long, Yujing Sun, and Yuexin Ma. 2024. LiveHPS++: Robust and Coherent Motion Capture in Dynamic Free Environment. arXiv preprint arXiv:2407.09833 (2024).
- [42] Yiming Ren, Xiao Han, Chengfeng Zhao, Jingya Wang, Lan Xu, Jingyi Yu, and Yuexin Ma. 2024. LiveHPS: LiDAR-based Scene-level Human Pose and Shape Estimation in Free Environment. arXiv preprint arXiv:2402.17171 (2024).
- [43] Chuanfu Shen, Chao Fan, Wei Wu, Rui Wang, George Q Huang, and Shiqi Yu. 2023. Lidargait: Benchmarking 3d gait recognition with point clouds. In Proceedings of

the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 1054–1063.
[44] Pengxiang Su, Zhenguang Liu, Shuang Wu, Lei Zhu, Yifang Yin, and Xuanjing Shen. 2021. Motion prediction via joint dependency modeling in phase space. In

- Proceedings of the 29th ACM International Conference on Multimedia. 713–721.
 [45] Jiangxin Sun, Zihang Lin, Xintong Han, Jian-Fang Hu, Jia Xu, and Wei-Shi Zheng.
 2021. Action-guided 3d human motion prediction. Advances in Neural Information Processing Systems 34 (2021), 30169–30180.
- [46] Jianwei Tang, Jieming Wang, and Jian-Fang Hu. 2023. Predicting human poses via recurrent attention network. Visual Intelligence 1, 1 (2023), 18.
- [47] Guy Tevet, Sigal Raab, Brian Gordon, Yoni Shafir, Daniel Cohen-or, and Amit Haim Bermano. 2023. Human Motion Diffusion Model. In *The Eleventh International Conference on Learning Representations*. https://openreview.net/ forum?id=SJ1kSyO2jwu
- [48] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. Advances in neural information processing systems 30 (2017).
- [49] Jiexin Wang, Yujie Zhou, Wenwen Qiang, Ying Ba, Bing Su, and Ji-Rong Wen. 2023. Spatio-Temporal Branching for Motion Prediction using Motion Increments. In Proceedings of the 31st ACM International Conference on Multimedia. 4290–4299.
- [50] Yuanbin Wang, Shaofei Huang, Yulu Gao, Zhen Wang, Rui Wang, Kehua Sheng, Bo Zhang, and Si Liu. 2023. Transferring CLIP's Knowledge into Zero-Shot Point Cloud Semantic Segmentation. In Proceedings of the 31st ACM International Conference on Multimedia. 3745–3754.
- [51] Zhihao Wang, Yulin Zhou, Ningyu Zhang, Xiaosong Yang, Jun Xiao, and Zhao Wang. 2024. Existence Is Chaos: Enhancing 3D Human Motion Prediction with Uncertainty Consideration. In Proceedings of the AAAI Conference on Artificial Intelligence, Vol. 38. 5841–5849.
- [52] Peng Wu, Xiankai Lu, Jianbing Shen, and Yilong Yin. 2023. Clip Fusion with Bi-level Optimization for Human Mesh Reconstruction from Monocular Videos. In Proceedings of the 31st ACM International Conference on Multimedia. 105–115.
- [53] Chenxin Xu, Robby T Tan, Yuhong Tan, Siheng Chen, Xinchao Wang, and Yanfeng Wang. 2023. Auxiliary tasks benefit 3d skeleton-based human motion prediction. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 9509– 9520.
- [54] Chenxin Xu, Robby T Tan, Yuhong Tan, Siheng Chen, Yu Guang Wang, Xinchao Wang, and Yanfeng Wang. 2023. Eqmotion: Equivariant multi-agent motion prediction with invariant interaction reasoning. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 1410–1420.
- [55] Yiteng Xu, Peishan Cong, Yichen Yao, Runnan Chen, Yuenan Hou, Xinge Zhu, Xuming He, Jingyi Yu, and Yuexin Ma. 2023. Human-centric scene understanding for 3d large-scale scenarios. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 20349–20359.
- [56] Yiteng Xu, Kecheng Ye, Xiao Han, Yiming Ren, Xinge Zhu, and Yuexin Ma. 2024. A Unified Framework for Human-centric Point Cloud Video Understanding. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 1155–1164.
- [57] Yichen Yao, Zimo Jiang, Yujing Sun, Zhencai Zhu, Xinge Zhu, Runnan Chen, and Yuexin Ma. 2024. HUNTER: Unsupervised Human-centric 3D Detection via Transferring Knowledge from Synthetic Instances to Real Scenes. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 28120– 28129.
- [58] Maosheng Ye, Jiamiao Xu, Xunnong Xu, Tengfei Wang, Tongyi Cao, and Qifeng Chen. 2023. Bootstrap motion forecasting with self-consistent constraints. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 8504– 8514.
- [59] Jinlu Zhang, Yujin Chen, and Zhigang Tu. 2022. Uncertainty-aware 3d human pose estimation from monocular video. In Proceedings of the 30th ACM International Conference on Multimedia. 5102–5113.
- [60] Jason Y Zhang, Panna Felsen, Angjoo Kanazawa, and Jitendra Malik. 2019. Predicting 3d human dynamics from video. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 7114–7123.
- [61] Wanying Zhang, Shen Zhao, Fanyang Meng, Songtao Wu, and Mengyuan Liu. 2023. Dynamic Compositional Graph Convolutional Network for Efficient Composite Human Motion Prediction. In Proceedings of the 31st ACM International Conference on Multimedia. 2856–2864.
- [62] Chengfeng Zhao, Yiming Ren, Yannan He, Peishan Cong, Han Liang, Jingyi Yu, Lan Xu, and Yuexin Ma. 2022. LiDAR-aid Inertial Poser: Large-scale Human Motion Capture by Sparse Inertial and LiDAR Sensors. arXiv preprint arXiv:2205.15410 (2022).
- [63] Ziyu Zhao, Zhenyao Wu, Xinyi Wu, Canyu Zhang, and Song Wang. 2022. Crossmodal few-shot 3d point cloud semantic segmentation. In Proceedings of the 30th ACM international conference on multimedia. 4760–4768.
- [64] Kangkang Zhou, Lijun Zhang, Feng Lu, Xiang-Dong Zhou, and Yu Shi. 2023. Efficient Hierarchical Multi-view Fusion Transformer for 3D Human Pose Estimation. In Proceedings of the 31st ACM International Conference on Multimedia. 7512–7520.

A Overview

In the supplementary materials, we first present visualizations of our method's performance under challenging conditions, including occlusion and noise, to demonstrate its generalization capabilities and robustness. Next, we showcase the results of our diverse human motion prediction method, highlighting the unpredictability and diversity of the future human motions, and illustrating the significance of diverse predictions for more accurate decision-making. In addition, we also present the *real-time deployment and realtime results of our approach in the video of our supplementary materials*. Finally, we present the specifics of the pretrained LiDAR-based human parsing synthetic dataset, outlining the training methodologies and outcomes.

B More Visualization Results

B.1 Occlusion and Noise Cases

In this section, we show the results of our method under occlusion and noise, as in Figure. 5 and Figure. 6. Our methods can still accurately forecast the future human motions even in such challenging cases, further highlighting the robustness and generalization ability of our approach.

B.2 Diverse Human Motion Prediction

Given the inherent spontaneity and unpredictability of human behavior, we extend our framework to diverse human motion predictions, covering up to four potential future motions. Here, we shown four different motion prediction results according to the same point cloud observations in Figure 7.

B.3 Real-world Applications

We show more real-world demos in the video of our supplementary materials to demonstrate the significance of our approach for realworld applications.

C LiDAR-based Human Parsing

C.1 Synthetic Data

We train our LiDAR-based human parsing model on a synthetic dataset created using ray casting on human mesh models from the AMASS [31] dataset. Detailed steps of synthetic data generation are outlined below. We generated 700,000 frames for training and 300,000 frames for validation. To simulate LiDAR point clouds, human meshes are placed at distances ranging from 6 to 27 meters from a ray caster, using 2048 vertical scans (covering 360 degrees) and 128 LiDAR beams. Each beam's emission direction is defined by a unit vector in the spherical coordinate system, $d = [\cos \varphi \sin \theta, \cos \varphi \cos \theta, \sin \varphi]$, where φ is the angle from the emission direction to the XY plane and θ represents the azimuth. The LiDAR center is c = [0, 0, 2]. The intersection point $p = [p_x, p_y, p_z]$ is computed using:

$$p = c + d \frac{n^T (q - c)}{n^T d},$$
(12)

where n is the normal vector of the corresponding mesh and q denotes any vertex point of the mesh. To bridge the gap between synthetic data and real LiDAR scans, random occlusions and noise

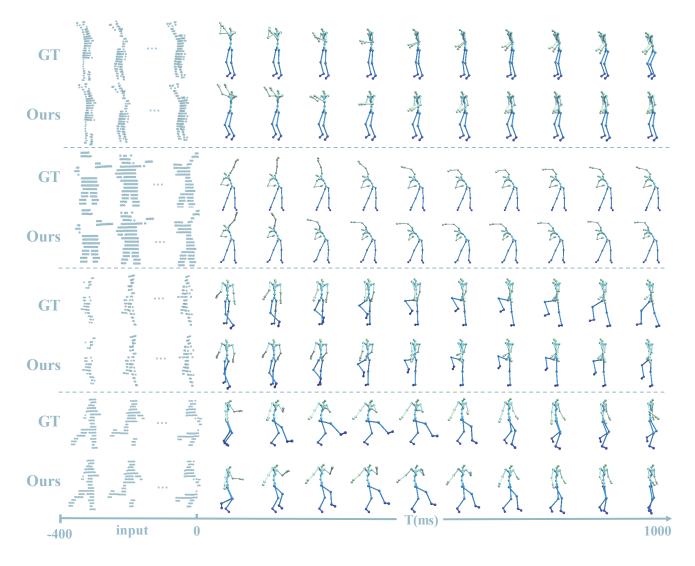


Figure 5: Visualisation of the results in the occlusion case demonstrates the robustness of our LiDAR-based human motion prediction approach even in scenarios with occlusions. "GT" denotes the future ground truth skeletons.

are incorporated. The SMPL mesh vertices, which are known for their ordered and regular structure, normally provide 24 human body part labels. Due to the sparsity of LiDAR point clouds, we have simplified these to 9 primary categories: head, left arm, right arm, upper body, lower body, upper left leg, upper right leg, lower left leg, and lower right leg. Each LiDAR point is automatically labeled with the nearest vertex's body part label, and randomly added noises are labeled as "noise".

C.2 Training Details and Results

The objective of the LiDAR-based human parsing task is to assign a label to each point, indicating its correspondence to a specific body part or noise, functioning as a form of segmentation. To achieve this, we implement the state-of-the-art object part segmentation method, PointNext [40], training it on 700,000 simulated frames

of human LiDAR point clouds. We adhere to the training strategy recommended by PointNext, which includes data augmentation and training procedures. The experimental results of this method on a validation dataset of 300,000 simulated LiDAR frames is detailed in Table 9. Additionally, we also provide visualizations of our pretrained LiDAR-based human parsing on real LiDAR scans, illustrated in Figure 8. MM '24, October 28-November 1, 2024, Melbourne, VIC, Australia

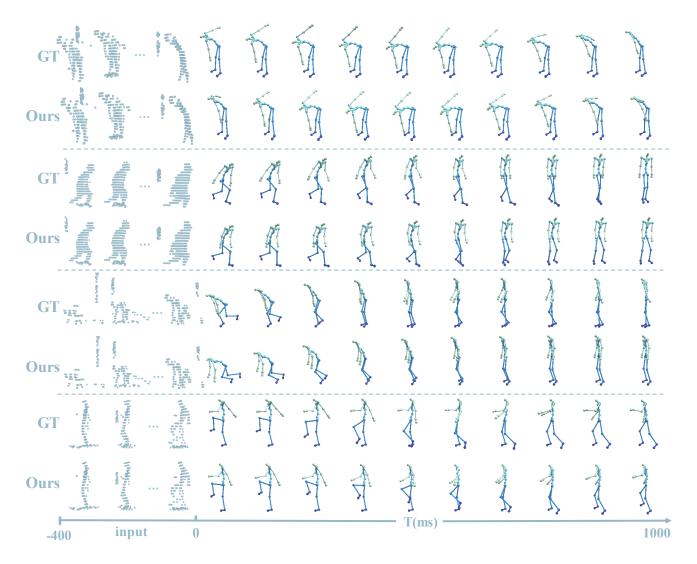


Figure 6: Visualisation of the results in the noise case demonstrates the robustness of our LiDAR-based human motion prediction approach even in noisy environments. "GT" indicates the future ground truth skeletons.

Table 9: LiDAR-based human parsing results on the validation set of our synthetic data.

head	left arm	right arm	upper body	lower body	upper left leg	lower left leg	upper right leg	lower right leg	noise	miou
94.10	90.77	90.25	82.66	91.25	90.67	95.27	90.66	95.48	97.83	91.89

Towards Practical Human Motion Prediction with LiDAR Point Clouds

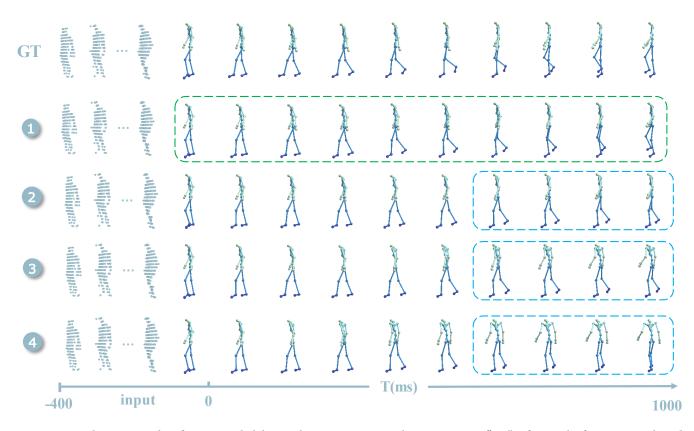


Figure 7: Visualization results of our extended diverse human motion prediction on LIPD. "GT" refers to the future ground truth skeletons. Using the same historical input, we display four different future motions predicted by our network simultaneously. The predictions in the green dashed box are closest to the ground truth, while the other three in the blue dashed box, though varying from the ground truth, depict plausible alternatives where a person might move forward or turn at different speeds.

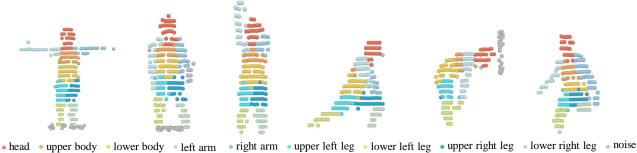


Figure 8: Visualisation of our pretrained LiDAR-based human parsing network applied to real LiDAR scans.