Project SHADOW: Symbolic Higher-order Associative Deductive reasoning On Wikidata using LM probing

Hanna Abi Akl^{1,2}

¹Data ScienceTech Institute, 4 Rue de la Collégiale, 75005, Paris, France ²Université Côte d'Azur, Inria, CNRS, I3S

Abstract

We introduce SHADOW, a fine-tuned language model trained on an intermediate task using associative deductive reasoning, and measure its performance on a knowledge base construction task using Wikidata triple completion. We evaluate SHADOW on the LM-KBC 2024 challenge and show that it outperforms the baseline solution by 20% with a F1 score of 68.72%.

1. Introduction

Large language models (LLMs) have performed increasingly well in a wide range of semantic tasks including those involving leveraging knowledge from the models themselves[1]. This lead to research avenues investigating the capabilities of these models in knowledge-related tasks involving knowledge graphs and ontologies on the one hand, and measuring the intrinsic knowledge contained in LLMs on the other hand[1]. The Language Model Knowledge Base Construction (LM-KBC¹) challenge proposes to evaluate intrinsic language model (LM) knowledge using techniques like LM probing and prompting[2] to construct knowledge bases by completing triples of subject entities and relations with the relevant object entities. In this work, we present SHADOW, a fine-tuned model on knowledge base triples, and evaluate it on the LM-KBC task. We follow a methodology inspired from associative deductive reasoning[3] and leverage that technique to incorporate it in re-defining the probing problem to train the model more effectively. The rest of the work is organized as follows. In section 2, we discuss some of the related work. Section 3 describes our experimental framework. In section 4, we report our results and discuss our findings. Finally, we conclude in section 5.

2. Related work

LM probing has been studied and evaluated in different research avenues. In their work, Vulić et al. study the information stored in LLMs with respect to their architecture, focusing on the factors behind their understanding of lexical semantics[4]. Other techniques leverage prompting

KBC-LM'24: Knowledge Base Construction from Pre-trained Language Models workshop at ISWC 2024

hanna.abi-akl@dsti.institute (H. A. Akl)

https://hannaabiakl.github.io/ (H. A. Akl)

^{© 0 2024} Copyright for this paper by its authors. Use permitted under Creative Commons License Attribution 4.0 International (CC BY 4.0).

CEUR Workshop Proceedings (CEUR-WS.org)

¹https://lm-kbc.github.io/challenge2024/

to encourage LLMs to use their knowledge more effectively to find better answers. Alivanistos et al. show that curating prompts manually and combining them with sets of entities make relatively small LLMs perform well on knowledge base construction tasks[5]. Similar work shows that LLMs can be prompted to generate seemingly coherent responses to incoherent inputs[6]. Other lines of work treat LLMs as knowledge bases and employ query-based techniques to probe them for specific knowledge. Petroni et al. compare different transformer-based models by querying them with specific input knowledge and tracing whether this knowledge is retained in the LLMs[2]. AlKhamissi et al. evaluate LLMs as knowledge bases using different techniques ranging from model editing to discrete prompting on defined metrics like interpretability and causal tracing[7]. Research has also shown work on LLMs as knowledge bases using external knowledge in the form of extended vocabulary[8], knowledge sources like knowledge graph information[9] or by designing architectures that support external vectorized knowledge sources like Retrieval-Augmented-Generation (RAG) systems[10].

3. Experiments

This section describes our experiments in terms of data, model and training process.

3.1. Dataset

The data provided by the organizers are triples of the form (subject, relation, object). The following relations are considered:

- countryLandBordersCountry: Null values possible (e.g., Iceland)
- personHasCityOfDeath: Null values possible
- seriesHasNumberOfEpisodes: Object is numeric
- awardWonBy: Many objects per subject (e.g., 224 Physics Nobel prize winners)
- companyTradesAtStockExchange: Null values possible

The data is provided in 3 sets: train, validation and test. The test set is used as the official submission evaluation set. The number of triples in each set is:

- 377 in the train set
- 378 in the validation set
- 378 in the test set

For the subject and object in every triple, both the ID and the label are provided. A sample triple is thus represented as such: {"SubjectEntity": "Belize", "SubjectEntityID": "Q242", "ObjectEntities": ["Guatemala", "Mexico"], "ObjectEntitiesID": ["Q774", "Q96"], "Relation": "countryLandBorder-sCountry"].

3.2. Model

We train SHADOW as a conditional generation model from a base flan-t5-small² model and fine-tune it on the provided data. The training hyperparameters are configured as such: {learn-ing_rate: 1e-04, train_batch_size: 4, eval_batch_size: 4, num_epochs: 20, question_length:

²https://huggingface.co/google/flan-t5-small

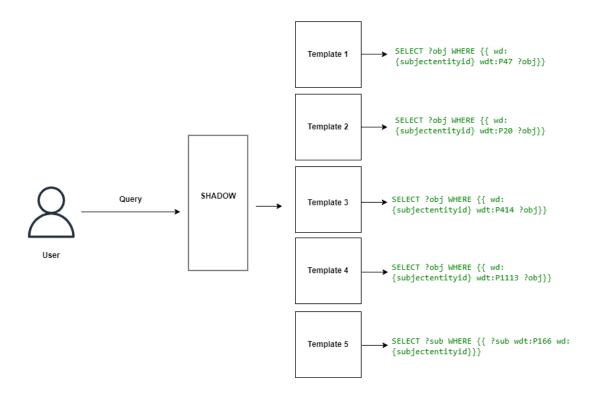


Figure 1: Experimental setup.

512, target_length: 512, lr_scheduler_type: linear, optimizer: Adam with betas=(0.9,0.999) and epsilon=1e-08}.

3.3. Setup

We design our experiment to combine LLM probing with a symbolic component and indirectly evaluate the intrinsic knowledge found in LLMs on Wikidata knowledge graphs. We shift the focus away from generating correct SPARQL queries to retrieving the relevant objects for each subject and relation pair by designing templates containing the dynamic queries needed to answer the generic question: *What Z completes the relationship Y for X*?, where *X*, *Y* and *Z* refer respectively to the subject, relation and object(s) in a triple. Since the challenge deals with 5 types of relations, we design a total of 5 templates and generate a numerical template ID to identify them. We then pair each subject and relation from a triple with the corresponding template ID (i.e. the template ID pointing to the correct SPARQL query that retrieves the corresponding object(s)). SHADOW is then trained to generate the correct template ID depending on the given subject and relation type on one hand, and learning to generate an acceptable template ID on the other. Figure 1 shows our experimental design process. The training is done by splitting the train set into an 80-20 split randomly and training on the 80%. The remaining 20% are incorporated into the validation set. Table 1 shows the training results.

Training Loss	Epoch	Step	Validation Loss
0.6679	1.0	1000	0.0005
0.3425	2.0	2000	0.0002
0.2303	3.0	3000	0.0001
0.1735	4.0	4000	0.000
0.1394	5.0	5000	0.0001
0.1167	6.0	6000	0.00009
0.1006	7.0	7000	0.00008
0.0882	8.0	8000	0.00007
0.0785	9.0	9000	0.00006
0.0707	10.0	10000	0.00006
0.0643	11.0	11000	0.00005
0.0590	12.0	12000	0.00005
0.0545	13.0	13000	0.00004
0.0506	14.0	14000	0.00004
0.0473	15.0	15000	0.00004
0.0443	16.0	16000	0.00003
0.0417	17.0	17000	0.00003
0.0394	18.0	18000	0.00003
0.0374	19.0	19000	0.00003
0.0355	20.0	20000	0.00003

Table 1SHADOW model training results

The experiment is conducted on a Google Colab instance using a L4 High-RAM GPU. The code for our experimental setup is publicly available on GitHub³. The SHADOW model has been publicly released on Hugging Face⁴.

4. Results

Tables 2 and 3 capture the results on the official challenge test set. Overall, SHADOW performs well on the template identification task for the different relations. A closer inspection of the results shows that the model performs worse on the *countryLandBordersCountry* relation which can be interpreted by the fact that the corresponding query targets property *P47*, or *shares border with*, which encompasses but is not limited to results sharing land borders (i.e. it also targets objects sharing sea borders). The nature of the property explains the high recall score, which retains a larger set of objects for that relation, and the low precision which reflects the few actual correct objects expected. The reason for choosing P47 is that it was the closest property that meets the required relation. The result is propagated in the zero-object cases, wherein the recall score is fairly high compared to a low precision score. This results is directly impacted by the choice of coding the query generation in the hands of the model and risking volatility

³https://github.com/HannaAbiAkl/SHADOW

⁴https://huggingface.co/HannaAbiAkl/shadow

Relation	Macro Average Precision	Macro Average Recall	Macro Average F1-score
awardWonBy	0.9816	1.0000	0.9900
companyTradesAtStockExchange	0.9950	1.0000	0.9971
countryLandBordersCountry	0.7470	0.9717	0.7829
personHasCityOfDeath	0.9700	1.0000	0.9700
seriesHasNumberOfEpisodes	1.0000	0.0000	0.0000
Average	0.9453	0.7297	0.6872

Table 2Per-relation scores

Table 3

Zero-object cases

Precision	Recall	F1-score
0.4975	0.90006	0.6408

in the results. The relation *seriesHasNumberOfEpisodes* shows a contrasting result. The tradeoff between perfect precision and zero recall suggests a cautious classification, whereby the net of positive results, i.e. relations correctly associated with the proper template ID, is small but accurate. The precision score is explained by the fact that the query behind the template targets the correct property and returns the correct object (which is either a number or null if there are no series episodes). The low recall means SHADOW did not learn to associate this particular relation with its correct template, drawing questions over the intrinsic knowledge for that type of relation in the model. It is also possible that the stark difference between the nature of this relation, which is the only one among the 5 to expect a purely numerical answer as opposed to Wikidata entities, has proven more challenging for SHADOW to learn despite the fine-tuning process it has undergone. Finally, it is worth highlighting the model's performance on the *awardWonBy* relation, considering it is underrepresented at one-tenth of the other relations, i.e. 10 relations in the train, validation and test sets compared to approximately 100 for each of the four other relations.

Table 4 shows the official performance of SHADOW compared to other solutions. Despite its difficulties with some relations, SHADOW performs very well with respect to the baseline and outperforms it by almost 20%. It falls however short of the best scores and is outclassed by some margin.

5. Conclusion

In this work, we show how a fine-tuned LLM model can leverage intrinsic knowledge through LM probing and combine it with associative deductive reasoning to build disambiguated knowledge bases. The performance of SHADOW, our model, outperforms the baseline by disambiguating relation types and indirectly associating them with relevant knowledge graph completion queries. Our experiments show however that LLMs possess uneven knowledge with respect to Wikidata relations and leave much room for improvement in that area. Future work will focus

Table 4
Official submission leaderboard

Team Name	Average F1-score	
davidebara	0.9224	
KB	0.9131	
RAGN4ROKS	0.9083	
WWWD	0.6977	
DSTI	0.6872	
NadeenFathallah	0.6529	
Rajaa	0.5662	
aunsiels	0.5076	
lm-kbc-organizer	0.4865	

on studying relation types in depth to improve LLM knowledge.

References

- [1] X. Wang, Z. Chen, H. Wang, Z. Li, W. Guo, et al., Large language model enhanced knowledge representation learning: A survey, arXiv preprint arXiv:2407.00936 (2024).
- [2] F. Petroni, T. Rocktäschel, S. Riedel, P. Lewis, A. Bakhtin, Y. Wu, A. Miller, Language models as knowledge bases?, in: Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), 2019, pp. 2463–2473.
- [3] W. Takano, Y. Nakamura, Associative processes between behavioral symbols and a large scale language model, in: 2010 IEEE International Conference on Robotics and Automation, IEEE, 2010, pp. 2404–2409.
- [4] I. Vulić, E. M. Ponti, R. Litschko, G. Glavaš, A. Korhonen, Probing pretrained language models for lexical semantics, in: Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP), 2020, pp. 7222–7240.
- [5] D. Alivanistos, S. B. Santamaría, M. Cochez, J.-C. Kalo, E. van Krieken, T. Thanapalasingam, Prompting as probing: Using language models for knowledge base construction, arXiv preprint arXiv:2208.11057 (2022).
- [6] V. Cherepanova, J. Zou, Talking nonsense: Probing large language models' understanding of adversarial gibberish inputs, arXiv preprint arXiv:2404.17120 (2024).
- [7] B. AlKhamissi, M. Li, A. Celikyilmaz, M. Diab, M. Ghazvininejad, A review on language models as knowledge bases, arXiv preprint arXiv:2204.06031 (2022).
- [8] D. Loureiro, A. M. Jorge, Probing commonsense knowledge in pre-trained language models with sense-level precision and expanded vocabulary, arXiv preprint arXiv:2210.06376 (2022).
- [9] Q. He, Y. Wang, W. Wang, Can language models act as knowledge bases at scale?, arXiv preprint arXiv:2402.14273 (2024).
- [10] B. Z. Li, E. Liu, A. Ross, A. Zeitoun, G. Neubig, J. Andreas, Language modeling with editable external knowledge, arXiv preprint arXiv:2406.11830 (2024).