

EventChat: Implementation and user-centric evaluation of a large language model-driven conversational recommender system for exploring leisure events in an SME context.

Hannes Kunstmann^{1†}, Joseph Ollier^{2†*}, Joel Persson¹, Florian von Wangenheim^{1,2}

¹ Chair of Technology Marketing, Department of Management, Technology, and Economics, ETH Zurich, Zurich, Switzerland | Weinbergstrasse 56, 8006 Zürich

² Mobiliar Lab for Analytics, Department of Management, Technology, and Economics, ETH Zurich, Zurich, Switzerland | Weinbergstrasse 56, 8006 Zürich

***Correspondence:**

Corresponding Author

jollier@ethz.ch

† These authors have contributed equally to the paper and share first authorship.

Abstract

Large language models (LLMs) present an enormous evolution in the strategic potential of conversational recommender systems (CRS). Yet to date, research has predominantly focused upon technical frameworks to implement LLM-driven CRS, rather than end-user evaluations or strategic implications for firms, particularly from the perspective of a small to medium enterprises (SME) that makeup the bedrock of the global economy. In the current paper, we detail the design of an LLM-driven CRS in an SME setting, and its subsequent performance in the field using both objective system metrics and subjective user evaluations. While doing so, we additionally outline a short-form revised ResQue model for evaluating LLM-driven CRS, enabling replicability in a rapidly evolving field. Our results reveal good system performance from a user experience perspective (85.5% recommendation accuracy) but underscore latency, cost, and quality issues challenging business viability. Notably, with a median cost of \$0.04 per interaction and a latency of 5.7s, cost-effectiveness and response time emerge as crucial areas for achieving a more user-friendly and economically viable LLM-driven CRS for SME settings. One major driver of these costs is the use of an advanced LLM as a ranker within the retrieval-augmented generation (RAG) technique. Our results additionally indicate that relying solely on approaches such as Prompt-based learning with ChatGPT as the underlying LLM makes it challenging to achieve satisfying quality in a production environment. Strategic considerations for SMEs deploying an LLM-driven CRS are outlined, particularly considering trade-offs in the current technical landscape.

Keywords: Large language model (LLM), Conversational recommender system (CRS), ChatGPT, Small and medium-sized enterprises (SME), ResQue

1 Introduction

The ability of recommender systems (RS) to simplify user decision-making and reduce information overload has been well-acknowledged in both information systems [19, 79, 82] and practitioner circles alike [8, 66]. Recommendations can account for as much as 30% of firm revenue, with a 1% improvement in recommendation quality translating into billions of dollars [75]. A key limitation of traditional RS, however, is a lack of user control over recommendations [3, 12, 42, 48, 49], with users constrained to reactively make choices among recommendations pre-integrated into the system’s logic [1] rather than proactively describing their desired choice set [41]. Conversational recommender systems (CRS) overcome this limitation by allowing for user input and feedback (e.g., “This product is too expensive”) via a conversational interface (i.e., a chatbot) supplemented by machine learning (ML) techniques [14] to refine recommendations and empower users in their search [39, 41].

The emergence and integration of large language models (LLMs) capable of understanding and generating natural language (and other content) to perform a wide range of tasks [35] therefore represents a monumental shift in the strategic potential of CRS [61]. Beyond LLMs capabilities in natural language processing and user engagement [5], their versatility makes them well-suited for architectural tasks such as RS serving [21] or reranking within the retrieval-augmented generation (RAG) technique [25]. Additionally, LLMs can be seamlessly integrated into CRS architecture without requiring extensive data or other costly resources for model training, with even the most advanced LLMs (e.g., ChatGPT) accessible by simply calling application programming interfaces (APIs). LLM-driven CRS therefore represent a high-potential tool to create efficacious CRS systems, as recognized by industry leaders [34, 74]. However, for small-to-medium size enterprises (SMEs) that often face resource constraints or fine-margins, the path to implementing LLM-driven CRS remains unclear.

To date, several frameworks for building LLM-driven CRS have been proposed that address practical challenges such as effective conversation management or the extraction of information from external sources [22, 25, 28, 33]. Nonetheless, there remains a lack of research on the technical considerations faced when implementing LLM-driven CRS for a specific business context, and an evaluation of how strategically useful these implementations may be for SMEs. Business-critical factors ambiguous in existing frameworks [22, 25, 28, 33] include development costs, operational expenses, as well as performance and latency implications of adopting an agent-like vs. stage-like architecture and contextualizing LLMs to users inputs. Similarly, uncertainty regarding system performance in production environments from an end user perspective raises questions about the practicality and effectiveness of these systems [92]. Lastly, for resource-constrained SMEs, the value of adding additional features (i.e., augmenting the UI with buttons, anthropomorphic features etc.) as recommended in extant research [31, 43, 73, 91] remains unclear.

In this paper, as our core contribution, we outline the design of a ChatGPT-driven CRS, describing practical design choices, their strengths and limitations, and strategic considerations for SMEs. To verify

the strategic potential of the system design, we subsequently empirically evaluate its performance in the field using both objective (i.e., system-based user interaction metrics) and subjective (i.e., user-evaluations) measures. To do so, we test a revised, short-form ResQue model [83] tailored for LLM-driven CRS evaluation, extending RS theory and enabling replicability in a quickly evolving domain. Overall, our research aims to democratize the roll out of LLM-driven CRS to SMEs, which makeup the bedrock of the global economy [89], whilst accounting for practical considerations they face while doing so [65].

2 Related Work

2.1 Strategic Potential of LLM-driven CRS for SMEs

The strategic importance of RS, CRS, chatbots, and the recommendations they provide has been well-established [57, 63]. RS technologies can enhance consumer product search (i.e., greater exploration of product options), upsell (i.e., encourage purchases of higher monetary value), and increase sales volume [55, 80]. Through their ability to relay information in a dyadic, low-effort manner conversational RS (e.g., CRS, chatbots) can also facilitate user engagement, loyalty, and customer retention via the preference elicitation process [19, 40] that mimics the value-adding interpersonal dynamics of human-based service interactions [4, 16].

LLM technology therefore represents a paradigm-shift the strategic potential of CRS [61]. By improving both conversational dynamics [97] and recommendations [71], LLMs can increase productivity between 30-45% whilst enhancing the customer experience [67]. Considering that for SMEs, fine-margins and relational outcomes dominate strategical positioning [96] and that humanized and personalized feedback are features of chatbots previously found to most readily distinguish an SMEs service offering compared to rivals [88, 90], LLM-driven CRS therefore represent a high-potential technology for untapping business value for SMEs.

2.2 Frameworks for LLM-driven CRS

While the opportunity presented by LLM-driven CRS for SMEs is clear, the scaling up of data and parameters has made implementation less so. New capabilities of LLMs such as in-context learning (ICL) [10, 60, 86], adherence to instructions [95], and planning and reasoning [100, 102, 103] have the potential to create state-of-the-art CRS. Nonetheless, the implications of these developments for user queries and seamless communication remain. For SMEs, this is a notable barrier due to the relative weight that each customer interaction has on the overall business performance, and the reality that SMEs are less able to absorb the negative effects of occasional poor customer service or change to alternative system designs [27] compared to larger firms. To overcome these challenges, three prominent frameworks using LLMs in CRS have been introduced [22, 25, 33]. To date, however, it remains unclear how the relevant aspects of each framework can be utilized for effective context-specific use by an SME.

Table 1 summarizes these frameworks’ by how the LLM was used in the CRS, which LLM was used, and its function.

Table 1: Overview of frameworks for LLMs in CRS.

Framework	Use of LLM in CRS	Used LLM	Function
RecLLM [25]	As a dialog management module for orchestrating calls to other modules and for conversation	Fine-tuned version of LaMDA LLM [93]	To rank slate recommendations from an RS so as to match user preferences and enhance personalization by adjusting session contexts to natural language-based user profiles
InteRecAgent [33]	As the logic for discerning users’ intentions and for conversation	GPT-4	To trigger sequences of API calls for generating conversational responses based on outcomes from RS tools
LLMCRS [22]	As an orchestrator of subtasks and for conversation	Flan-T5-Large [17] and LLaMA-7b [95], both fine-tuned	To divide the RS workflow into stages of subtasks that are performed every iteration

2.3 Evaluation of LLM-applications

Besides the technical choices faced when implementing an LLM-driven CRS, of equal importance are customer ratings and its economic viability. While extant research has examined LLMs across diverse application areas, including finance [104], education [51], chemical engineering [56], as well as domain-independent frameworks [44, 94], these works have concentrated on evaluating performance against state-of-the-art techniques or comparative evaluation against benchmark techniques and/or human annotators [64], rather than real user feedback and business-critical factors such as system costs and latency.

In traditional RS research, the ResQue framework has been widely applied to evaluate users’ subjective ratings of the RS [83]. The ResQue model states that user-perceived quality factors (e.g., recommendation accuracy) influence users’ beliefs about the system (e.g., perceived usefulness), shaping user attitudes (e.g., satisfaction) and leading to behavioral intentions (e.g., intention to use the system) [83]. A strength of the framework has been its ability to unify evaluations of user experience across different application areas such as e-commerce [83], music [46], travel [7], and movies [81]. Arguably of greater importance, evaluations captured using ResQue aim to capture the holistic user experience of an RS within its application context, rather than simply measuring the performance of the RS algorithm alone [84].

The applicability of ResQue to LLM-driven CRS has been questioned recently on two counts however: First, as RS have evolved into interactive, dialogue-based systems powered by AI [38] the original ResQue model is unlikely to fully reflect the current user experience. For example, factors relating to Interaction Quality (e.g., Consistency, Coherence, and Input Processing Performance) have potentially far greater relevance for LLM-driven CRS than for CRS with script-based conversational flows. Second, anchoring subjective user evaluations (i.e., survey responses) in real system events (i.e., objective user-interaction data) can resolve ambiguity about why certain constructs scored poorly [38].

While recent research has suggested adaptations to ResQue for LLM-driven CRS [38, 47], these adaptations have not yet been empirically validated in the field. As such, we extend and test a revised ResQue model for LLM-driven CRS. Our multi-method approach of combining subjective user data with objective system data follows recommendations to update ResQue with the advent of AI-technologies [38], as well as recent guidelines for making information systems research more relevant to practitioners [70].

3 Business Context

To investigate the system design and user evaluation of LLM-driven CRS from an SME perspective, we partnered with a startup in the leisure industry. We collaboratively implemented EventChat, a LLM-driven CRS introduced in the latest update of the startup’s smartphone app. The system facilitates user exploration of events and activities in a major German city and complements other features in the app, such as a filter-based search, an interactive map, and a calendar overview. The development of EventChat was motivated by two main business objectives: (i) to improve the user experience through enhanced event discovery, and (ii) to mitigate shortcomings with the firm’s web scraping strategy, which often resulted in event listings with missing information, by employing a LLM-driven CRS that can parse and interpret this missing information.

4 System Design

4.1 Business-driven Design Choices

Several design choices for the LLM-driven CRS were made to balance strategic aims from the SME’s perspective, with feasibility and technical optimization. First, ChatGPT was used as the underlying LLM of the CRS, as it utilizes many of the novel LLM capabilities including in-context learning [10, 60, 86], adherence to instructions [95], as well as planning and reasoning [100, 102, 103].

Second, prompt-based learning was used following previous research using GPT4 [33]. This choice was driven by implementation feasibility for an SME relative to alternative approaches such as fine-tuning. Prompt-based learning does not require large amounts of training data from past user interactions or generated synthetic data, both of which are costly for SMEs to obtain in terms of time, finances, or engineering efforts. Additionally, frameworks necessitating fine-tuning rely on base models with significantly fewer parameters than ChatGPT [22, 25].

Third, calling an LLM API can be highly costly, and so we implemented an attribute-based question-answering CRS [52, 111, 112], where the system and users engage in question-answering about desired item attributes in as few rounds as possible. Notably, this approach went against the dominant approach in extant chatbot research that emphasizes the value of increased anthropomorphization and ‘chit chat’ [77].

4.2 Architecture

Figure 1 provides an overview of EventChat’s architecture, which was implemented as a turn-based dialog system. The back end calls endpoints of external resources like the startup’s relational database, vector database, recommendation engine, or internet-based information sources.

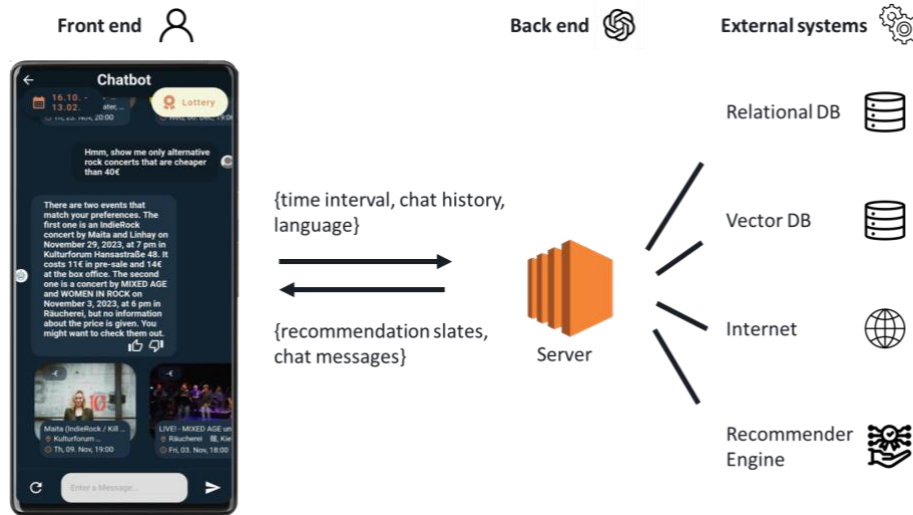


Figure 1: Architecture of EventChat

4.3 Front End

The front end was designed using the Flutter framework [24]. To address the time dependency in event discovery, we configured EventChat to consider events occurring within the next 150 days by default. Nevertheless, users could define a custom time interval using a static button located in the top left corner of the interface. To enhance relevance, we included this user-specified period as a query parameter to EventChat.

The system implementation also gave users the choice to search for specific events or receive general recommendations based on their past preferences. In each session, users were prompted to make this selection by clicking buttons within the chat interface. Such a hybrid approach of including buttons in a chat interface has been found to increase user-perceived control [36, 73]. However, our main rationale behind including this feature was to optimize the usage of resources and economize on costs, as it helped us reduce iterations and calls to the LLM API. As previous research has shown that users expect information about items to be presented through a dedicated recommendation slate, making it easy to find more details [25, 43], we also used a visibility detector in the front end that tracks the last three event card summaries shown to the user. This information was then sent to the back end to give the LLM the needed context.

Our design of EventChat also leveraged insights from extant research related to conversational user interfaces (CUIs) and the incorporation of anthropomorphic features. To support search functionality and the possibility to easily access further information [43], we incorporated carousel cards as a front end component. Regarding anthropomorphism, we focused only on features that were simple to implement and would not increase operational costs (see Figure 2), such as an avatar (a pictorial representation of the chatbot [76]), a concise self-introduction [78], and the use of ChatGPT [11].

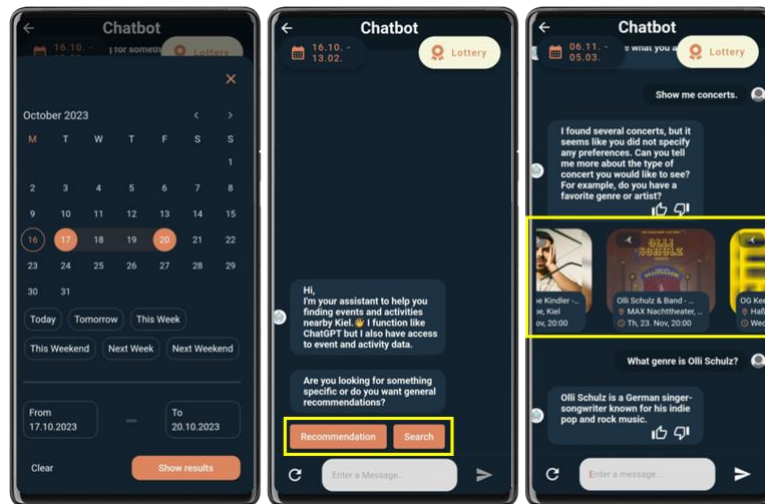


Figure 2: Illustration of time interval interface (left), case selection (middle), and highlighted visibility detection in recommendation slates (right) within EventChat's front end

4.4 Back End

4.4.1 Overview

Each conversation with EventChat was divided into turns. Turns are initiated by the user taking an action in the front end (i.e., in the chat interface), with EventChat responding and, depending on the context, providing recommendation slates (cf. Figure 3). This stage-based approach was inspired by Feng et al. [22, 25]. Following other works [25, 33], we also tried an agent-based approach to enhance the flexibility and sophistication of the system (e.g., whole-day trip planning). However, we observed that can lead to: (i) excessive LLM calls, yielding high costs and latency (as highlighted in previous research [101]), and (ii) ChatGPT-specific performance issues (as discussed in practitioner circles [29]). Given the importance for SMEs of cost minization, system stability, and low latency, we chose the low design complexity offered by the stage-based architecture [72]. Simultaneously, our use of prompt-based learning eliminated the need for training data.

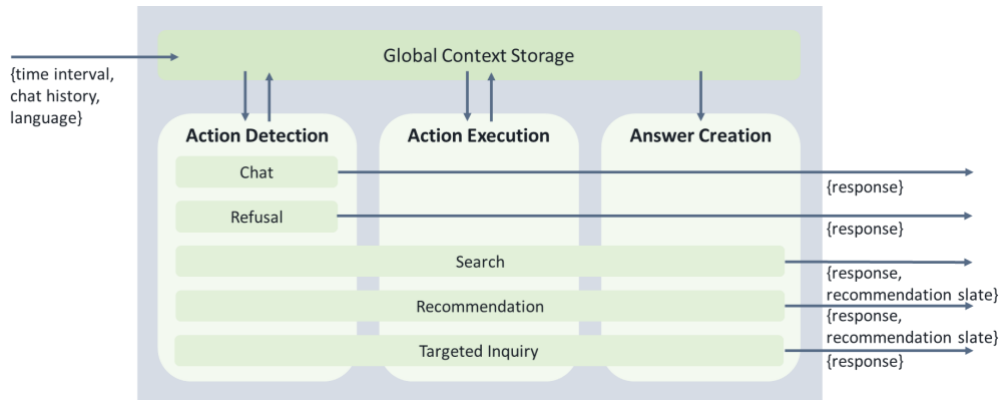


Figure 3: Conceptual architecture of EventChat’s back end

Recommendations were personalized to users based on their contexts. This included language, date/time of interest, and preferences communicated through the chat interface. Depending on the stage in a user-system conversation, one of the five following actions was used: (i) Chat: EventChat directly answers the user; (ii) Refusal: EventChat responds with a pre-defined message since the user response was either inappropriate or off-topic; (iii) Search: EventChat initializes the search workflow, creating a recommendation slate of items based on the user’s query derived from their context; (iv) Recommendation: EventChat initializes the recommendation workflow, creating a recommendation slate based on the user’s preferences derived from past interactions in their context, or (v) Targeted Inquiry: EventChat starts the Targeted Inquiry workflow that answers a user’s question for a specific event by gathering additional information via a database query or website.

4.4.2 Prompt Design

We used ChatGPT to carry out the dedicated tasks within each stage of EventChat’s workflow. When designing prompts for the stages, we faced a trade-off between response quality and latency, and costs. Specifically, we noticed that the LLM’s response quality decreased as our prompts became more complex (i.e., containing more information, instructions, or tasks, leading to longer prompts). To improve response quality, each sub-task could be split into separate prompts, however, each call would need repeated output format instructions, leading to more token usage and higher latency due to the extra time needed for multiple calls. Additionally, splitting tasks into several prompts would not always be feasible as longer prompts might be necessary to provide important context to the LLM.

After testing several prompt versions, the final prompts balanced these trade-offs by minimizing the number of LLM API calls while still delivering high-quality responses. In the back end, stages were defined by the number of tasks that could be handled within each prompt. For example, a response for the Chat action could be generated within the Action Detection phase prompt, making a separate prompt for this action unnecessary. From a prompt-design perspective, we used techniques like Few-Shot CoT and Few-Shot ICL to help the LLM perform specific business tasks [54]. We also used schema-based

format instructions to accurately interpret the LLM's outputs, following the methodology outlined in the langchain implementation [13].

4.4.3 EventChat Action Modules

We implemented three dedicated modules for the Search, Recommendation, and Targeted Inquiry actions. Our Search and Recommendation workflows followed the principles of the RAG technique: First, we created a candidate set based on the user's query (Search) or past interactions (Recommendation). To get a highly relevant candidate set ordered by relevance, we then applied filters to the startup's Amazon Personalize instance or vector database if keywords could be extracted from the user's query. Second, we used ChatGPT as a ranker to determine whether the shown events matched the user's query. To contextualize ChatGPT we included textual summaries of the events in the prompt. In contrast to previous work [25, 33], we simultaneously ranked up to 10 items per prompt, with our ranking only distinguishing whether the event matches the user's intention or not. Finally, we created a user response by combining an answer based on the user's request or interest with the suggested events. The stage Targeted Inquiry allowed users to get specific information about an event. To enable this, we generated a comprehensive textual description of an event, using the startup's database of events or obtained information from an event website. We were able to include all existing information within ChatGPT's token limit of 4096 tokens due to the sparsity of metadata. Overall, our approach contrasts previous work [33] where the LLM was used to create an entire SQL statement based on context about the database structure to answer user queries. While we also experimented with such an approach, it failed due to the complexity of the startup's relational database structure, which adhered to the Boyce-Codd normal form (BCNF) requiring multiple table joins. Additionally, due to web scraping, our database contained columns that were often sparse. Although technically possible in principle, adapting the LLM for such business constraints would have led to further complexities for the querying process.

4.5 Challenges and Limitations of Integrating ChatGPT in CRS

We noted several challenges in integrating LLMs in CRS. Most pressing was EventChats tendency to overlook contextual information and its susceptibility to hallucinations (e.g., suggesting fictional events), and the token limit constraint of 4096 for input and output [68]. We also noticed that the CRS occasionally failed to utilize information presented in the LLM prompt. This oversight could lead to situations such as the CRS recommending events with higher prices than the user's expressed willingness to pay. This could arise because the LLM would not attend to price information in the textual summary of an item during the reduction phase. For this same reason, we were able to circumvent the Refusal action in the Action Detection module when testing EventChat against prompt injection attacks. However, this only proved successful with some internal knowledge about the logic of the prompt template.

Additionally, we found that the answer prompt’s lack of context (such as the quality and quantity of events) in the SMEs database could cause problems. For example, if a user asked for a specific event like “stand-up comedy” and EventChat found few options, it might prompt the user to refine their question by asking what type of stand-up comedy they preferred, which would only be suitable if the user had asked for a broad category like “concerts”. The challenge lay in that ChatGPT was unaware that with a more precise user request, the search might still not find a perfect match due to limited data details, lack of matches, or both.

Overall, these observations highlight inherent limitations of LLMs for integration in user-facing business technologies such as CRS, and suggest that practitioners and researchers may face trade-offs between technical feasibility and theoretical optimality for implementation. Despite these issues, however, EventChat still provided various features (search capabilities, recommendations, detailed event information) with the potential to enhance the customer experience.

5 Evaluation

5.1 Methodology

We conducted a field study capturing both subjective and objective evaluation metrics. The subjective metrics were gathered using a survey based upon the ResQue framework [83], refined into a short-form version suitable for CRS evaluation in the field, and evaluated using a structural equation model (SEM). The objective metrics included latency, token consumption (as a cost indicator), and log data concerning the system’s inputs, outputs, and interim results.

5.1.1 Survey Design

We designed our survey following the ResQue model [83] and Jannach’s [38] catalog of subjective measurement dimensions for CRS evaluation (details in Appendix A.1). As we conducted a field study with real users, we minimized participant burden by including only one item per construct in line with previous applications of ResQue model in non-CRS domains [20, 50]. Following recommendations for applying ResQue [84] we assessed the overall user experience of EventChat rather than the performance of the underlying technologies, such as ChatGPT and Amazon Personalize [84]. As such, our survey followed the traditional ResQue dimensions, but with Consistency, Coherence, and Input Processing Performance constructs added (see Figure 4) to assess the conversational dynamics innate to LLM-driven CRS. All items were assessed using a 5-point Likert scale ranging from 1 (disagree) to 5 (agree) to ensure correct display across a variety of smartphone devices.



Figure 4: Conceptual CRS-adapted ResQue model

In addition to the ResQue items, the survey also asked respondents if their request was successfully fulfilled (Success) or not. When successful, we asked participants for Perceived Effort as per Loepp et al. [62], and when unsuccessful, we requested open-ended text feedback on problems experienced (General Problems).

5.1.2 Objective User-interaction Metrics

For each user interaction with EventChat, we monitored several key metrics: latency, token usage, and log data. These metrics were recorded for every request made to the LLM API, corresponding to each prompt call. Additionally, we measured the total duration of a request on the application’s front end, including the round-trip time to the server. Latency metrics served as an estimate of the user’s loading time, while token usage data translated into operational costs, both of which are vital strategic considerations for businesses. By analyzing these metrics at the level of individual prompts, we were able to pinpoint the sources of the most significant performance bottlenecks. In addition, by collecting log data we were able to analyze ChatGPT’s output so as to identify irregularities and edge cases.

5.1.3 Data Collection

Participants accessed the survey via a link labeled as ‘Lottery’ in the app (cf. Figure 2) that offered participants a chance to win one of three Amazon vouchers worth €50 each. Data collection occurred between 18.10.2023 and 14.12.2023. Respondents were either: (i) existing users of the startup’s app who accessed the corresponding screen in the app, or, (ii) individuals recruited on Instagram from 29.10.2023 to 11.11.2023 using a total campaign budget of €22 (24 USD). Our sample thus consisted of both new and existing users, capturing a broad cross-section of user types, improving external validity. A total of 108 participants conducted the survey. After filtering out non-completes ($n = 20$) and those who did not interact with EventChat according to the log data ($n = 5$), a total of 83 observations were available for analyses (43.8% female; Mage = 28.3, SD = 11.0). Only the log data, cost, and latency for these 83 survey participants that used the app were analyzed to ensure comparability between objective and subjective data.

5.2 Results

5.2.1 Subjective Ratings of the User Experience

We found that 85.5% ($n = 71$) of users rated Recommendation Accuracy as neutral or good. Recommendation Accuracy, however, also had the highest number of negative appraisals of all User Perceived Quality and User Beliefs constructs (15%, $n = 12$), with a further 66.7% ($n = 8$) of these users indicating that the CRS failed to fulfill their request(s) (Success), contrasting the overall Success rating of 83.1% ($n = 69$). Examining the log data showed a median of 2 turns to identify a suitable event, consistent with the low perceived effort reported by participants. Loading times were reported as problematic by three users (General Problems) which was confirmed by the high latency metrics detailed in section 5.2.4.

5.2.2 Root Cause Analysis: Understanding why EventChat failed to fulfill requests

To investigate underlying causes of failed user requests (Success), we examined the session logs, identifying the following failure categories: missing relevance of suggested events, failed Targeted Inquiry actions, and issues defining the time and location of the suggested events. The most reported issue concerned the relevance of suggested events. In many cases, the requested events did not exist in the database or were not properly categorized (e.g., a music concert was wrongly categorized as “Other”) as a consequence of web scraping. Other cases stemmed from our design of the Recommendation action that applied time filters only following the approach of Wang et al. [98], rather than also query parameters (e.g., event category). This lack of additional filters when creating the candidate set with Amazon Personalize led to recommendation underperformance, indicating the necessity for user-specific filters to optimize recommendation performance.

Several participants also encountered issues with EventChat recognizing their questions related to an event (Targeted Inquiry action). In most cases, the EventChat either opted for the Refusal action or failed to establish a connection between the question and one of the events stated in the prompt highlighting limitations of prompt-based learning techniques that rely on extensive information. Other flaws in prompt-based learning were also identified via log data (e.g., unrequested language switching).

Finally, most users communicated their time preferences directly in the chat rather than using the UI button. As a result, the candidate set was generated with default time filters, and ChatGPT did not consider the user’s specified time information during the reranking phase, leading to suggestions that did not match the user’s time requirements. Thus a more user-friendly LLM-driven CRS would extract all necessary information from the chat.

5.2.3 Results from Structural Equation Model

The SEM showed adequate fit across most indices ($\chi^2(22) = 33.942$, $p = 0.050$, CFI = 0.948, TLI = 0.917, RMSEA = 0.081, SRMR = 0.087). A full table containing path coefficients can be found in

Appendix A.2.3, and a visualization in Figure 5. The path coefficients between User Perceived Quality and User Beliefs constructs showed that Recommendation Accuracy ($\beta = .36, p < .01$) and Consistency ($\beta = .352, p < .01$) were positively associated with higher ratings of Perceived Usefulness. Input Processing Performance was positively associated with higher Control ($\beta = .319, p < .05$), and Control in turn with higher ratings of Perceived Usefulness ($\beta = .202, p < .05$). Examining the paths between User Beliefs and User Attitudes constructs showed that Perceived Usefulness was significantly linked to higher Confidence ($\beta = .683, p < .001$) and Overall Satisfaction ($\beta = .513, p < .001$). Lastly, examining the relationship between User Attitudes and Behavioral Intentions, Overall Satisfaction was correlated with higher Future Use ($\beta = .503, p < .001$).

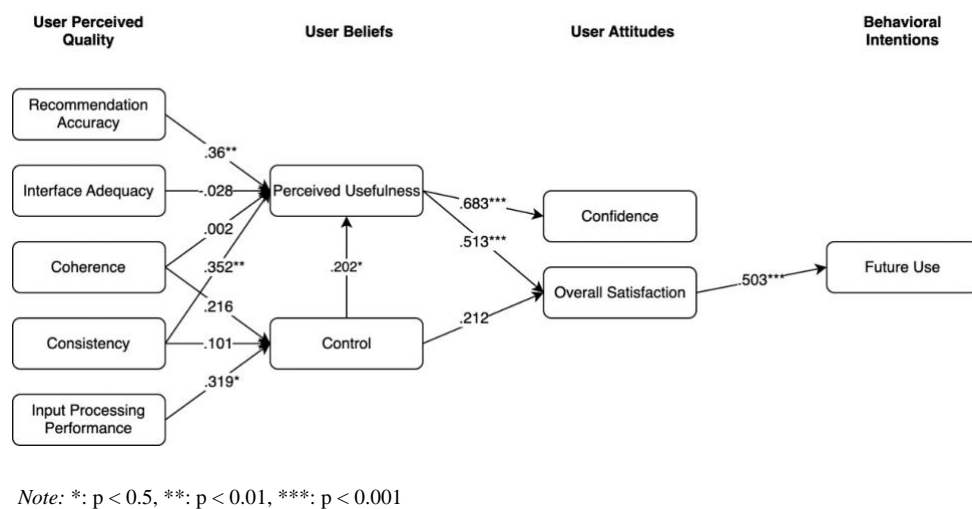


Figure 5: The Structural Equation Modeling (SEM) results.

5.2.4 Performance Metrics

With a median latency of 5.7 seconds per message and a median token usage of 18'106, EventChat exhibited relatively high latency in conjunction with high token usage. Table 2 presents an overview of token usage and latency, aggregated over all chat sessions of the survey participants.

Table 2: Token usage and latency metrics for chat sessions associated with survey participants.

Median tokens used per chat message	Median tokens used per chat session	Median latency per message	Median latency per chat session
18106	56325	5.7s	13.7s

Table 3 displays the consumption of tokens as well as the needed time in more detail per action or stage. The data shows that the reduction of candidate items, as derived from the Search or Recommender prompts, consumed the most resources.

Table 3: Token usage and latency per module or phase.

Phase/ action	Median tokens used per chat message	Median latency per message
Action Detection (including Chat, Refusal)	2622	2.7s
Targeted Inquiry	852	0.6s
Search	1724	1.6s
Recommender	796	1.2s
Reduction	23408	4.0s
Answer creation	2419	2.6s
<i>Note: Median of the sum of tokens used per Reduction module call</i>		

6 Discussion

6.1 System Design Implications

Based on findings presented in the current paper, we outline four design contributions that enhance our understanding of LLM-driven CRS for SMEs, addressing the significant challenges and opportunities for their design:

First, during the implementation process, we encountered a critical trade-off between quality of the user experience and constraints of cost and latency, which was particularly evident in the architecture and prompt design. Architecturally, we opted for a stage-based approach, contrasting previous research which has generally emphasized the high potential of agent-based approaches (e.g., for industrial automation [105] or chemical engineering [9]). This was motivated by the need to address stability issues with ChatGPT, while aligning with SME requirements concerning latency and cost. On the prompt design level, our approach also contrasts other frameworks that optimize LLM performance through prompting strategies [15, 53, 69, 109], ignoring business-critical trade-offs. While some LLM research has examined these trade-offs to date (see Zong et al. [110] on model performance and text classification costs or Hämäläinen et al. [30] on data quality, latency, and cost trade-offs in synthetic data generation), our study goes further by focusing on an applied implementation relevant to business practice.

Second, we demonstrated feasibility of prompt-based learning approaches, but noted quality issues. Our approach, inspired by the InteRecAgent framework [33], relied heavily on techniques like ICL or Few-shot CoT, without model fine-tuning. While these techniques offered simplicity and flexibility, ideal for SMEs, longer prompts were required capture more detailed information. This detailed content was however sometimes missed or misunderstood by ChatGPT, as found in extant research [106], leading to lower Consistency and Coherence ratings. Due to constraints of context window length, cost, and latency it proved unfeasible to create a response prompt considering all eventualities however. While a unified dialog manager would be aware of its available tools and could mitigate this risk [25], the absence of detailed information would remain. Our research therefore underscores both the potential and challenges in utilizing prompt-based approaches.

Third, we identified that using a several-billion-parameter LLM as a reranker in the RAG technique was prohibitively expensive. While simple in design, the reduction phase was a major cost driver with a median of 4.6 cents per message, assuming the current rate of \$0.002 per 1'000 tokens for input and output [68]. With a median of 4s, it also contributed significantly to latency. While this could be ameliorated by adopting an individual item reranking approach, as done in the RecLLM framework [25], this would consequentially increase costs. We find therefore that approaches using LLMs as an item reranker [25, 100, 107] are unsuitable for SMEs in production use, even when utilizing a LLM with fewer parameters, ruling them out as a strategic possibility.

Fourth, findings showed that users' predominantly used the chat interface to communicate time preferences rather than the dedicated button, suggesting that all relevant parameters for recommendation should be captured directly within the chat. While research has found that users subjectively report increased control when integrating buttons to non LLM-based artifacts [36, 73], we find this does actually not align with intuitive objective user behaviors with LLM-driven CRS.

6.2 Managerial Implications

Our case study reveals key managerial implications for SMEs when adopting LLM-driven CRS. First, cost and latency challenges are evident for systems that depend on external LLM APIs. In our implementation, operational costs averaged 3.6 cents per message and 11.2 cents per chat session, implying that such systems are currently best suited for high-margin scenarios only. Additionally, with an average of 5.7 seconds to process a message and 13.7 seconds per session that latency was relatively high. While EventChat users generally reported low perceived effort (suggesting that the efficiency gains from using EventChat outweighed the impact of load times for most users) managers should carefully balance recommendation performance versus waiting times.

Second, although we anticipated that libraries like Langchain would make implementation straightforward [94], creating a LLM-driven CRS appropriate for long-term production use involved numerous complications. On the one hand, the implementation of an LLM-driven CRS requires less ML expertise, reducing the need for skilled labor which is a known barrier to adoption [2, 87, 88]. On the other, relying solely on prompt-based learning revealed several limitations and alternative techniques to overcome these challenges also pose trade-offs: Opting for a more advanced LLM reduces cost-effectiveness, while fine-tuning an LLM adds complexity, making it less suitable for SMEs. For any system design selected, businesses should also anticipate what measures are necessary against abusive usage, further contributing to the system's complexity.

Third, our experience in designing EventChat indicates that while implementing a LLM-driven CRS is feasible, even for resource constrained SMEs, whether to do so necessitates careful consideration and strategic planning to ensure they can effectively reach organizational goals, especially when compared to other simpler artifacts (e.g., RS, scripted chatbot etc.). This perspective resonates with Ivanov and

Webster’s [37] emphasis on a detailed cost-benefit analysis prior to the adoption of AI tools, aligning technical trade-offs of an implementation with the capacity and objectives of the business.

6.3 Theoretical Implications

The current paper advances theory by extending short-form ResQue model to the evaluation of an LLM-driven CRS in the field, a technology revolutionizing digital services and IS research [23]. Results showed that Perceived Usefulness was positively associated with User Satisfaction and Intention to Use the system, Recommendation Accuracy with higher Perceived Usefulness, and User Control with higher overall user Satisfaction in the system. These findings corroborate extant research in RS [3, 12, 32, 42, 48, 49], conversational agent domains [85] as well as the original ResQue framework [83], showing the extent to which previous findings from the ResQue literature are applicable in the age of LLM-driven CRS.

Nevertheless, our results also displayed several deviations in the User Perceived Quality dimension, whereby Coherence and Interface Adequacy were insignificant predictors. This is notable, as it contrasts Jannach’s [38] recently proposed catalog of subjective measurement dimensions for CRS evaluation which had not yet been empirically verified. Additionally, our ResQue model incorporated Input Processing Performance and Consistency to capture conversational dynamics vital to LLM-driven CRS following suggestions in recent publications [14, 18], validating their inclusion into a ResQue model for LLM-driven CRS for the first time. This contrasts alternative approaches that have since emerged in CRS research, which while not tested using an LLM-driven CRS, have suggested use of up to eight new constructs to capture conversational dynamics [47]. Our results indicate that such an extensive approach may not be necessary. The revised, short-form ResQue model we presented also omitted several constructs yet exhibited adequate fit, mitigating the risk of participant burden, reduced survey completion, and thus validity of the survey-based model estimates. Given the anticipated widespread adoption of LLM-driven CRS in the coming years [23], our short-form ResQue model enables field replicability in a rapidly evolving domain.

Lastly, our research provides an illustrative example of the benefits utilizing objective metrics in combination with subjective user evaluations. For example, examining log data revealed that reliance on prompt-based learning alone caused inconsistent answers concerning the item corpus or the CRS’s capabilities. Our findings also suggested that users value consistent CRS responses since they minimize the need for correcting system errors. While this issue has been acknowledged in conversational agent research previously [45, 59], empirical evidence has been missing. Additionally, by combining subjective and objective measures, our results better elucidate the limitations of LLMs that our system inherited, such as hallucinations and overlooking user information. These issues affected both conversational metrics and traditional recommendation system metrics like Recommendation Accuracy through our use of ChatGPT as a reranker in the RAG technique. From a broader perspective, this raises a critical question regarding how to evaluate LLM-driven CRS; namely, to what extent should

evaluations focus on the LLM's performance given its substantial influence on the perceived effectiveness of the CRS: While the LLM's role in these frameworks is crucial due to its impact of system effectiveness and user adoption, it is challenging to separate LLM-related performance from performance of the system as a whole. Overall, this underscores the need to apply theoretical models such as ResQue to aid cross comparability between applications [99].

6.4 Limitations

Our research has several limitations that should be acknowledged. First, the CRS implementation and data presented were contextualized to the specific needs of a startup in the leisure industry. While this single context could potentially limit generalizability, our use case exhibited characteristics that are highly applicable to SMEs: a diversity of item categories, sensitivity to user pricing, and most critically, the time dependence inherent in events. This adds a layer of realistic complexity reflective of common business-specific challenges across CRS applications. However, this also means the design principles and features we discussed are not transferrable to all LLM-driven CRS contexts, particularly those for larger enterprises or organizations where a resource-conscious implementation is less critical.

Second, our SEM was estimated on a relatively modest sample size. The participant pool was also young, as a direct consequence of the study context (i.e., leisure event discovery) that may affect the generalizability of our results to other populations (e.g., older adults). Additionally, the use of single-item measures for our constructs may have compromised the internal validity, however, this was mitigated by our use of measures well-established in the RS domain [38, 83] and the straightforward nature of the constructs under investigation [6]. Balanced against these potential negatives, however, was the high external validity of our study data, which featured actual users of an LLM-driven CRS in the field. Given that LLMs are currently revolutionizing business and society, we argue that the benefits of the data presented outweigh the negatives.

Third, to reduce participant burden, we shortened the ResQue model. This was achieved in line with the recommendations of Jin et al. [47], where constructs not relevant to the use case or system design were excluded. For instance, we did not include Recommendation Novelty due to events' time-sensitive nature (i.e., the CRS only recommended upcoming events). Similarly, given that our interface allowed for easy additional information retrieval by clicking on cards, we did not consider Information Sufficiency. While these omissions were both necessary and informed by theory, it is possible that these omitted variables could have some explanatory power.

6.5 Future Research

We recommend the following research directions (RD) for LLM-driven CRS moving forward. Exploring the use of a more advanced LLM featuring more parameters like GPT-4 (RD1) would allow for an agent-based approach [33], which may resolve issues related to the LLM overlooking the information provided, for example, by using prompt-based learning. Alternatively, use of fine-tuned

LLMs with fewer parameters (RD2) as done by Friedman et al. [25] and Feng et al. [22] could better control for latency and costs. Besides examining the CRS's underlying LLM, exploring easy and resourceful methods for generating training data and mitigating fine-tuning costs would be useful (RD3), as this is often challenging for SMEs to acquire. Future frameworks for LLM-driven CRS could also focus on approaches that enable the incorporation of fine-grained and often subtle knowledge about the item corpus when formulating responses to users (RD4).

Besides technical considerations, examining strategic drivers for LLM-driven CRS adoption would be useful (RD5) [38]. This could include relative benefits offered over traditional search methods (e.g., use of filters) and developing a decision-making framework similar to that taken by Schuetzler et al. for chatbots [87]. Alternatively, research could examine exactly how LLM-driven CRS add value on the firm-level, such as by enhancing customer-company information exchange [58] or empirically measuring financial value (e.g., sales) derived from LLM-driven CRS interactions as previously explored in RS domains [80]. Lastly, we would encourage future research to further test and refine our short-form ResQue model in new contexts to ensure its reliability (RD6). Use of novel methods such as using LLMs to assess outputs from LLMs [26, 101] or the user simulation-based CRS evaluation framework [108] may also usefully supplement real field data such as ours (RD7).

7 Conclusion

Successful implementation of LLM-driven CRS for SMEs depends on multiple factors: acceptable user waiting times, resource usage, and realistic feature expectations. Our research showed that, while feasible, deploying a LLM-driven CRS as an SME requires careful consideration of system effectiveness, economic viability, and strategic rationale for doing so. In our implementation, we identified several potentially problematic design choices, including solely relying on prompt-based learning and the use of ChatGPT as a ranker in the retrieval-augmented generation (RAG) technique. Despite the limitations of these technologies, users rated the LLM-driven CRS positively, thus indicating that the system design could be rolled out on a wider scale. To ensure the long-term strategic viability of LLM-driven CRS for SMEs, we encourage researchers to explore other novel approaches for LLM-driven CRS architecture.

8 References

- [1] E. Aimeur and F.S.M. Onana. 2006. Better control on recommender systems. In *The 8th IEEE International Conference on E-Commerce Technology and The 3rd IEEE International Conference on Enterprise Computing, E-Commerce, and E-Services (CEC/EEE'06)*. IEEE. DOI: <https://doi.org/10.1109/cec-eee.2006.17>.
- [2] Philip Alford and Stephen J. Page. 2015. Marketing technology for adoption by small business. *The Service Industries Journal* 35, 11-12, 655–669. DOI: <https://doi.org/10.1080/02642069.2015.1062884>.

- [3] Bart P. Knijnenburg, Svetlin Bostandjiev, John O'Donovan, and Alfred Kobsa. 2012. Inspectability and control in social recommenders. In . DOI: <https://doi.org/10.1145/2365952.2365966>.
- [4] Izak Benbasat and Weiquan Wang. 2005. Trust In and Adoption of Online Recommendation Agents. *Journal of the Association for Information Systems* 6, 3, 72–101. DOI: <https://doi.org/10.17705/1jais.00065>.
- [5] Carina Benz, Lara Riefle, and Gerhard Satzger. 2024. User Engagement and Beyond: A Conceptual Framework for Engagement in Information Systems Research. *CAIS* 54, 331–359. DOI: <https://doi.org/10.17705/1CAIS.05412>.
- [6] Lars Bergkvist and John R. Rossiter. 2007. The Predictive Validity of Multiple-Item versus Single-Item Measures of the Same Constructs. *Journal of Marketing Research* 44, 2, 175–184. DOI: <https://doi.org/10.1509/jmkr.44.2.175>.
- [7] Joan Borràs, Antonio Moreno, and Aida Valls. 2014. Intelligent tourism recommender systems: A survey. *Expert Systems with Applications* 41, 16, 7370–7389. DOI: <https://doi.org/10.1016/j.eswa.2014.06.007>.
- [8] Boston Consulting Group. 2019. The Company of the Future. *BCG Global* (Apr. 2019).
- [9] Andres M. Bran, Sam Cox, Oliver Schilter, Carlo Baldassari, Andrew D. White, and Philippe Schwaller. 2023. *ChemCrow: Augmenting large-language models with chemistry tools*.
- [10] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. *Language Models are Few-Shot Learners*.
- [11] Zhenguang G. Cai, David A. Haslett, Xufeng Duan, Shuqi Wang, and Martin J. Pickering. 2023. *Does ChatGPT resemble humans in language use?*
- [12] André Calero-Valdez, Martina Ziefle, and Katrien Verbert. 2016. HCI for Recommender Systems. In *RecSys'16. Proceedings of the Tenth ACM Conference on Recommender Systems : September 15-19, 2016, Boston, MA, USA*. The Association for Computing Machinery, New York, NY, 123–126. DOI: <https://doi.org/10.1145/2959100.2959158>.
- [13] Harrison Chase. 2023. *Langchain Documentation* (September 2023). Retrieved September 29, 2023 from <https://www.langchain.com/>.
- [14] Qibin Chen, Junyang Lin, Yichang Zhang, Ming Ding, Yukuo Cen, Hongxia Yang, and Jie Tang. 2019. Towards Knowledge-Based Recommender Dialog System. *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, 1803–1813. DOI: <https://doi.org/10.18653/v1/D19-1189>.
- [15] Silei Cheng, Zhe Gan, Zhengyuan Yang, Shuohang Wang, Jianfeng Wang, Jordan Boyd-Graber, and Lijuan Wang. 2023. Prompting GPT-3 To Be Reliable. *International Conference on Learning Representations (ICLR 23)*.
- [16] Jaewon Choi and Hong J. Lee. 2014. An Integrated Perspective of User Evaluating Personalized Recommender Systems : Performance-Driven or User-Centric. *Journal of Society for e-Business Studies* 17, 3.
- [17] Hyung W. Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang S. Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Alex Castro-Ros, Marie Pellat, Kevin Robinson, Dasha Valter, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Zhao, Yanping Huang, Andrew Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam

- Roberts, Denny Zhou, Quoc Le V, and Jason Wei. 2022. *Scaling Instruction-Finetuned Language Models*.
- [18] Francesco Colace, Massimo de Santo, Marco Lombardi, and Domenico Santaniello. 2019. CHARS: a Cultural Heritage Adaptive Recommender System. In *Proceedings of the 1st ACM International Workshop on Technology Enablers and Innovative Applications for Smart Cities and Communities*. ACM Digital Library. Association for Computing Machinery, New York, NY, United States, 58–61. DOI: <https://doi.org/10.1145/3364544.3364830>.
- [19] M. B. Dias, Dominique Locher, Ming Li, Wael El-Deredy, and Paulo J. Lisboa. 2008. The value of personalised recommender systems to e-business. In *Proceedings of the 2008 Workshop on Radiation Effects and Fault Tolerance in Nanometer Technologies. 2008, Ischia, Italy, May 05-07, 2008*. ACM Press, New York, N.Y., 291–294. DOI: <https://doi.org/10.1145/1454008.1454054>.
- [20] Francesco Epifania and Riccardo Porrini, Eds. 2016. *Evaluation of Requirements Collection Strategies for a Constraint-based Recommender System in a Social e-Learning Platform*, 1. DOI: <https://doi.org/10.5220/0005810903760382>.
- [21] Wenqi Fan, Zihuai Zhao, Jiatong Li, Yunqing Liu, Xiaowei Mei, Yiqi Wang, Zhen Wen, Fei Wang, Xiangyu Zhao, Jiliang Tang, and Qing Li. 2023. *Recommender Systems in the Era of Large Language Models (LLMs)*.
- [22] Yue Feng, Shuchang Liu, Zhenghai Xue, Qingpeng Cai, Lantao Hu, Peng Jiang, Kun Gai, and Fei Sun. 2023. *A Large Language Model Enhanced Conversational Recommender System*.
- [23] Stefan Feuerriegel, Jochen Hartmann, Christian Janiesch, and Patrick Zschech. 2024. Generative AI. *Business & Information Systems Engineering* 66, 1, 11–126.
- [24] Flutter. 2023. *Documentation - Flutter (2023)*. Retrieved October 25, 2023 from <https://docs.flutter.dev/>.
- [25] Luke Friedman, Sameer Ahuja, David Allen, Zhenning Tan, Hakim Sidahmed, Changbo Long, Jun Xie, Gabriel Schubiner, Ajay Patel, Harsh Lara, Brian Chu, Zexi Chen, and Manoj Tiwari. 2023. *Leveraging Large Language Models in Conversational Recommender Systems*.
- [26] Jinlan Fu, See-Kiong Ng, Zhengbao Jiang, and Pengfei Liu. 2023. *GPTScore: Evaluate as You Desire*.
- [27] Marcella B. Galvão, Raíssa C. de Carvalho, Lucas A. B. de Oliveira, and Denise D. de Medeiros. 2018. Customer loyalty approach based on CRM for SMEs. *JBIM* 33, 5, 706–716. DOI: <https://doi.org/10.1108/JBIM-07-2017-0166>.
- [28] Yunfan Gao, Tao Sheng, Youlin Xiang, Yun Xiong, Haofen Wang, and Jiawei Zhang. 2023. *Chat-REC: Towards Interactive and Explainable LLMs-Augmented Recommender System*.
- [29] gcsun. 2023. *GitHub Issue #1559: {tool_name} is not a valid tool, try another one. · Issue #1559 · langchain-ai/langchain (2023)*. Retrieved October 18, 2023 from <https://github.com/langchain-ai/langchain/issues/1559>.
- [30] Perttu Hämäläinen, Mikke Tavast, and Anton Kunnari. 2023. Evaluating Large Language Models in Generating Synthetic HCI Research Data: a Case Study. In *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems*. ACM Digital Library. Association for Computing Machinery, New York, NY, United States, 1–19. DOI: <https://doi.org/10.1145/3544548.3580688>.
- [31] Elizabeth Han, Dezhi Yin, and Han Zhang. 2023. Bots with Feelings: Should AI Agents Express Positive Emotion in Customer Service? *Information Systems Research* 34, 3, 1296–1311. DOI: <https://doi.org/10.1287/isre.2022.1179>.
- [32] Yoshinori Hijikata, Yuki Kai, and Shogo Nishida. 2014. A Study of User Intervention and User Satisfaction in Recommender Systems. *Journal of Information Processing* 22, 4, 669–678. DOI: <https://doi.org/10.2197/ipsjip.22.669>.

- [33] Xu Huang, Jianxun Lian, Yuxuan Lei, Jing Yao, Defu Lian, and Xing Xie. 2023. *Recommender AI Agent: Integrating Large Language Models for Interactive Recommendations*.
- [34] IBM. 2023. *AI assistants optimize automation with API-based agents - IBM Blog* (2023). Retrieved April 22, 2024 from <https://www.ibm.com/blog/ai-powered-assistants-optimize-automation-with-api-based-agents/>.
- [35] IBM. 2024. *What Are Large Language Models (LLMs)? | IBM* (2024). Retrieved April 30, 2024 from <https://www.ibm.com/topics/large-language-models>.
- [36] Andrea Iovine, Fedelucio Narducci, and Giovanni Semeraro. 2020. Conversational Recommender Systems and natural language: A study through the Converse framework. *Decision Support Systems* 131, 113250. DOI: <https://doi.org/10.1016/j.dss.2020.113250>.
- [37] Stanislav H. Ivanov and Craig Webster. 2017. *Adoption of Robots, Artificial Intelligence and Service Automation by Travel, Tourism and Hospitality Companies – A Cost-Benefit Analysis*.
- [38] Dietmar Jannach. 2023. Evaluating conversational recommender systems. *Artif Intell Rev* 56, 3, 2365–2400. DOI: <https://doi.org/10.1007/s10462-022-10229-x>.
- [39] Dietmar Jannach and Li Chen. 2022. Conversational recommendation: A grand AI challenge. *AIMag* 43, 2, 151–163. DOI: <https://doi.org/10.1002/aaai.12059>.
- [40] Dietmar Jannach and Michael Jugovac. 2019. Measuring the Business Value of Recommender Systems. *ACM Trans. Manage. Inf. Syst.* 10, 4, 1–23. DOI: <https://doi.org/10.1145/3370082>.
- [41] Dietmar Jannach, Ahtsham Manzoor, Wanling Cai, and Li Chen. 2022. A Survey on Conversational Recommender Systems. *ACM Comput. Surv.* 54, 5, 1–36. DOI: <https://doi.org/10.1145/3453154>.
- [42] Dietmar Jannach, Sidra Naveed, and Michael Jugovac. 2017. User Control in Recommender Systems: Overview and Interaction Challenges. *International Conference on Electronic Commerce and Web Technologies* 278, 21–33. DOI: https://doi.org/10.1007/978-3-319-53676-7_2.
- [43] Marie-Claire Jenkins, Richard Churchill, Stephen Cox, and Dan Smith. 2007. Analysis of User Interaction with Service Oriented Chatbot Systems. In *Human-computer interaction*, David Hutchison, Takeo Kanade, Josef Kittler, Jon M. Kleinberg, Friedemann Mattern, John C. Mitchell, Moni Naor, Oscar Nierstrasz, C. Pandu Rangan, Bernhard Steffen, Madhu Sudan, Demetri Terzopoulos, Doug Tygar, Moshe Y. Vardi, Gerhard Weikum and Julie A. Jacko, Eds. Lecture Notes in Computer Science. Springer Berlin Heidelberg, Berlin, Heidelberg, 76–83. DOI: https://doi.org/10.1007/978-3-540-73110-8_9.
- [44] Cheonsu Jeong. 2023. *A Study on the Implementation of Generative AI Services Using an Enterprise Data-Based LLM Application Architecture* 04. DOI: <https://doi.org/10.54364/AAIML.2023.1191>.
- [45] Di Jin, Sijia Liu, Yang Liu, and Dilek Hakkani-Tur. 2022. *Improving Bot Response Contradiction Detection via Utterance Rewriting*.
- [46] Yucheng Jin, Wanling Cai, Li Chen, Nyi N. Htun, and Katrien Verbert. 2019. MusicBot: Evaluating Critiquing-Based Music Recommenders with Conversational Interaction. In *CIKM'19. Proceedings of the 28th ACM International Conference on Information & Knowledge Management*. ACM Digital Library. Association for Computing Machinery, New York, 951–960. DOI: <https://doi.org/10.1145/3357384.3357923>.
- [47] Yucheng Jin, Li Chen, Wanling Cai, and Xianglin Zhao. 2023. CRS-Que : A User-Centric Evaluation Framework for Conversational Recommender Systems. *ACM Trans. Recomm. Syst.* DOI: <https://doi.org/10.1145/3631534>.
- [48] Yucheng Jin, Karsten Seipp, Erik Duval, and Katrien Verbert. 2016. Go With the Flow. In *Proceedings of the International Working Conference on Advanced Visual Interfaces*. ACM, New York, NY, 68–75. DOI: <https://doi.org/10.1145/2909132.2909269>.

- [49] Yucheng Jin, Nava Tintarev, and Katrien Verbert. 2018. Effects of personal characteristics on music recommender systems with different levels of controllability. *RecSys '18*, 13–21. DOI: <https://doi.org/10.1145/3240323.3240358>.
- [50] Soultana Karga and Maya Satratzemi. 2019. Evaluating Teachers' Perceptions of Learning Design Recommender Systems. In *Transforming learning with meaningful technologies. 4th European conference on technology enhanced learning, EC-TEL 2019, Delft, the Netherlands, September 16-19, 2019, proceedings*. Springer, Cham, Switzerland, 98–111. DOI: https://doi.org/10.1007/978-3-030-29736-7_8.
- [51] Enkelejda Kasneci, Kathrin Sessler, Stefan Küchemann, Maria Bannert, Daryna Dementieva, Frank Fischer, Urs Gasser, Georg Groh, Stephan Günemann, Eyke Hüllermeier, Stepha Krusche, Gitta Kutyniok, Tilman Michaeli, Claudia Nerdel, Jürgen Pfeffer, Oleksandra Poquet, Michael Sailer, Albrecht Schmidt, Tina Seidel, Matthias Stadler, Jochen Weller, Jochen Kuhn, and Gjergji Kasneci. 2023. ChatGPT for good? On opportunities and challenges of large language models for education. *Learning and Individual Differences* 103, 102274. DOI: <https://doi.org/10.1016/j.lindif.2023.102274>.
- [52] Xu Kerui, Yang Jingxuan, Xu Jun, Gao Sheng, and Wen Ji-Rong, Eds. 2021. *Adapting User Preference to Online Feedback in Multi-round Conversational Recommendation*. Association for Computing Machinery, New York, NY, USA.
- [53] James R. Kirk, Robert E. Wray, Peter Lindes, and John E. Laird. 2022. *Improving Language Model Prompting in Support of Semi-autonomous Task Learning*.
- [54] Takeshi Kojima, Shixiang Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2022. Large Language Models are Zero-Shot Reasoners. *Advances in Neural Information Processing Systems* 35, 22199–22213.
- [55] Sae B. Lee. 2020. Chatbots and Communication: The Growing Role of Artificial Intelligence in Addressing and Shaping Customer Needs. *Bus. Commun. Res. Pract.* 3, 2, 103–111. DOI: <https://doi.org/10.22682/bcrp.2020.3.2.103>.
- [56] Jiatong Li, Yunqing Liu, Wenqi Fan, Xiao-Yong Wei, Hui Liu, Jiliang Tang, and Qing Li. 2023. *Empowering Molecule Discovery for Molecule-Caption Translation with Large Language Models: A ChatGPT Perspective*.
- [57] Li-Hua Li, Rong-wang Hsu, and Fu-Ming Lee. 2011. Review of Recommender Systems and Their Application.
- [58] Seth Li and Elena Karahanna. 2015. Online Recommendation Systems in a B2C E-Commerce Context: A Review and Future Directions. *Journal of the Association for Information Systems* 16, 2, 72–107. DOI: <https://doi.org/10.17705/1jais.00389>.
- [59] Zekang Li, Jinchao Zhang, Zhengcong Fei, Yang Feng, and Jie Zhou. 2021. *Addressing Inquiries about History: An Efficient and Practical Framework for Evaluating Open-domain Chatbot Consistency*.
- [60] Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. 2021. *Pre-train, Prompt, and Predict: A Systematic Survey of Prompting Methods in Natural Language Processing*.
- [61] Yuanxing Liu, Wei-Nan Zhang, Yifan Chen, Yuchi Zhang, Haopeng Bai, Fan Feng, Hengbin Cui, Yongbin Li, and Wanxiang Che. 2023. *Conversational Recommender System and Large Language Model Are Made for Each Other in E-commerce Pre-sales Dialogue*.
- [62] Benedikt Loepp, Tim Hussein, and Jüergen Ziegler. 2014. Choice-based preference elicitation for collaborative filtering recommender systems. *CHI 2014, one of a CHIInd: conference proceedings*, 3085–3094. DOI: <https://doi.org/10.1145/2556288.2557069>.
- [63] Bei Luo, Raymond Y. K. Lau, Chunping Li, and Yain-Whar Si. 2022. A critical review of state-of-the-art chatbot designs and applications. *Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery* 12, 1, e1434. DOI: <https://doi.org/10.1002/widm.1434>.

- [64] Ahtsham Manzoor and Dietmar Jannach. 2021. Conversational recommendation based on end-to-end learning: How far are we? *Computers in Human Behavior Reports* 4, 100139. DOI: <https://doi.org/10.1016/j.chbr.2021.100139>.
- [65] Tariq Masood and Paul Sonntag. 2020. Industry 4.0: Adoption challenges and benefits for SMEs. *Computers in Industry* 121, 103261. DOI: <https://doi.org/10.1016/j.compind.2020.103261>.
- [66] McKinsey & Company. 2016. *The Age of Analytics: Competing in a Data-Driven World*. McKinsey & Company.
- [67] McKinsey & Company. 2023. *The Economic Potential of Generative AI: The Next Productivity Frontier*.
- [68] Microsoft Azure. 2023. *Azure OpenAI Service – Pricing | Microsoft Azure (2023)*. Retrieved October 28, 2023 from <https://azure.microsoft.com/de-de/pricing/details/cognitive-services/openai-service/>.
- [69] Swaroop Mishra and Elnaz Nouri. 2023. HELP ME THINK: A Simple Prompting Strategy for Non-experts to Create Customized Content with Models. *Findings of the Association for Computational Linguistics: ACL 2023*, 11834–11890. DOI: <https://doi.org/10.18653/v1/2023.findings-acl.751>.
- [70] Mohammad Moeini, Yasser Rahrovani, and Yolande E. Chan. 2019. A review of the practical relevance of IS strategy scholarly research. *The Journal of Strategic Information Systems* 28, 2, 196–217. DOI: <https://doi.org/10.1016/j.jsis.2018.12.003>.
- [71] Ipsita Mohanty. 2023. Recommendation Systems in the Era of LLMs. In *Proceedings of the 15th Annual Meeting of the Forum for Information Retrieval Evaluation*. ACM, New York, NY, USA. DOI: <https://doi.org/10.1145/3632754.3632941>.
- [72] Jamie Murphy, Charles Hofacker, and Ulrike Gretzel. 2017. Dawning of the Age of Robots in Hospitality and Tourism: Challenges for Teaching and Research. *EJTR* 15, 104–111. DOI: <https://doi.org/10.54055/ejtr.v15i.265>.
- [73] Quynh N. Nguyen, Anna Sidorova, and Russell Torres. 2022. User interactions with chatbot interfaces vs. Menu-based interfaces: An empirical study. *Computers in Human Behavior* 128, 107093. DOI: <https://doi.org/10.1016/j.chb.2021.107093>.
- [74] NVIDIA. 2021. *NVIDIA Announces Platform for Creating AI Avatars (2021)*. Retrieved April 22, 2024 from <https://nvidianews.nvidia.com/news/nvidia-announces-platform-for-creating-ai-avatars>.
- [75] NVIDIA. 2024. *Data Science Glossary: What is a Recommendation System? (2024)*. Retrieved February 24, 2024 from <https://www.nvidia.com/en-us/glossary/recommendation-system/>.
- [76] Joseph Ollier, Simon Neff, Christine Dworschak, Arber Sejdiqi, Prabhakaran Santhanam, Roman Keller, Grace Xiao, Alina Asisof, Dominik Rügger, Caterina Bérubé, Lena Hilfiker Tomas, Joël Neff, Jiali Yao, Aishah Alattas, Veronica Varela-Mato, Amanda Pitkethly, M^a D. Vara, Rocío Herrero, Rosa M. Baños, Carolina Parada, Rajashree S. Agatheswaran, Victor Villalobos, Olivia C. Keller, Wai S. Chan, Varun Mishra, Nicholas Jacobson, Catherine Stanger, Xinming He, Viktor von Wyl, Steffi Weidt, Severin Haug, Michael Schaub, Birgit Kleim, Jürgen Barth, Claudia Witt, Urte Scholz, Elgar Fleisch, Florian von Wangenheim, Lorainne T. Car, Falk Müller-Riemenschneider, Sandra Hauser-Ulrich, Alejandra N. Asomoza, Alicia Salamanca-Sanabria, Jacqueline L. Mair, and Tobias Kowatsch. 2021. Elena+ Care for COVID-19, a Pandemic Lifestyle Care Intervention: Intervention Design and Study Protocol. *Frontiers in public health* 9, 625640. DOI: <https://doi.org/10.3389/fpubh.2021.625640>.
- [77] Joseph Ollier, Marcia Nißen, and Florian von Wangenheim. 2021. The Terms of "You(s)": How the Term of Address Used by Conversational Agents Influences User Evaluations in French and German Linguaculture. *Frontiers in public health* 9, 691595. DOI: <https://doi.org/10.3389/fpubh.2021.691595>.

- [78] Joseph Ollier, Pavani Suryapalli, Elgar Fleisch, Florian von Wangenheim, Jacqueline L. Mair, Alicia Salamanca-Sanabria, and Tobias Kowatsch. 2023. Can digital health researchers make a difference during the pandemic? Results of the single-arm, chatbot-led Elena+: Care for COVID-19 interventional study. *Frontiers in public health* 11, 1185702. DOI: <https://doi.org/10.3389/fpubh.2023.1185702>.
- [79] Jeffrey Parsons and Paul Ralph. 2014. Generating Effective Recommendations Using Viewing-Time Weighted Preferences for Attributes. *Journal of the Association for Information Systems* 15, 8, 484–513. DOI: <https://doi.org/10.17705/1jais.00369>.
- [80] Bhavik Pathak, Robert Garfinkel, Ram D. Gopal, Rajkumar Venkatesan, and Fang Yin. 2010. Empirical Analysis of the Impact of Recommender Systems on Sales. *Journal of Management Information Systems* 27, 2, 159–188. DOI: <https://doi.org/10.2753/MIS0742-1222270205>.
- [81] Florian Pecune, Shruti Murali, Vivian Tsai, Yoichi Matsuyama, and Justine Cassell. 2019. A Model of Social Explanations for a Conversational Movie Recommendation System. In *Proceedings of the 7th International Conference on Human-Agent Interaction*. Association for Computing Machinery, [S.l.], 135–143. DOI: <https://doi.org/10.1145/3349537.3351899>.
- [82] Nikolaos Polatidis and Christos K. Georgiadis. 2013. Recommender Systems: The Importance of Personalization in E-Business Environments. *International Journal of E-Entrepreneurship and Innovation* 4, 4, 32–46. DOI: <https://doi.org/10.4018/ijeei.2013100103>.
- [83] Pearl Pu, Li Chen, and Rong Hu. 2011. A user-centric evaluation framework for recommender systems. In *Recsys 11 Proceedings of the Fifth Acm Conference on Recommender Systems*. Association for Computing Machinery, [Place of publication not identified], 157–164. DOI: <https://doi.org/10.1145/2043932.2043962>.
- [84] Pearl Pu, Li Chen, and Rong Hu. 2012. Evaluating recommender systems from the user’s perspective: survey of the state of the art. *User Model User-Adap Inter* 22, 4-5, 317–355. DOI: <https://doi.org/10.1007/s11257-011-9115-7>.
- [85] Lara Riefle and Carina Benz. 2021. User-specific Determinants of Conversational Agent Usage: A Review and Potential for Future Research. In *Innovation Through Information Systems: Volume II: A Collection of Latest Research on Technology Issues*. Ed.: F. Ahlemann, 115. DOI: https://doi.org/10.1007/978-3-030-86797-3_8.
- [86] Ohad Rubin, Jonathan Herzig, and Jonathan Berant. 2021. *Learning To Retrieve Prompts for In-Context Learning*.
- [87] Ryan Schuetzler, G. Grimes, Justin Giboney, and Holly Rosser. 2021. Deciding Whether and How to Deploy Chatbots. *MIS Quarterly Executive* 20, 1.
- [88] Moch A. Selamat and Nila A. Windasari. 2021. Chatbot for SMEs: Integrating customer and business owner perspectives. *Technology in Society* 66, 101685. DOI: <https://doi.org/10.1016/j.techsoc.2021.101685>.
- [89] Asmat A. Shaikh, Anuj Kumar, Asif A. Syed, and Mohammed Z. Shaikh. 2021. *A Two-Decade Literature Review on Challenges Faced by SMEs in Technology Adoption*.
- [90] Shavneet Sharma, Gurmeet Singh, Nazrul Islam, and Amandeep Dhir. 2024. Why Do SMEs Adopt Artificial Intelligence-Based Chatbots? *IEEE Trans. Eng. Manage.* 71, 1773–1786. DOI: <https://doi.org/10.1109/tem.2022.3203469>.
- [91] Nina Svenningsson and Montathar Faraon. 2019. Artificial Intelligence in Conversational Agents: A Study of Factors Related to Perceived Humanness in Chatbots. *Artificial Intelligence and Cloud Computing Conference*.
- [92] Róbert Szilágyi and Mihály Tóth. 2024. Use of LLM for SMEs, opportunities and challenges. *JAI* 14, 2. DOI: <https://doi.org/10.17700/jai.2023.14.2.703>.
- [93] Romal Thoppilan, Daniel de Freitas, Jamie Hall, Noam Shazeer, Apoorv Kulshreshtha, Heng-Tze Cheng, Alicia Jin, Taylor Bos, Leslie Baker, Du Yu, YaGuang Li, Hongrae Lee, Huaixiu S. Zheng, Amin Ghafouri, Marcelo Menegali, Yanping Huang, Maxim Krikun, Dmitry Lepikhin,

- James Qin, Dehao Chen, Yuanzhong Xu, Zhifeng Chen, Adam Roberts, Maarten Bosma, Vincent Zhao, Yanqi Zhou, Chung-Ching Chang, Igor Krivokon, Will Rusch, Marc Pickett, Pranesh Srinivasan, Laichee Man, Kathleen Meier-Hellstern, Meredith R. Morris, Tulsee Doshi, Renelito D. Santos, Toju Duke, Johnny Soraker, Ben Zevenbergen, Vinodkumar Prabhakaran, Mark Diaz, Ben Hutchinson, Kristen Olson, Alejandra Molina, Erin Hoffman-John, Josh Lee, Lora Aroyo, Ravi Rajakumar, Alena Butryna, Matthew Lamm, Viktoriya Kuzmina, Joe Fenton, Aaron Cohen, Rachel Bernstein, Ray Kurzweil, Blaise Aguera-Arcas, Claire Cui, Marian Croak, Ed Chi, and Le Quoc. 2022. *LaMDA: Language Models for Dialog Applications*.
- [94] Oguzhan Topsakal and Tahir C. Akinci. 2023. Creating Large Language Model Applications Utilizing LangChain: A Primer on Developing LLM Apps Fast. *ICAENS* 1, 1, 1050–1056. DOI: <https://doi.org/10.59287/icaens.1127>.
- [95] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. 2023. *LLaMA: Open and Efficient Foundation Language Models*.
- [96] Nikolaos Tzokas, Young A. Kim, Hammad Akbar, and Haya Al-Dajani. 2015. Absorptive capacity and performance: The role of customer relationship and technological capabilities in high-tech SMEs. *Industrial Marketing Management* 47, 134–142. DOI: <https://doi.org/10.1016/j.indmarman.2015.02.033>.
- [97] Arpita Vats, Vinija Jain, Rahul Raja, and Aman Chadha. 2024. *Exploring the Impact of Large Language Models on Recommender Systems: An Extensive Review*.
- [98] Jiaan Wang, Yunlong Liang, Fandong Meng, Zengkui Sun, Haoxiang Shi, Zhixu Li, Jinan Xu, Jianfeng Qu, and Jie Zhou. 2023. Is ChatGPT a Good NLG Evaluator? A Preliminary Study. *Proceedings of the 4th New Frontiers in Summarization Workshop*, 1–11. DOI: <https://doi.org/10.18653/v1/2023.newsum-1.1>.
- [99] Jiayin Wang, Weizhi Ma, Peijie Sun, Min Zhang, and Jian-Yun Nie. 2024. *Understanding User Experience in Large Language Model Interactions*.
- [100] Lei Wang and Ee-Peng Lim. 2023. *Zero-Shot Next-Item Recommendation using Large Pretrained Language Models*.
- [101] Lei Wang, Chen Ma, Xueyang Feng, Zeyu Zhang, Hao Yang, Jingsen Zhang, Zhiyuan Chen, Jiakai Tang, Xu Chen, Yankai Lin, Wayne X. Zhao, Zhewei Wei, and Ji-Rong Wen. 2023. *A Survey on Large Language Model based Autonomous Agents*.
- [102] Liang Wang, Nan Yang, and Furu Wei. 2023. *Learning to Retrieve In-Context Examples for Large Language Models*.
- [103] Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H. Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. 2022. *Emergent Abilities of Large Language Models*.
- [104] Shijie Wu, Ozan Irsoy, Steven Lu, Vadim Dabravolski, Mark Dredze, Sebastian Gehrmann, Prabhanjan Kambadur, David Rosenberg, and Gideon Mann. 2023. *BloombergGPT: A Large Language Model for Finance*.
- [105] Yuchen Xia, Manthan Shenoy, Nasser Jazdi, and Michael Weyrich. 2023. *Towards autonomous system: flexible modular production system enhanced with large language model agents*. DOI: <https://doi.org/10.1109/ETFA54631.2023.10275362>.
- [106] Wenpeng Yin, Qinyuan Ye, Pengfei Liu, Xiang Ren, and Hinrich Schütze. 2023. LLM-driven Instruction Following: Progresses and Concerns. *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing: Tutorial Abstracts*, 19–25. DOI: <https://doi.org/10.18653/v1/2023.emnlp-tutorial.4>.

- [107] Junjie Zhang, Ruobing Xie, Yupeng Hou, Wayne X. Zhao, Leyu Lin, and Ji-Rong Wen. 2023. *Recommendation as Instruction Following: A Large Language Model Empowered Recommendation Approach*.
- [108] Shuo Zhang and Krisztian Balog. 2020. *Evaluating Conversational Recommender Systems via User Simulation*. DOI: <https://doi.org/10.1145/3394486.3403202>.
- [109] Denny Zhou, Nathanael Schärli, Le Hou, Jason Wei, Nathan Scales, Xuezhi Wang, Dale Schuurmans, Claire Cui, Olivier Bousquet, Le Quoc, and Ed Chi. 2022. *Least-to-Most Prompting Enables Complex Reasoning in Large Language Models*.
- [110] Shi Zong, Josh Seltzer, Jiahua, Pan, Kathy Cheng, and Jimmy Lin. 2023. *Which Model Shall I Choose? Cost/Quality Trade-offs for Text Classification Tasks*.
- [111] Jie Zou, Yifan Chen, and Evangelos Kanoulas. 2020. Towards Question-based Recommender Systems. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval*. ACM Digital Library. Association for Computing Machinery, New York, NY, United States, 881–890. DOI: <https://doi.org/10.1145/3397271.3401180>.
- [112] Jie Zou and Evangelos Kanoulas. 2019. Learning to Ask. In *CIKM'19. Proceedings of the 28th ACM International Conference on Information & Knowledge Management*. ACM Digital Library. Association for Computing Machinery, New York, 369–378. DOI: <https://doi.org/10.1145/3357384.3357967>.

9 Appendices

A.1 Survey Constructs

ResQue dimension	Construct	Statement	References (adapted)
Perceived Quality	Recommendation Accuracy	The events/activities recommended to me matched my formulated intentions.	Colace et al. [2]
Perceived Quality	Interface Adequacy	I found the chatbot intuitive to use.	Colace et al. [2]
Perceived Quality	Consistency	The chatbot was consistent in its statements (no contradictions).	Chen et al. [1]
Perceived Quality	Coherence	The chatbot was coherent in its statements (logically coherent & understandable).	Colace et al. [2]
Perceived Quality	Input Processing Performance	I have the feeling the chatbot interpreted my request correctly.	Ren et al. [6], Colace et al. [2]
User Beliefs	Control	I felt in control of modifying my taste using the chatbot.	Jin et al. [4], Loepf et al. [5], Dietz et al. [3]
User Beliefs	Perceived Usefulness	The chatbot is useful for finding events/activities that match my interests.	Xu et al. [7]
User Attitudes	Confidence	I am confident I could use the chatbot to find events/activities.	Xu et al. [7]
User Attitudes	Overall Satisfaction	Overall, I am satisfied with the performance of the chatbot.	Jin et al. [4]
Behavioral Intentions	Future Use	I will use the system again in the future.	Jin et al. [4]

A.2 Structural Equation Modeling Results

Independent variable	Dependent variable	Unstandardized estimate (B)	Standardized estimate (β)	Standard Error	p-value
<i>Regressions</i>					
Overall Satisfaction	Future Use	0.566	.503	.131	<.001
Perceived Usefulness	Overall Satisfaction	0.573	.513	.126	<.001
Control	Overall Satisfaction	0.241	.212	.151	.111
Perceived Usefulness	Confidence	0.733	.683	.075	<.001
Input Processing Performance	Control	0.324	.319	.134	.015

Consistency	Control	0.093	.101	.124	.454
Coherence	Control	0.216	.216	.146	.139
Recommendation Accuracy	Perceived Usefulness	0.329	.36	.122	.007
Control	Perceived Usefulness	0.205	.202	.092	.025
Consistency	Perceived Usefulness	0.328	.352	.098	.001
Interface Adequacy	Perceived Usefulness	-0.035	-.028	.083	.676
Coherence	Perceived Usefulness	-0.021	.002	.106	.844